SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2017_fp_base = 2250

SPECrate®2017_fp_peak = 2360

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Dec-2025
Software Availability: Sep-2025

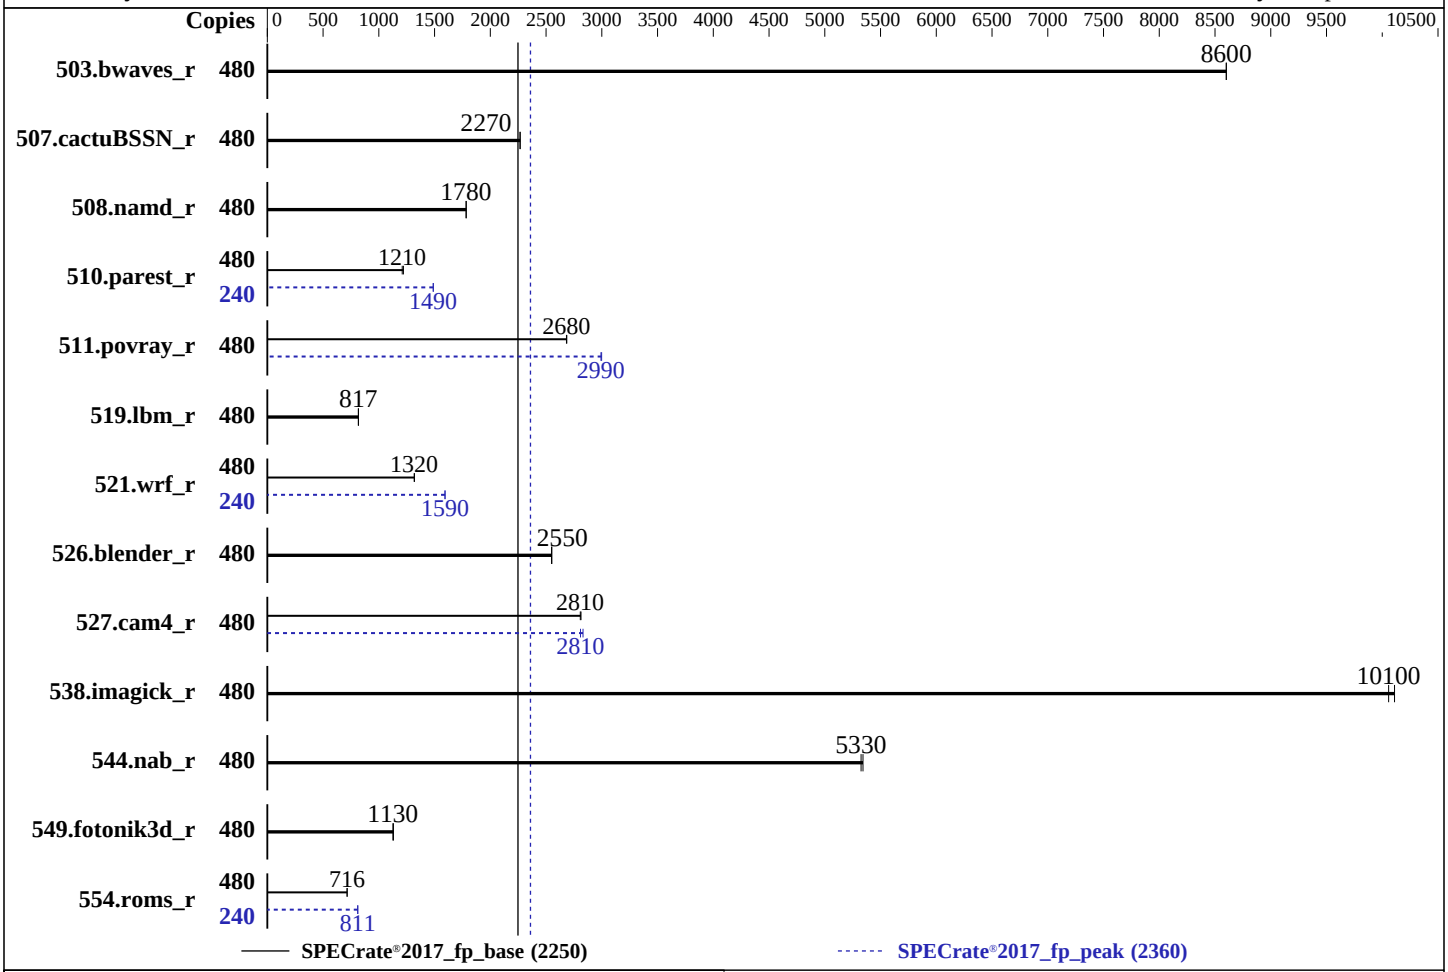

Hardware

CPU Name:	Intel Xeon 6978P
Max MHz:	3900
Nominal:	2100
Enabled:	240 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	504 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 3.2TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 16.0 6.12.0-160000.5-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.1.5 released Oct-2025
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2017_fp_base = 2250

SPECrate®2017_fp_peak = 2360

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Dec-2025
Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	**560**	**8600**	560	8600			480	**560**	**8600**	560	8600		
507.cactuBSSN_r	480	268	2270	**268**	**2270**			480	268	2270	**268**	**2270**		
508.namd_r	480	256	1780	**256**	**1780**			480	256	1780	**256**	**1780**		
510.parest_r	480	**1038**	**1210**	1029	1220			240	422	1490	**422**	**1490**		
511.povray_r	480	**418**	**2680**	417	2690			480	**375**	**2990**	374	3000		
519.lbm_r	480	**619**	**817**	619	817			480	**619**	**817**	619	817		
521.wrf_r	480	**816**	**1320**	815	1320			240	**337**	**1590**	337	1590		
526.blender_r	480	286	2550	**287**	**2550**			480	286	2550	**287**	**2550**		
527.cam4_r	480	298	2810	**299**	**2810**			480	**299**	**2810**	296	2830		
538.imagick_r	480	**119**	**10100**	118	10100			480	**119**	**10100**	118	10100		
544.nab_r	480	151	5340	**152**	**5330**			480	151	5340	**152**	**5330**		
549.fotonik3d_r	480	**1661**	**1130**	1654	1130			480	**1661**	**1130**	1654	1130		
554.roms_r	480	1066	716	**1066**	**716**			240	**470**	**811**	470	811		

SPECrate®2017_fp_base = 2250

SPECrate®2017_fp_peak = 2360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2025.2/lib/intel64:/home/cpu2017-1.1.9-ic2025.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
        Sub NUMA Cluster : Enabled

          System Profile : Custom
    CPU Power Management : Maximum Performance
                C-States : Autonomous
  Latency Optimized Mode : Enabled
 Energy Efficient Policy : Performance

Sysinfo program /home/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on R7703AP-R770AP Thu Nov 13 07:39:35 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux R7703AP-R770AP 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   07:39:35 up 11:09,  1 user,  load average: 229.31, 394.87, 432.32
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                20:30   11:06m  1.12s   ?    /bin/bash
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
```

(Continued on next page)

Platform Notes (Continued)

```
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) unlimited
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 3092753
   max locked memory           (kbytes, -l) 8192
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 3092753
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=47
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=240 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
   DL-VERS=6.4_T17 --output_format html,pdf,txt fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=240 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
   --define DL-VERS=6.4_T17 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
   refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log
   --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2025.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6978P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003f3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
    cpu cores       : 120
    siblings        : 240
    2 physical ids (chips)
    480 processors (hardware threads)
    physical id 0: core ids 0-39,64-103,128-167
    physical id 1: core ids 0-39,64-103,128-167
    physical id 0: apicids 0-79,128-207,256-335
    physical id 1: apicids 512-591,640-719,768-847
```

(Continued on next page)

Platform Notes (Continued)

```
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.41.1:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               480
  On-line CPU(s) list:                  0-479
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6978P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   120
  Socket(s):                            2
  Stepping:                             1
  BogoMIPS:                             4200.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                        cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                                        umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                        amx_tile amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            11.3 MiB (240 instances)
  L1i cache:                            15 MiB (240 instances)
  L2 cache:                             480 MiB (240 instances)
  L3 cache:                             1008 MiB (2 instances)
  NUMA node(s):                         6
  NUMA node0 CPU(s):                    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
                                        ,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,240,242,244,246,2
                                        48,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280
                                        ,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,3
                                        14,316,318
  NUMA node1 CPU(s):                    80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,
                                        118,120,122,124,126,128,130,132,134,136,138,140,142,144,146,148,15
                                        0,152,154,156,158,320,322,324,326,328,330,332,334,336,338,340,342,
                                        344,346,348,350,352,354,356,358,360,362,364,366,368,370,372,374,37
                                        6,378,380,382,384,386,388,390,392,394,396,398
  NUMA node2 CPU(s):                    160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,19
                                        2,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,
```

(Continued on next page)

Platform Notes (Continued)

```
                                     226,228,230,232,234,236,238,400,402,404,406,408,410,412,414,416,41
                                     8,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,
                                     452,454,456,458,460,462,464,466,468,470,472,474,476,478
  NUMA node3 CPU(s):                 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
                                     ,49,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,241,243,245,247,2
                                     49,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281
                                     ,283,285,287,289,291,293,295,297,299,301,303,305,307,309,311,313,3
                                     15,317,319
  NUMA node4 CPU(s):                 81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,
                                     119,121,123,125,127,129,131,133,135,137,139,141,143,145,147,149,15
                                     1,153,155,157,159,321,323,325,327,329,331,333,335,337,339,341,343,
                                     345,347,349,351,353,355,357,359,361,363,365,367,369,371,373,375,37
                                     7,379,381,383,385,387,389,391,393,395,397,399
  NUMA node5 CPU(s):                 161,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,19
                                     3,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,
                                     227,229,231,233,235,237,239,401,403,405,407,409,411,413,415,417,41
                                     9,421,423,425,427,429,431,433,435,437,439,441,443,445,447,449,451,
                                     453,455,457,459,461,463,465,467,469,471,473,475,477,479
  Vulnerability Gather data sampling: Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:       Not affected
  Vulnerability L1tf:                Not affected
  Vulnerability Mds:                 Not affected
  Vulnerability Meltdown:            Not affected
  Vulnerability Mmio stale data:     Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:            Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer
                                     sanitization
  Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                     PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:               Not affected
  Vulnerability Tsa:                 Not affected
  Vulnerability Tsx async abort:     Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    11.3M   12 Data            1     64        1             64
     L1i       64K      15M   16 Instruction     1     64        1             64
     L2         2M     480M   16 Unified         2   2048        1             64
     L3       504M    1008M   16 Unified         3 516096        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus:
  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,7
  4,76,78,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288
  ,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318
  node 0 size: 128562 MB
  node 0 free: 126299 MB
  node 1 cpus:
  80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,134,136,1
  38,140,142,144,146,148,150,152,154,156,158,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,
  352,354,356,358,360,362,364,366,368,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398
  node 1 size: 128953 MB
  node 1 free: 128527 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 cpus:
  160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
  ,214,216,218,220,222,224,226,228,230,232,234,236,238,400,402,404,406,408,410,412,414,416,418,420,422,424,42
  6,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478
  node 2 size: 128994 MB
  node 2 free: 128515 MB
  node 3 cpus:
  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,7
  5,77,79,241,243,245,247,249,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287,289
  ,291,293,295,297,299,301,303,305,307,309,311,313,315,317,319
  node 3 size: 128994 MB
  node 3 free: 128402 MB
  node 4 cpus:
  81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,135,137,1
  39,141,143,145,147,149,151,153,155,157,159,321,323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,
  353,355,357,359,361,363,365,367,369,371,373,375,377,379,381,383,385,387,389,391,393,395,397,399
  node 4 size: 128994 MB
  node 4 free: 128426 MB
  node 5 cpus:
  161,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,193,195,197,199,201,203,205,207,209,211,213
  ,215,217,219,221,223,225,227,229,231,233,235,237,239,401,403,405,407,409,411,413,415,417,419,421,423,425,42
  7,429,431,433,435,437,439,441,443,445,447,449,451,453,455,457,459,461,463,465,467,469,471,473,475,477,479
  node 5 size: 128915 MB
  node 5 free: 128293 MB
  node distances:
  node     0    1    2    3    4    5
     0:   10   15   17   21   28   26
     1:   15   10   15   23   26   23
     2:   17   15   10   26   23   21
     3:   21   28   26   10   15   17
     4:   23   26   23   15   10   15
     5:   26   23   21   17   15   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791977952 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
11. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                   bluetooth chronyd dbus-broker firewalld gdm getty@ irqbalance issue-generator kbdsettings
                   klog lvm2-monitor nvmefc-boot-connections nvmf-autoconnect rollback rsyslog smartd
                   soft-reboot-cleanup sshd systemd-pstore wpa_supplicant wtmpdb-update-boot
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   ca-certificates-setup chrony-wait console-getty cups debug-shell dnsmasq
                   gnome-remote-desktop gnome-remote-desktop-configuration gpm grub2-once hwloc-dump-hwdata
                   issue-add-ssh-keys kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl
                   kexec-load lastlog2-import lunmask lvm-devices-import man-db-create multipathd named
                   nftables nis-domainname pkcs11_eventmgr rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                   setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd speech-dispatcherd
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2 upower
                  wpa_supplicant@
  indirect        pcscd systemd-userdbd

------------------------------------------------------------
12. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
  root=UUID=0b344ecf-2e5a-4bf3-b6c0-aecf8a6f67c0
  mitigations=auto
  quiet
  security=selinux
  selinux=1

------------------------------------------------------------
13. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 16.0

------------------------------------------------------------
18. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2025.2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  892G   15G  877G   2% /home

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R770AP
    Product Family: PowerEdge
    Serial:         R7703AP

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x 00AD042300AD HMCG88AHBRA471N 32 GB 2 rank 6400
    18x 00AD063200AD HMCG88AHBRA286N 32 GB 2 rank 6400
    1x 00AD063200AD HMCG88AHBRA477N 32 GB 2 rank 6400
    4x 00AD063200AD HMCG88AHBRA478N 32 GB 2 rank 6400


------------------------------------------------------------
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.1.5
   BIOS Date:         10/22/2025
   BIOS Revision:     1.1
```

Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++            | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C         | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-13 08:39:34-0500.
Report generated on 2025-12-16 21:36:18 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.