SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770AP (Intel Xeon 6972P)

SPECrate®2017_fp_base = 2070

SPECrate®2017_fp_peak = 2150

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Dec-2025
Software Availability: Sep-2025

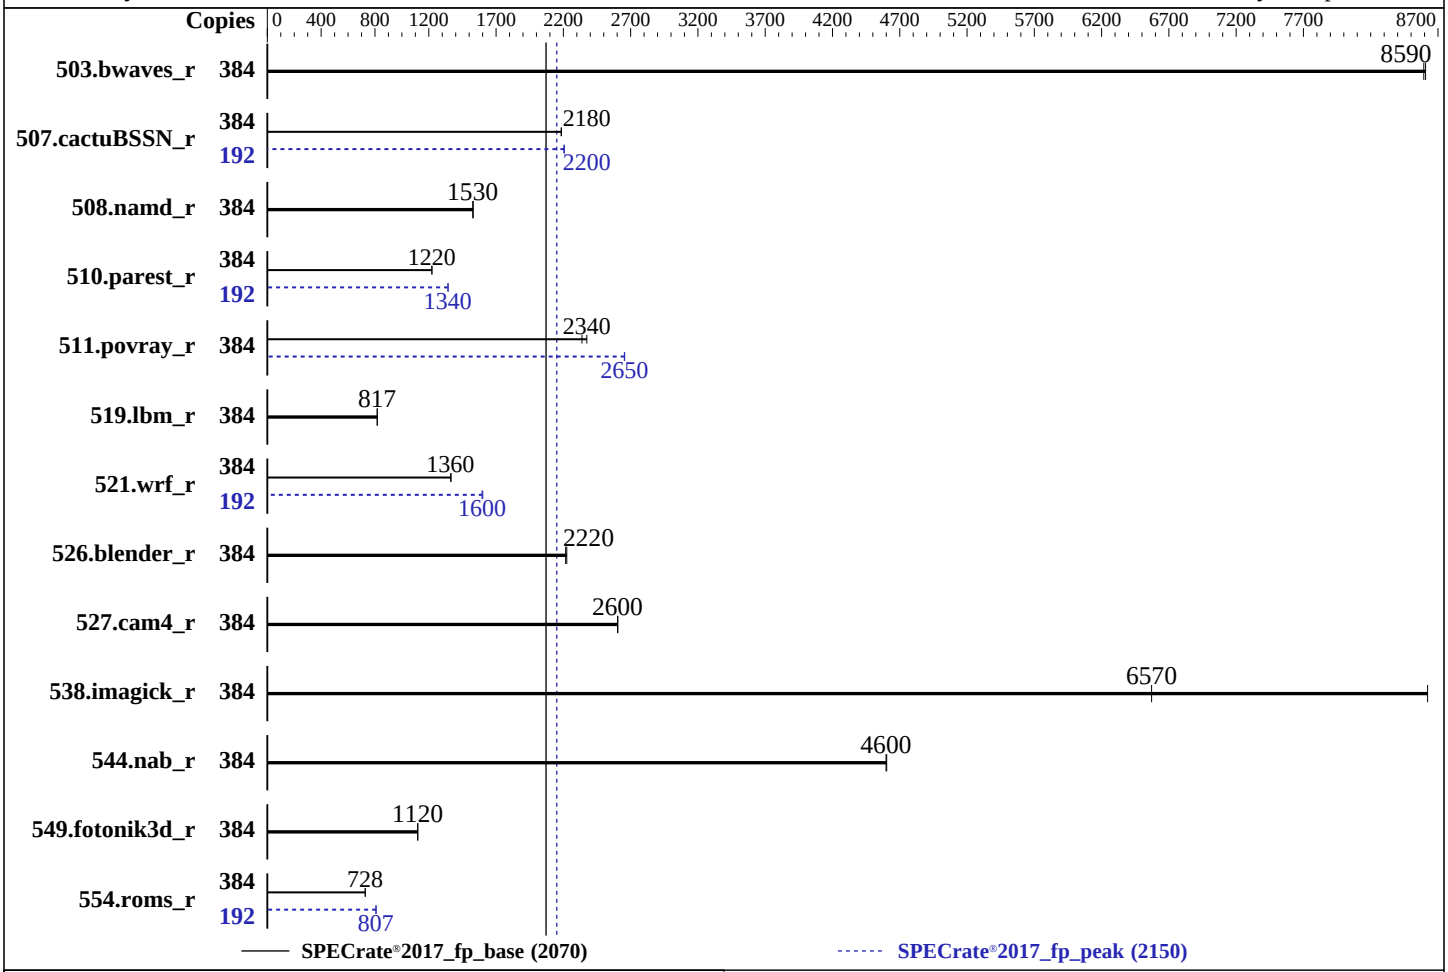

Hardware

CPU Name:	Intel Xeon 6972P
Max MHz:	3900
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	480 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	190 GB on tmpfs
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 16.0 6.12.0-160000.5-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.1.5 released Oct-2025
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770AP (Intel Xeon 6972P)

SPECrate®2017_fp_base = 2070

SPECrate®2017_fp_peak = 2150

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Dec-2025
Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	447	8610	**448**	**8590**			384	447	8610	**448**	**8590**		
507.cactuBSSN_r	384	**223**	**2180**	222	2190			192	110	2210	**110**	**2200**		
508.namd_r	384	**239**	**1530**	238	1530			384	**239**	**1530**	238	1530		
510.parest_r	384	821	1220	**822**	**1220**			192	374	1340	**374**	**1340**		
511.povray_r	384	**383**	**2340**	378	2370			384	338	2660	**338**	**2650**		
519.lbm_r	384	**496**	**817**	496	817			384	**496**	**817**	496	817		
521.wrf_r	384	630	1370	**631**	**1360**			192	269	1600	**270**	**1600**		
526.blender_r	384	263	2230	**264**	**2220**			384	263	2230	**264**	**2220**		
527.cam4_r	384	**258**	**2600**	258	2610			384	**258**	**2600**	258	2610		
538.imagick_r	384	111	8620	**145**	**6570**			384	111	8620	**145**	**6570**		
544.nab_r	384	140	4600	**141**	**4600**			384	140	4600	**141**	**4600**		
549.fotonik3d_r	384	**1339**	**1120**	1338	1120			384	**1339**	**1120**	1338	1120		
554.roms_r	384	**839**	**728**	838	728			192	377	809	**378**	**807**		

SPECrate®2017_fp_base = 2070

SPECrate®2017_fp_peak = 2150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
```

(Continued on next page)

General Notes (Continued)

```
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS Settings:
        Sub NUMA Cluster : Enabled

          System Profile : Custom
    CPU Power Management : Maximum Performance
                C-States : Autonomous
  Latency Optimized Mode : Enabled
 Energy Efficient Policy : Performance

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on R7703AP-R770AP Tue Nov 11 05:58:09 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux R7703AP-R770AP 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   05:58:09 up  9:19,  1 user,  load average: 260.98, 343.31, 360.70
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                20:40    9:14m  1.08s   ?    /bin/bash
```

(Continued on next page)

Platform Notes (Continued)

```
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) unlimited
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 3092893
  max locked memory           (kbytes, -l) 8192
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 3092893
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=47
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
   DL-VERS=6.4_T17 --output_format html,pdf,txt fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
   --define DL-VERS=6.4_T17 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
   refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log
   --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6972P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003f3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu cores       : 96
     siblings        : 192
     2 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-31,64-95,128-159
     physical id 1: core ids 0-31,64-95,128-159
     physical id 0: apicids 0-63,128-191,256-319
     physical id 1: apicids 512-575,640-703,768-831
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.41.1:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            GenuineIntel
   Model name:                           Intel(R) Xeon(R) 6972P
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            2
   Stepping:                             1
   BogoMIPS:                             4800.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                         cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                         cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                         flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                         bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                         avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                         cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                                         avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                                         umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                         bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                         serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                         amx_tile amx_int8 flush_l1d arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            9 MiB (192 instances)
   L1i cache:                            12 MiB (192 instances)
   L2 cache:                             384 MiB (192 instances)
   L3 cache:                             960 MiB (2 instances)
   NUMA node(s):                         6
   NUMA node0 CPU(s):                    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
                                         ,48,50,52,54,56,58,60,62,192,194,196,198,200,202,204,206,208,210,2
                                         12,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244
                                         ,246,248,250,252,254
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node1 CPU(s):                    64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,
                                         106,108,110,112,114,116,118,120,122,124,126,256,258,260,262,264,26
                                         6,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,
                                         300,302,304,306,308,310,312,314,316,318
   NUMA node2 CPU(s):                    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,16
                                         0,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,320,
                                         322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,35
                                         4,356,358,360,362,364,366,368,370,372,374,376,378,380,382
   NUMA node3 CPU(s):                    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
                                         ,49,51,53,55,57,59,61,63,193,195,197,199,201,203,205,207,209,211,2
                                         13,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245
                                         ,247,249,251,253,255
   NUMA node4 CPU(s):                    65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,
                                         107,109,111,113,115,117,119,121,123,125,127,257,259,261,263,265,26
                                         7,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,
                                         301,303,305,307,309,311,313,315,317,319
   NUMA node5 CPU(s):                    129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,16
                                         1,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,321,
                                         323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,35
                                         5,357,359,361,363,365,367,369,371,373,375,377,379,381,383
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Indirect target selection: Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer
                                         sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsa:                    Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K       9M   12 Data            1     64        1             64
      L1i       64K      12M   16 Instruction     1     64        1             64
      L2         2M     384M   16 Unified         2   2048        1             64
      L3       480M     960M   16 Unified         3 491520        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 6 nodes (0-5)
   node 0 cpus:
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,192,194,196,198,
   200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252
   ,254
   node 0 size: 128568 MB
   node 0 free: 116315 MB
   node 1 cpus:
   64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,1
   26,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,
   308,310,312,314,316,318
```

(Continued on next page)

Platform Notes (Continued)

```
  node 1 size: 129000 MB
  node 1 free: 127733 MB
  node 2 cpus:
  128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180
  ,182,184,186,188,190,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,36
  2,364,366,368,370,372,374,376,378,380,382
  node 2 size: 129000 MB
  node 2 free: 128293 MB
  node 3 cpus:
  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,193,195,197,199,
  201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253
  ,255
  node 3 size: 129000 MB
  node 3 free: 128288 MB
  node 4 cpus:
  65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,1
  27,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,301,303,305,307,
  309,311,313,315,317,319
  node 4 size: 128959 MB
  node 4 free: 128240 MB
  node 5 cpus:
  129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181
  ,183,185,187,189,191,321,323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,355,357,359,361,36
  3,365,367,369,371,373,375,377,379,381,383
  node 5 size: 128922 MB
  node 5 free: 128203 MB
  node distances:
  node     0    1    2    3    4    5
     0:   10   15   17   21   28   26
     1:   15   10   15   23   26   23
     2:   17   15   10   26   23   21
     3:   21   28   26   10   15   17
     4:   23   26   23   15   10   15
     5:   26   23   21   17   15   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792013796 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
11. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                   bluetooth chronyd dbus-broker firewalld gdm getty@ irqbalance issue-generator kbdsettings
                   klog lvm2-monitor nvmefc-boot-connections nvmf-autoconnect rollback rsyslog smartd
                   soft-reboot-cleanup sshd systemd-pstore wpa_supplicant wtmpdb-update-boot
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   ca-certificates-setup chrony-wait console-getty cups debug-shell dnsmasq
                   gnome-remote-desktop gnome-remote-desktop-configuration gpm grub2-once hwloc-dump-hwdata
                   issue-add-ssh-keys kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl
                   kexec-load lastlog2-import lunmask lvm-devices-import man-db-create multipathd named
                   nftables nis-domainname pkcs11_eventmgr rpmconfigcheck rsyncd rtkit-daemon serial-getty@
```

(Continued on next page)

Platform Notes (Continued)

```
                  setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd speech-dispatcherd
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2 upower
                  wpa_supplicant@
  indirect        pcscd systemd-userdbd

------------------------------------------------------------
12. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
  root=UUID=0b344ecf-2e5a-4bf3-b6c0-aecf8a6f67c0
  mitigations=auto
  quiet
  security=selinux
  selinux=1

------------------------------------------------------------
13. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
```

(Continued on next page)

Platform Notes (Continued)

```
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 16.0

------------------------------------------------------------
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  190G  5.8G  185G   4% /mnt/ramdisk

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R770AP
    Product Family: PowerEdge
    Serial:         R7703AP

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x 00AD042300AD HMCG88AHBRA471N 32 GB 2 rank 6400
    18x 00AD063200AD HMCG88AHBRA286N 32 GB 2 rank 6400
    1x 00AD063200AD HMCG88AHBRA477N 32 GB 2 rank 6400
    4x 00AD063200AD HMCG88AHBRA478N 32 GB 2 rank 6400


------------------------------------------------------------
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.1.5
   BIOS Date:         10/22/2025
   BIOS Revision:     1.1
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:

521.wrf_r: `-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

(Continued on next page)

Peak Optimization Flags (Continued)

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-11 06:58:08-0500.
Report generated on 2025-12-16 21:36:18 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.