# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770AP (Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Nov-2025
**Hardware Availability:** Nov-2025
**Software Availability:** Sep-2025

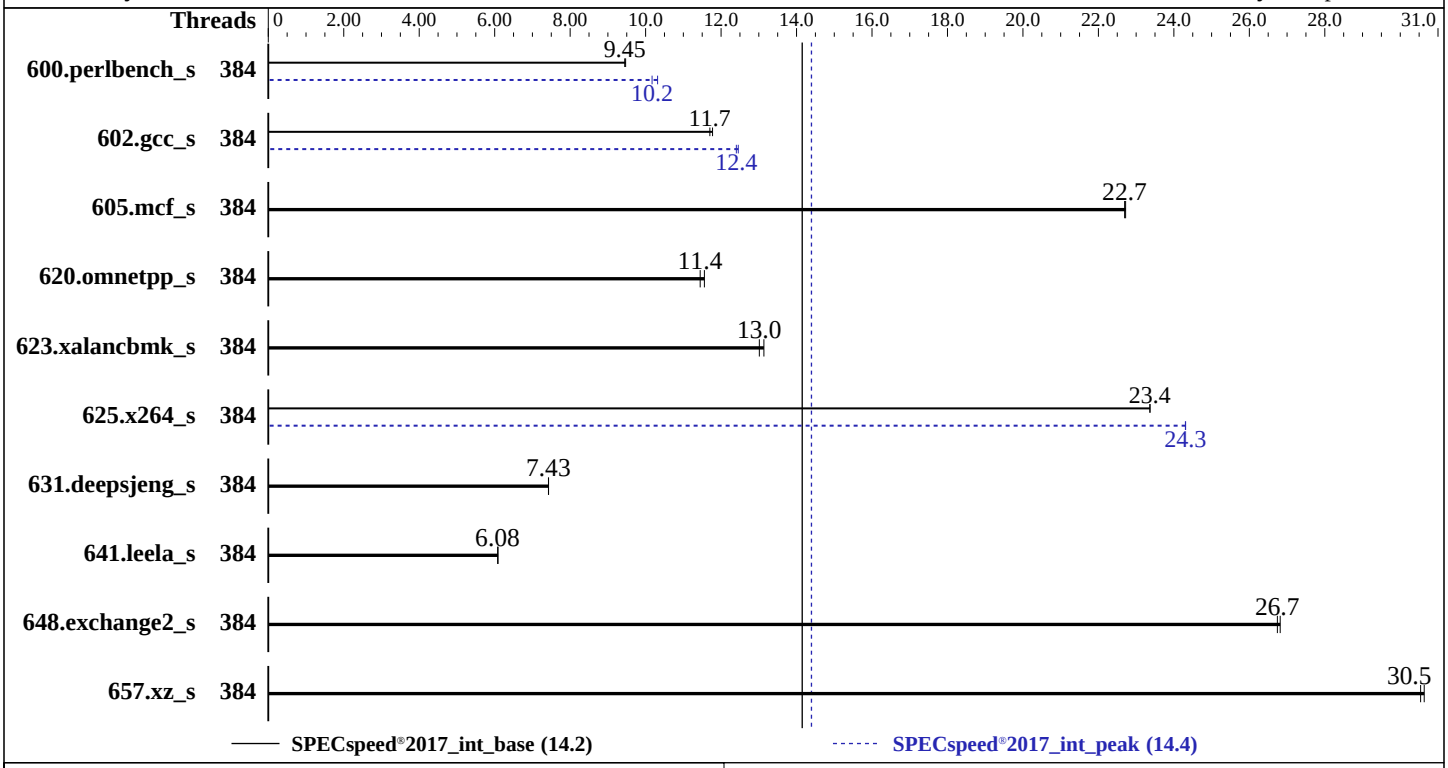


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6952P |
| Max MHz: | 3900 |
| Nominal: | 2100 |
| Enabled: | 192 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 480 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 190 GB on tmpfs |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 16.0<br>6.12.0-160000.4-default |
| Compiler: | C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2025.2 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Version 1.1.5 released Oct-2025 |
| File System: | tmpfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770AP (Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Nov-2025
**Hardware Availability:** Nov-2025
**Software Availability:** Sep-2025

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 384 | 187 | 9.47 | **188** | **9.45** | | | 384 | 172 | 10.3 | **175** | **10.2** | | |
| 602.gcc_s | 384 | 338 | 11.8 | **340** | **11.7** | | | 384 | 320 | 12.5 | **321** | **12.4** | | |
| 605.mcf_s | 384 | **208** | **22.7** | 208 | 22.7 | | | 384 | **208** | **22.7** | 208 | 22.7 | | |
| 620.omnetpp_s | 384 | **142** | **11.4** | 141 | 11.6 | | | 384 | **142** | **11.4** | 141 | 11.6 | | |
| 623.xalancbmk_s | 384 | **109** | **13.0** | 108 | 13.1 | | | 384 | **109** | **13.0** | 108 | 13.1 | | |
| 625.x264_s | 384 | **75.5** | **23.4** | 75.5 | 23.4 | | | 384 | 72.6 | 24.3 | **72.6** | **24.3** | | |
| 631.deepsjeng_s | 384 | **193** | **7.43** | 193 | 7.43 | | | 384 | **193** | **7.43** | 193 | 7.43 | | |
| 641.leela_s | 384 | **281** | **6.08** | 280 | 6.09 | | | 384 | **281** | **6.08** | 280 | 6.09 | | |
| 648.exchange2_s | 384 | **110** | **26.7** | 110 | 26.8 | | | 384 | **110** | **26.7** | 110 | 26.8 | | |
| 657.xz_s | 384 | 202 | 30.6 | **202** | **30.5** | | | 384 | 202 | 30.6 | **202** | **30.5** | | |

**SPECspeed®2017_int_base =** **14.2**

**SPECspeed®2017_int_peak =** **14.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
BIOS Settings:
          Sub NUMA Cluster : Enabled
```

**(Continued on next page)**

## Platform Notes (Continued)

```
            System Profile : Custom
      CPU Power Management : Maximum Performance
                     C1E : Disabled
                  C-States : Autonomous
    Latency Optimized Mode : Enabled
   Energy Efficient Policy : Performance
       DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on S123456-R770AP Thu Nov  6 15:55:52 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux S123456-R770AP 6.12.0-160000.4-default #1 SMP PREEMPT_DYNAMIC Wed Aug 20 16:45:35 UTC 2025 (1147121)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   15:55:52 up 2 min,  1 user,  load average: 6.22, 5.16, 2.13
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                15:54   32.00s  0.84s   ?    /bin/bash
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   core file size              (blocks, -c) unlimited
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 6189468
   max locked memory           (kbytes, -l) 8192
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 6189468
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=47
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=192 --tune base,peak -o all --define
   intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define DL-VERS=6.4_T17
   --output_format html,pdf,txt intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=192 --tune base,peak --output_format all
   --define intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define DL-VERS=6.4_T17
   --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6952P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003f3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-31,64-95,128-159
    physical id 1: core ids 0-31,64-95,128-159
    physical id 0: apicids 0-63,128-191,256-319
    physical id 1: apicids 512-575,640-703,768-831
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
```

(Continued on next page)

## Platform Notes (Continued)

```
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.41.1:
  Architecture:                            x86_64
  CPU op-mode(s):                          32-bit, 64-bit
  Address sizes:                           52 bits physical, 57 bits virtual
  Byte Order:                              Little Endian
  CPU(s):                                  384
  On-line CPU(s) list:                     0-383
  Vendor ID:                               GenuineIntel
  Model name:                              Intel(R) Xeon(R) 6952P
  CPU family:                              6
  Model:                                   173
  Thread(s) per core:                      2
  Core(s) per socket:                      96
  Socket(s):                               2
  Stepping:                                1
  BogoMIPS:                                4200.00
  Flags:                                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                           pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                           pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                           nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                           pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                           cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                           tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                           3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                           cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                           flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                           bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                           avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                           avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                           cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                                           avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                                           umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                           avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                           bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                           serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                           amx_tile amx_int8 flush_l1d arch_capabilities
  Virtualization:                          VT-x
  L1d cache:                               9 MiB (192 instances)
  L1i cache:                               12 MiB (192 instances)
  L2 cache:                                384 MiB (192 instances)
  L3 cache:                                960 MiB (2 instances)
  NUMA node(s):                            6
  NUMA node0 CPU(s):                       0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
                                           ,48,50,52,54,56,58,60,62,192,194,196,198,200,202,204,206,208,210,2
                                           12,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244
                                           ,246,248,250,252,254
  NUMA node1 CPU(s):                       64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,
                                           106,108,110,112,114,116,118,120,122,124,126,256,258,260,262,264,26
                                           6,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,
                                           300,302,304,306,308,310,312,314,316,318
  NUMA node2 CPU(s):                       128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,16
                                           0,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,320,
                                           322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,35
                                           4,356,358,360,362,364,366,368,370,372,374,376,378,380,382
  NUMA node3 CPU(s):                       1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
```

(Continued on next page)

## Platform Notes (Continued)

```
                                       ,49,51,53,55,57,59,61,63,193,195,197,199,201,203,205,207,209,211,2
                                       13,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245
                                       ,247,249,251,253,255
  NUMA node4 CPU(s):                   65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,
                                       107,109,111,113,115,117,119,121,123,125,127,257,259,261,263,265,26
                                       7,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,
                                       301,303,305,307,309,311,313,315,317,319
  NUMA node5 CPU(s):                   129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,16
                                       1,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,321,
                                       323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,35
                                       5,357,359,361,363,365,367,369,371,373,375,377,379,381,383
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer
                                       sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsa:                   Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1     64        1             64
     L1i       64K      12M   16 Instruction     1     64        1             64
     L2         2M     384M   16 Unified         2   2048        1             64
     L3       480M     960M   16 Unified         3 491520        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus:
  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,192,194,196,198,
  200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252
  ,254
  node 0 size: 257593 MB
  node 0 free: 244779 MB
  node 1 cpus:
  64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,1
  26,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,
  308,310,312,314,316,318
  node 1 size: 258024 MB
  node 1 free: 257766 MB
  node 2 cpus:
  128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180
  ,182,184,186,188,190,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,36
  2,364,366,368,370,372,374,376,378,380,382
  node 2 size: 258024 MB
  node 2 free: 257792 MB
  node 3 cpus:
```

(Continued on next page)

## Platform Notes (Continued)

```
  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,193,195,197,199,
  201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253
  ,255
  node 3 size: 258024 MB
  node 3 free: 257792 MB
  node 4 cpus:
  65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,1
  27,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,301,303,305,307,
  309,311,313,315,317,319
  node 4 size: 257983 MB
  node 4 free: 257728 MB
  node 5 cpus:
  129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181
  ,183,185,187,189,191,321,323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,355,357,359,361,36
  3,365,367,369,371,373,375,377,379,381,383
  node 5 size: 257946 MB
  node 5 free: 257717 MB
  node distances:
  node     0    1    2    3    4    5
     0:   10   15   17   21   28   26
     1:   15   10   15   23   26   23
     2:   17   15   10   26   23   21
     3:   21   28   26   10   15   17
     4:   23   26   23   15   10   15
     5:   26   23   21   17   15   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584738196 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
11. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                   chronyd dbus-broker getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor
                   nvmefc-boot-connections nvmf-autoconnect rollback rsyslog smartd soft-reboot-cleanup sshd
                   systemd-pstore wpa_supplicant wtmpdb-update-boot
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
                   console-getty debug-shell dnsmasq firewalld gpm grub2-once hwloc-dump-hwdata
                   issue-add-ssh-keys kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import
                   man-db-create multipathd nftables nis-domainname rpmconfigcheck rsyncd serial-getty@
                   setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2
                   wpa_supplicant@
  indirect         systemd-userdbd

------------------------------------------------------------
12. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.4-default
  root=UUID=9b0401aa-833f-4a1e-8142-20520f9bf468
  mitigations=auto
```

(Continued on next page)

## Platform Notes (Continued)

```
  quiet
  security=selinux
  selinux=1

------------------------------------------------------------
13. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 16.0

------------------------------------------------------------
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
  Filesystem     Type   Size  Used Avail Use% Mounted on
```

(Continued on next page)

## Platform Notes (Continued)

```
  tmpfs          tmpfs  190G  5.8G  185G   4% /mnt/ramdisk

 ------------------------------------------------------------
 19. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R770AP
     Product Family: PowerEdge
     Serial:         S123456

 ------------------------------------------------------------
 20. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     15x 002C069D002C MTC40F2046S1RC64BD1 USFF 64 GB 2 rank 6400
     7x 002C069D002C MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400
     1x 00AD042300AD HMCG94AHBRA480N 64 GB 2 rank 6400
     1x 00AD063200AD HMCG94AHBRA283N 64 GB 2 rank 6400


 ------------------------------------------------------------
 21. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.1.5
    BIOS Date:         10/22/2025
    BIOS Revision:     1.1
```

## Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

## Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

657.xz_s: `basepeak = yes`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-06 09:55:51-0500.
Report generated on 2025-12-16 21:36:30 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.