# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770AP (Intel Xeon 6952P)

**SPECrate®2017_int_base = 1810**

**SPECrate®2017_int_peak = 1830**

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Nov-2025
**Hardware Availability:** Nov-2025
**Software Availability:** Aug-2025

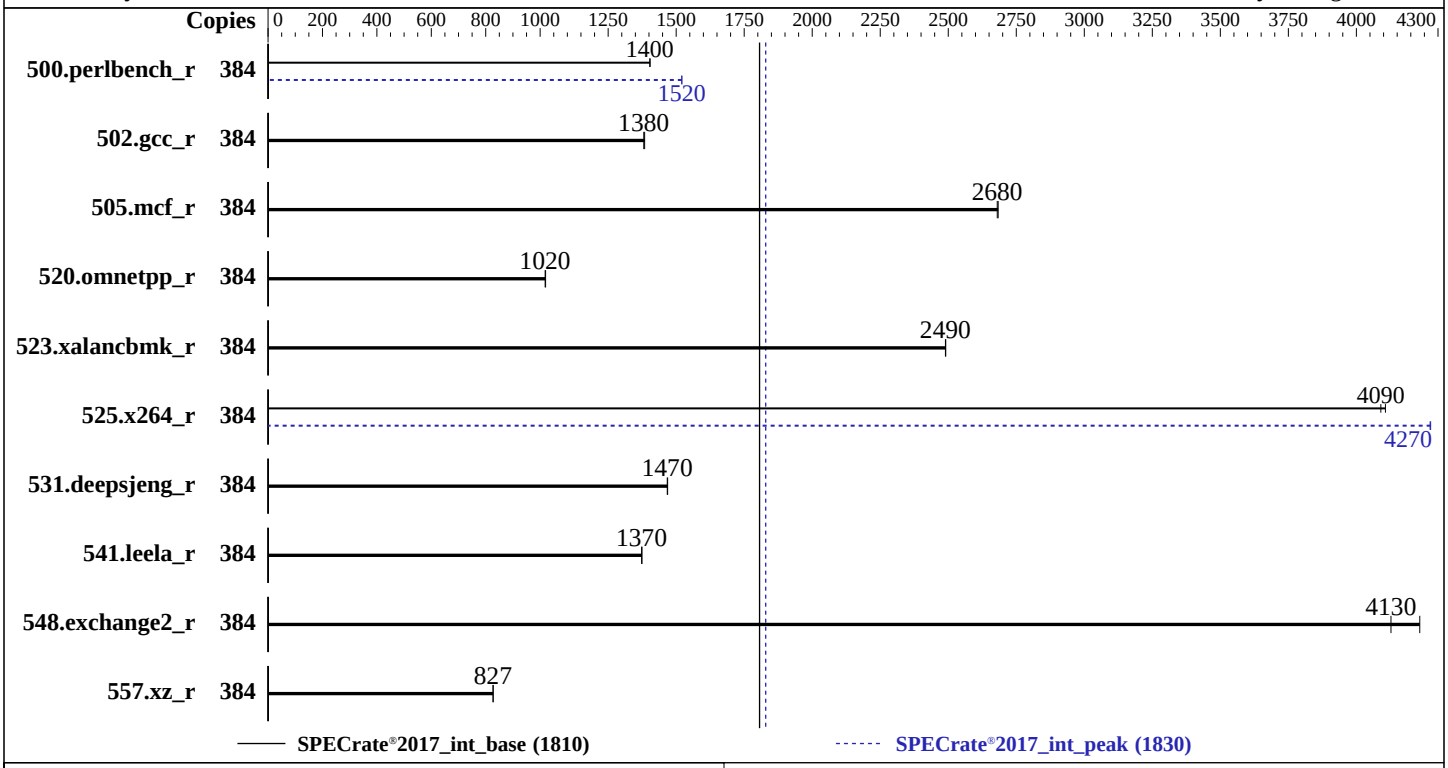


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6952P |
| Max MHz: | 3900 |
| Nominal: | 2100 |
| Enabled: | 192 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 480 MB I+D on chip per chip |
| Other: | None |
| Memory: | 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R) |
| Storage: | 190 GB on tmpfs |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 16.0<br>6.12.0-160000.20-default |
| Compiler: | C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2025.2 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Version 1.1.5 released Oct-2025 |
| File System: | tmpfs |
| System State: | Run level 5 (graphical multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770AP (Intel Xeon 6952P)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1830

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Nov-2025
**Hardware Availability:** Nov-2025
**Software Availability:** Aug-2025

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 384 | **436** | **1400** | 435 | 1400 | | | 384 | **402** | **1520** | 402 | 1520 | | |
| 502.gcc_r | 384 | **394** | **1380** | 393 | 1380 | | | 384 | **394** | **1380** | 393 | 1380 | | |
| 505.mcf_r | 384 | **232** | **2680** | 231 | 2680 | | | 384 | **232** | **2680** | 231 | 2680 | | |
| 520.omnetpp_r | 384 | 494 | 1020 | **495** | **1020** | | | 384 | 494 | 1020 | **495** | **1020** | | |
| 523.xalancbmk_r | 384 | 163 | 2490 | **163** | **2490** | | | 384 | 163 | 2490 | **163** | **2490** | | |
| 525.x264_r | 384 | 164 | 4110 | **164** | **4090** | | | 384 | 157 | 4270 | **157** | **4270** | | |
| 531.deepsjeng_r | 384 | **300** | **1470** | 300 | 1470 | | | 384 | **300** | **1470** | 300 | 1470 | | |
| 541.leela_r | 384 | **463** | **1370** | 463 | 1370 | | | 384 | **463** | **1370** | 463 | 1370 | | |
| 548.exchange2_r | 384 | 238 | 4230 | **244** | **4130** | | | 384 | 238 | 4230 | **244** | **4130** | | |
| 557.xz_r | 384 | **502** | **827** | 501 | 827 | | | 384 | **502** | **827** | 501 | 827 | | |

**SPECrate®2017_int_base =** **1810**

**SPECrate®2017_int_peak =** **1830**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.9-ic2025.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
BIOS Settings:
        Sub NUMA Cluster : Enabled
 SST-Performance Profile : Operating Point 2 | P1: 2.5 GHz, TDP:400w, Core Count:96

          System Profile : Custom
    CPU Power Management : Maximum Performance
                C-States : Autonomous
  Latency Optimized Mode : Enabled
 Energy Efficient Policy : Performance

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on NDN1035-R770AP Sat Nov 15 16:09:19 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux NDN1035-R770AP 6.12.0-160000.20-default #1 SMP PREEMPT_DYNAMIC Mon Jul 21 10:20:07 UTC 2025 (b00eabe)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   16:09:19 up 2 min,  1 user,  load average: 8.32, 5.85, 2.42
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                16:07    6.00s  0.97s   ?    /bin/bash
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
```

**(Continued on next page)**

## Platform Notes (Continued)

```
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) unlimited
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 3092901
  max locked memory           (kbytes, -l) 8192
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 3092901
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=47
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
   html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
   DL-VERS=6.4_T17 --output_format html,pdf,txt intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
   --define DL-VERS=6.4_T17 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
   refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
   --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6952P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003f3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-31,64-95,128-159
    physical id 1: core ids 0-31,64-95,128-159
    physical id 0: apicids 0-63,128-191,256-319
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    physical id 1: apicids 512-575,640-703,768-831
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.41.1:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               384
  On-line CPU(s) list:                  0-383
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6952P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   96
  Socket(s):                            2
  Stepping:                             1
  BogoMIPS:                             5000.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                        cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                                        umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                        amx_tile amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            9 MiB (192 instances)
  L1i cache:                            12 MiB (192 instances)
  L2 cache:                             384 MiB (192 instances)
  L3 cache:                             960 MiB (2 instances)
  NUMA node(s):                         6
  NUMA node0 CPU(s):                    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
                                        ,48,50,52,54,56,58,60,62,192,194,196,198,200,202,204,206,208,210,2
                                        12,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244
                                        ,246,248,250,252,254
  NUMA node1 CPU(s):                    64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,
                                        106,108,110,112,114,116,118,120,122,124,126,256,258,260,262,264,26
                                        6,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,
                                        300,302,304,306,308,310,312,314,316,318
  NUMA node2 CPU(s):                    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,16
                                        0,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,320,
                                        322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,35
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                                        4,356,358,360,362,364,366,368,370,372,374,376,378,380,382
  NUMA node3 CPU(s):                    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
                                        ,49,51,53,55,57,59,61,63,193,195,197,199,201,203,205,207,209,211,2
                                        13,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245
                                        ,247,249,251,253,255
  NUMA node4 CPU(s):                    65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,
                                        107,109,111,113,115,117,119,121,123,125,127,257,259,261,263,265,26
                                        7,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,
                                        301,303,305,307,309,311,313,315,317,319
  NUMA node5 CPU(s):                    129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,16
                                        1,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,321,
                                        323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,35
                                        5,357,359,361,363,365,367,369,371,373,375,377,379,381,383
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer
                                        sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                        PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsa:                    Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1     64        1             64
     L1i       64K      12M   16 Instruction     1     64        1             64
     L2         2M     384M   16 Unified         2   2048        1             64
     L3       480M     960M   16 Unified         3 491520        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus:
  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,192,194,196,198,
  200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252
  ,254
  node 0 size: 128568 MB
  node 0 free: 115260 MB
  node 1 cpus:
  64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,1
  26,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,
  308,310,312,314,316,318
  node 1 size: 129000 MB
  node 1 free: 128693 MB
  node 2 cpus:
  128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180
  ,182,184,186,188,190,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,36
  2,364,366,368,370,372,374,376,378,380,382
  node 2 size: 129000 MB
```

(Continued on next page)

## Platform Notes (Continued)

```
  node 2 free: 128691 MB
  node 3 cpus:
  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,193,195,197,199,
  201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253
  ,255
  node 3 size: 128959 MB
  node 3 free: 128674 MB
  node 4 cpus:
  65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,1
  27,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,301,303,305,307,
  309,311,313,315,317,319
  node 4 size: 129000 MB
  node 4 free: 128693 MB
  node 5 cpus:
  129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181
  ,183,185,187,189,191,321,323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,355,357,359,361,36
  3,365,367,369,371,373,375,377,379,381,383
  node 5 size: 128922 MB
  node 5 free: 128631 MB
  node distances:
  node     0    1    2    3    4    5
     0:   10   15   17   21   28   26
     1:   15   10   15   23   26   23
     2:   17   15   10   26   23   21
     3:   21   28   26   10   15   17
     4:   23   26   23   15   10   15
     5:   26   23   21   17   15   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792014292 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  Default Target  Status
  graphical       running

------------------------------------------------------------
11. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                   chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nvmefc-boot-connections nvmf-autoconnect rollback rsyslog smartd
                   soft-reboot-cleanup systemd-pstore wpa_supplicant wtmpdb-update-boot
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
                   console-getty debug-shell dnsmasq gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys
                   kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import man-db-create
                   multipathd nftables nis-domainname rpmconfigcheck rsyncd serial-getty@
                   setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd sshd
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2
                   wpa_supplicant@
  indirect         systemd-userdbd

------------------------------------------------------------
12. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.20-default
```

(Continued on next page)

## Platform Notes (Continued)

```
  root=UUID=e849977e-7169-4917-b3d0-cfe8c813bf4d
  mitigations=auto
  quiet
  security=selinux
  selinux=1

------------------------------------------------------------
13. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 16.0

------------------------------------------------------------
18. Disk information
```

(Continued on next page)

## Platform Notes (Continued)

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  190G  5.8G  185G   4% /mnt/ramdisk

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R770AP
    Product Family: PowerEdge
    Serial:         NDN1035

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    15x 002C0632002C MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
    9x 002C069D002C MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400


------------------------------------------------------------
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.1.5
   BIOS Date:         10/22/2025
   BIOS Revision:     1.1
```

## Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

## Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow -fno-strict-aliasing
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmalloc

502.gcc_r: basepeak = yes

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

**(Continued on next page)**

## Peak Optimization Flags (Continued)

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18a.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18a.xml`


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-15 10:09:17-0500.
Report generated on 2025-12-16 21:36:29 by CPU2017 PS formatter v6716.
Originally published on 2025-12-16.