SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-522GA-NRT
(X14DBG-AP, Intel Xeon 6960P)

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1800

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2025
Hardware Availability: Dec-2024
Software Availability: Oct-2025

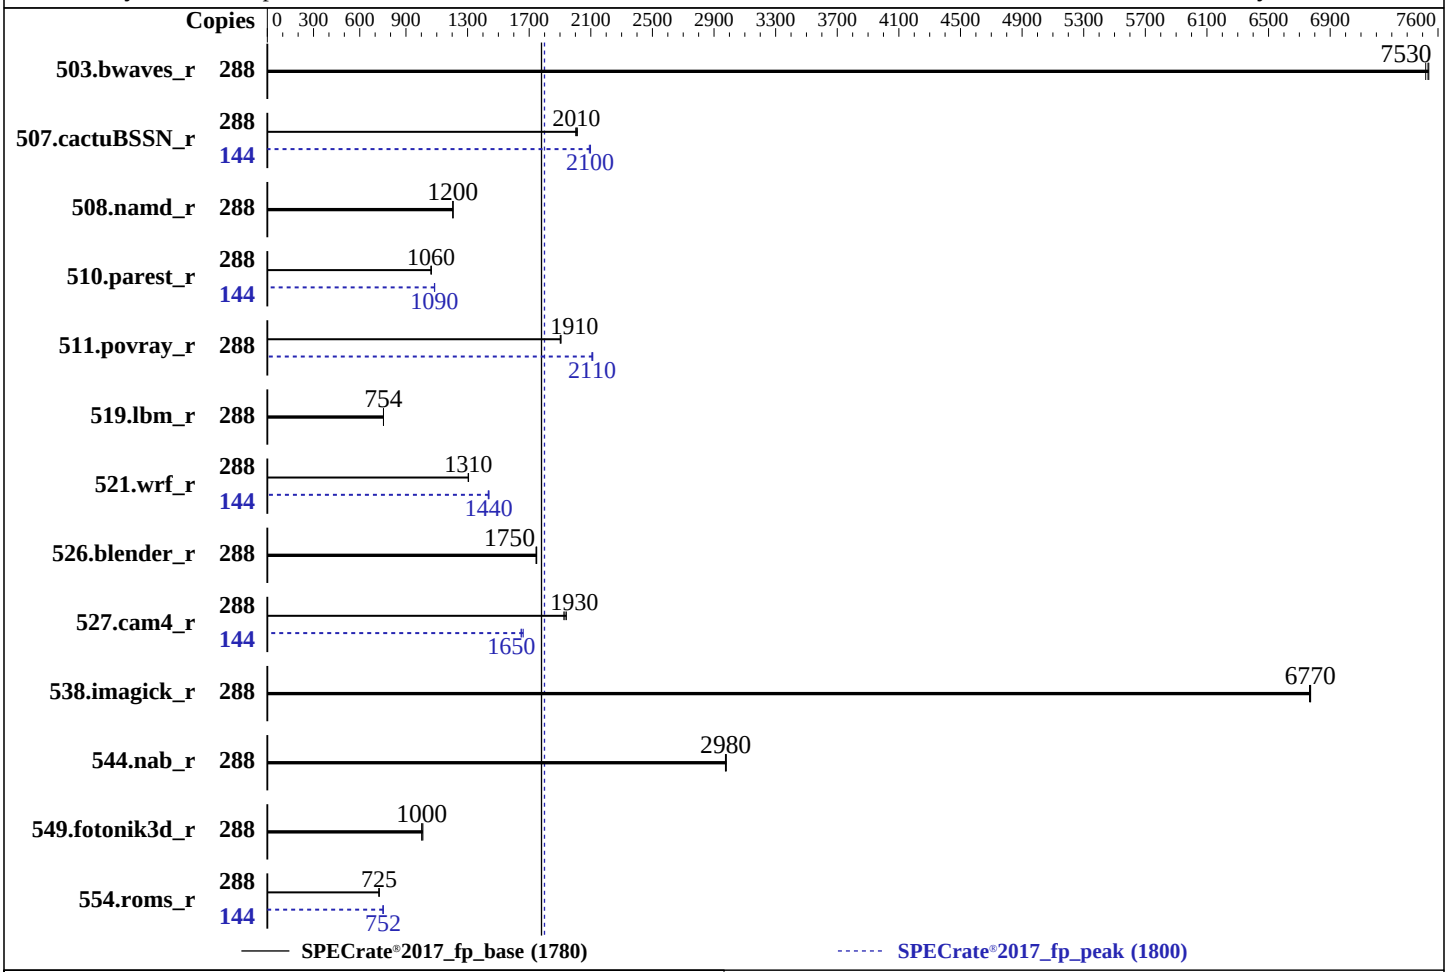

Hardware

CPU Name:	Intel Xeon 6960P
Max MHz:	3900
Nominal:	2700
Enabled:	144 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	432 MB I+D on chip per chip
Other:	None
Memory:	2304 GB (24 x 96 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 4.0TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.4 Released Jul-2025
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-522GA-NRT
(X14DBG-AP, Intel Xeon 6960P)

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1800

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2025
Hardware Availability: Dec-2024
Software Availability: Oct-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	384	7520	383	7540	**383**	**7530**	288	384	7520	383	7540	**383**	**7530**
507.cactuBSSN_r	288	182	2000	181	2010	**182**	**2010**	144	87.2	2090	**87.0**	**2100**	86.9	2100
508.namd_r	288	**227**	**1200**	227	1200	227	1210	288	**227**	**1200**	227	1200	227	1210
510.parest_r	288	709	1060	**708**	**1060**	708	1060	144	347	1090	**347**	**1090**	347	1080
511.povray_r	288	354	1900	**353**	**1910**	353	1910	288	318	2110	**319**	**2110**	319	2110
519.lbm_r	288	403	754	403	754	**403**	**754**	288	403	754	403	754	**403**	**754**
521.wrf_r	288	495	1300	**494**	**1310**	494	1310	144	**224**	**1440**	224	1440	225	1430
526.blender_r	288	**251**	**1750**	251	1750	251	1740	288	**251**	**1750**	251	1750	251	1740
527.cam4_r	288	262	1930	**261**	**1930**	259	1940	144	152	1660	**153**	**1650**	153	1650
538.imagick_r	288	**106**	**6770**	106	6770	106	6770	288	**106**	**6770**	106	6770	106	6770
544.nab_r	288	163	2970	**163**	**2980**	163	2980	288	163	2970	**163**	**2980**	163	2980
549.fotonik3d_r	288	**1118**	**1000**	1120	1000	1111	1010	288	**1118**	**1000**	1120	1000	1111	1010
554.roms_r	288	631	725	**631**	**725**	630	726	144	304	752	304	752	**304**	**752**

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017-1.1.9/lib/intel64:/root/cpu2017-1.1.9/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC = Enable

 Sysinfo program /root/cpu2017-1.1.9/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 153-181 Thu Dec  4 15:56:29 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux 153-181 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
   x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    15:56:30 up  5:24,  1 user,  load average: 202.33, 266.16, 276.43
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                10:34    5:20m  1.17s  0.05s -bash
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 9287028
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 9287028
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
   ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
   ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6960P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003d0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 72
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-23,64-87,128-151
    physical id 1: core ids 0-23,64-87,128-151
    physical id 0: apicids 0-47,128-175,256-303
    physical id 1: apicids 512-559,640-687,768-815
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               288
  On-line CPU(s) list:                  0-287
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6960P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   72
  Socket(s):                            2
  Stepping:                             1
  CPU(s) scaling MHz:                   21%
  CPU max MHz:                          3900.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             5400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                        vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                        amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            6.8 MiB (144 instances)
  L1i cache:                            9 MiB (144 instances)
  L2 cache:                             288 MiB (144 instances)
  L3 cache:                             864 MiB (2 instances)
  NUMA node(s):                         6
  NUMA node0 CPU(s):                    0-23,144-167
  NUMA node1 CPU(s):                    24-47,168-191
  NUMA node2 CPU(s):                    48-71,192-215
  NUMA node3 CPU(s):                    72-95,216-239
  NUMA node4 CPU(s):                    96-119,240-263
  NUMA node5 CPU(s):                    120-143,264-287
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     6.8M   12 Data            1     64        1             64
     L1i       64K       9M   16 Instruction     1     64        1             64
     L2         2M     288M   16 Unified         2   2048        1             64
     L3       432M     864M   16 Unified         3 442368        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus: 0-23,144-167
  node 0 size: 386571 MB
  node 0 free: 363752 MB
  node 1 cpus: 24-47,168-191
  node 1 size: 387058 MB
  node 1 free: 366850 MB
  node 2 cpus: 48-71,192-215
  node 2 size: 387058 MB
  node 2 free: 366583 MB
  node 3 cpus: 72-95,216-239
  node 3 size: 387058 MB
  node 3 free: 366812 MB
  node 4 cpus: 96-119,240-263
  node 4 size: 387058 MB
  node 4 free: 366825 MB
  node 5 cpus: 120-143,264-287
  node 5 size: 386977 MB
  node 5 free: 366710 MB
  node distances:
  node   0   1   2   3   4   5
    0:  10  15  17  21  28  26
    1:  15  10  15  23  26  23
    2:  17  15  10  26  23  21
    3:  21  28  26  10  15  17
    4:  23  26  23  15  10  15
    5:  26  23  21  17  15  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2377507268 kB

------------------------------------------------------------
10. who -r
  run-level 3 Dec 4 10:33

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
```

(Continued on next page)

Platform Notes (Continued)

```
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-fsck-root systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd munge nfs nfs-blkmap nmb rpcbind rpmconfigcheck rsyncd
                   salt-minion samba-bgqd serial-getty@ slurmd smartd_generate_opts smb snmpd snmptrapd
                   svnserve systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@ ypbind
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=400eec9d-a733-4b70-8005-d2acc084fac4
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 104:
    current policy: frequency should be within 800 MHz and 3.90 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /root/cpu2017-1.1.9
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 ext4  3.6T  159G  3.3T   5% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         PM_X11DPU-XLL
    Product:        PPM_X11DPUXLL1
    Product Family: SMC X14
    Serial:         PSX11DPUXLL1

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x Samsung MDRRWM4QDBC2-3B000 96 GB 2 rank 6400
    3x Samsung MDRRWM4QDBC2-3D000 96 GB 2 rank 6400
    6x Samsung MDRRWM4QDBC2-3E000 96 GB 2 rank 6400
    7x Samsung MDRRWM4QDBC2-3G000 96 GB 2 rank 6400
    7x Samsung MDRRWM4QDBC2-3L000 96 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.4
   BIOS Date:         07/15/2025
   BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1)
`-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse`
`-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int`
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast`
`-ffast-math -flto -mfpmath=sse -funroll-loops`
`-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs`
`-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revC.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-04 18:56:29-0500.
Report generated on 2026-01-14 13:46:00 by CPU2017 PS formatter v6716.
Originally published on 2026-01-13.