



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081


Test Date: Feb-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Jan-2026

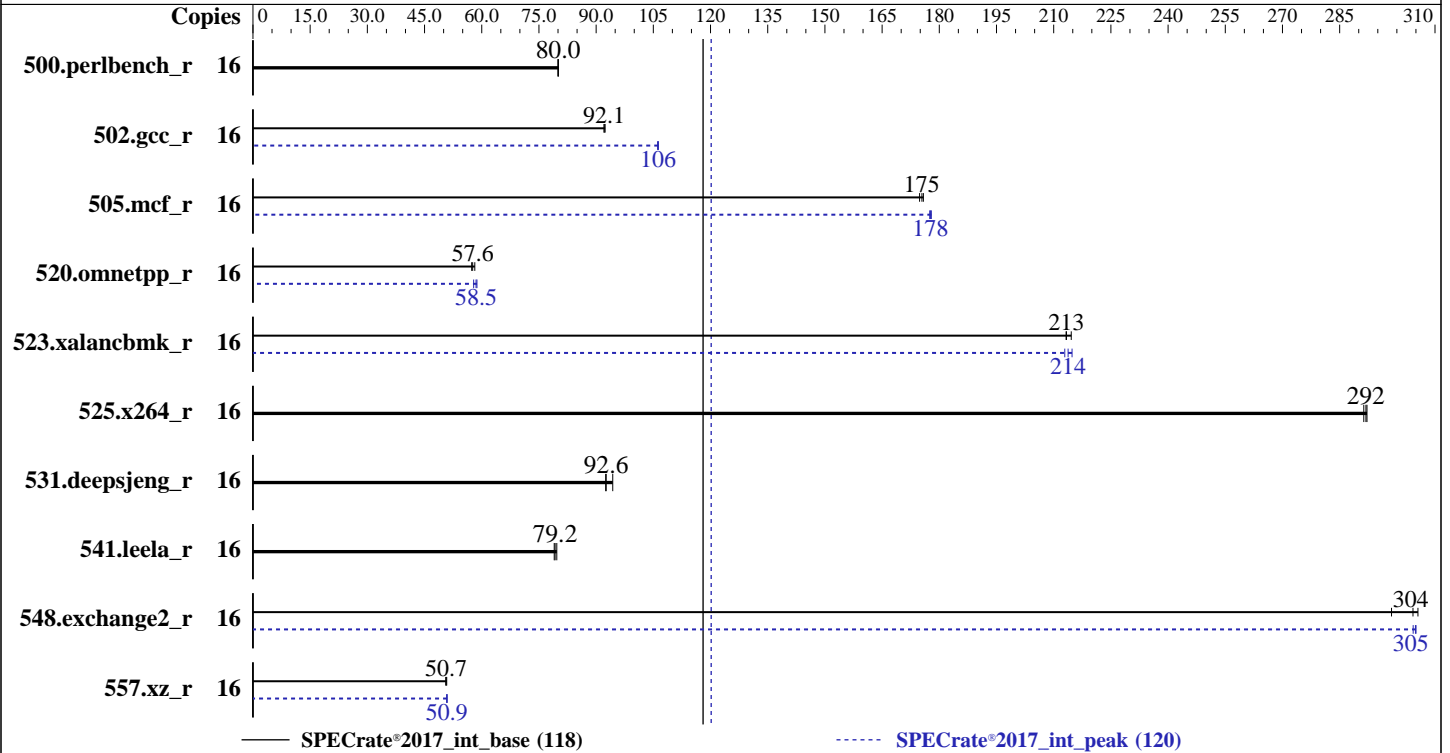

Hardware

CPU Name: AMD EPYC 9015
 Max MHz: 4100
 Nominal: 3600
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1.92 TB SATA III SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-100-generic x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: BIOS Version v3.04 released Nov-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Date: Feb-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	318	80.1	<u>318</u>	<u>80.0</u>	318	80.0	16	318	80.1	<u>318</u>	<u>80.0</u>	318	80.0
502.gcc_r	16	245	92.4	246	92.1	<u>246</u>	<u>92.1</u>	16	<u>213</u>	<u>106</u>	213	106	213	106
505.mcf_r	16	148	175	147	176	<u>147</u>	<u>175</u>	16	145	178	146	177	<u>145</u>	<u>178</u>
520.omnetpp_r	16	<u>364</u>	<u>57.6</u>	366	57.4	361	58.2	16	<u>359</u>	<u>58.5</u>	357	58.7	363	57.9
523.xalancbmk_r	16	78.7	215	79.2	213	<u>79.2</u>	<u>213</u>	16	79.4	213	78.7	215	<u>79.0</u>	<u>214</u>
525.x264_r	16	96.2	291	95.9	292	<u>96.0</u>	<u>292</u>	16	96.2	291	95.9	292	<u>96.0</u>	<u>292</u>
531.deepsjeng_r	16	198	92.5	194	94.4	<u>198</u>	<u>92.6</u>	16	198	92.5	194	94.4	<u>198</u>	<u>92.6</u>
541.leela_r	16	333	79.7	<u>334</u>	<u>79.2</u>	335	79.0	16	333	79.7	<u>334</u>	<u>79.2</u>	335	79.0
548.exchange2_r	16	140	299	<u>138</u>	<u>304</u>	137	306	16	<u>138</u>	<u>305</u>	138	304	137	305
557.xz_r	16	340	50.8	342	50.6	<u>341</u>	<u>50.7</u>	16	340	50.8	<u>340</u>	<u>50.9</u>	339	50.9

SPECrate®2017_int_base = 118

SPECrate®2017_int_peak = 120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage, 'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:always"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Bios settings:

```
SR-IOV Support = Enable
SVM Mode = Enable
NUMA nodes per socket = NPS2
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 155
PPT Control = Manual
PPT = 155
SMT Control = Enable
```

BMC Configuration:

```
Fan mode = Full speed mode
```

```
Sysinfo program /cpu2017-1.1.9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on sut Fri Feb 27 15:16:41 2026
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Date: Feb-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Jan-2026

Platform Notes (Continued)

```

10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux sut 6.8.0-100-generic #100-Ubuntu SMP PREEMPT_DYNAMIC Tue Jan 13 16:40:06 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux

```

```

-----
2. w
15:16:41 up 13 min, 3 users, load average: 0.09, 0.06, 0.01
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    10.0.0.7      15:14       13:26       0.00s     0.05s     sshd: root@pts/3
root      tty1    10.0.0.7      15:13       13:26       0.00s     0.06s     sshd: root@pts/0
root      tty1    -             15:12       9.00s       0.90s     0.05s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   unlimited
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189757
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0

```

```

-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Platform Notes (Continued)

\$SPEC = /cpu2017-1.1.9

6. /proc/cpuinfo

```

model name      : AMD EPYC 9015 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping      : 1
microcode     : 0xb002152
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size     : 192 4K pages
cpu cores     : 8
siblings      : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-3,8-11
physical id 0: apicids 0-7,16-23

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:  0-15
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9015 8-Core Processor
BIOS Model name:      AMD EPYC 9015 8-Core Processor           Unknown CPU @
                                                                3.6GHz
BIOS CPU family:      107
CPU family:           26
Model:                2
Thread(s) per core:  2
Core(s) per socket:  8
Socket(s):            1
Stepping:             1
Frequency boost:      enabled
CPU(s) scaling MHz:  89%
CPU max MHz:          4113.2808
CPU min MHz:          1500.0000
BogoMIPS:             7189.43
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                    pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                    nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                    monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                    xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
                    sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                    vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                    rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                    avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavec xgetbv1 xsaves

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Platform Notes (Continued)

```

cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
avx_vnni avx512_bf16 clzero irperf xsaveptr rdpru wbnoinvd
amd_ppin cpc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
avx512_vp2intersect flush_lld sev sev_es debug_swap

```

```

L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 8 MiB (8 instances)
L3 cache: 64 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	1M	8M	16	Unified	2	1024	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-3,8-11
node 0 size: 257567 MB
node 0 free: 256795 MB
node 1 cpus: 4-7,12-15
node 1 size: 257998 MB
node 1 free: 257521 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Platform Notes (Continued)

MemTotal: 527940216 kB

10. who -r
run-level 5 Feb 27 15:05

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
1 loaded units listed.

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor appport blk-availability console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald ufw unattended-upgrades
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables numad serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync tuned upower
generated openipmi
indirect systemd-sysupdate systemd-sysupdate-reboot
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-100-generic
root=UUID=40338855-ed28-479d-9fce-40874beafd7
ro

15. cpupower frequency-info
analyzing CPU 15:
current policy: frequency should be within 1.50 GHz and 3.60 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3600MHz

16. tuned-adm active

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Platform Notes (Continued)

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
-----

```

```

-----
21. Disk information
SPEC is set to: /cpu2017-1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  1.8T  145G  1.5T   9% /
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Platform Notes (Continued)

8x Samsung M321R8GA0PB2-CCPWF 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: V3.04 (0x11)
BIOS Date: 11/04/2025
BIOS Revision: 5.35
Firmware Revision: 5.1

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Date: Feb-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Jan-2026

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r:basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl
```

```
523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

531.deepsjeng_r:basepeak = yes

541.leela_r:basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 118

eterio 137 RT3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_int_peak = 120

CPU2017 License: 9081

Test Date: Feb-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Jan-2026

Peak Optimization Flags (Continued)

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-27 10:16:40-0500.

Report generated on 2026-03-25 10:08:00 by CPU2017 PDF formatter v6716.

Originally published on 2026-03-24.