



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

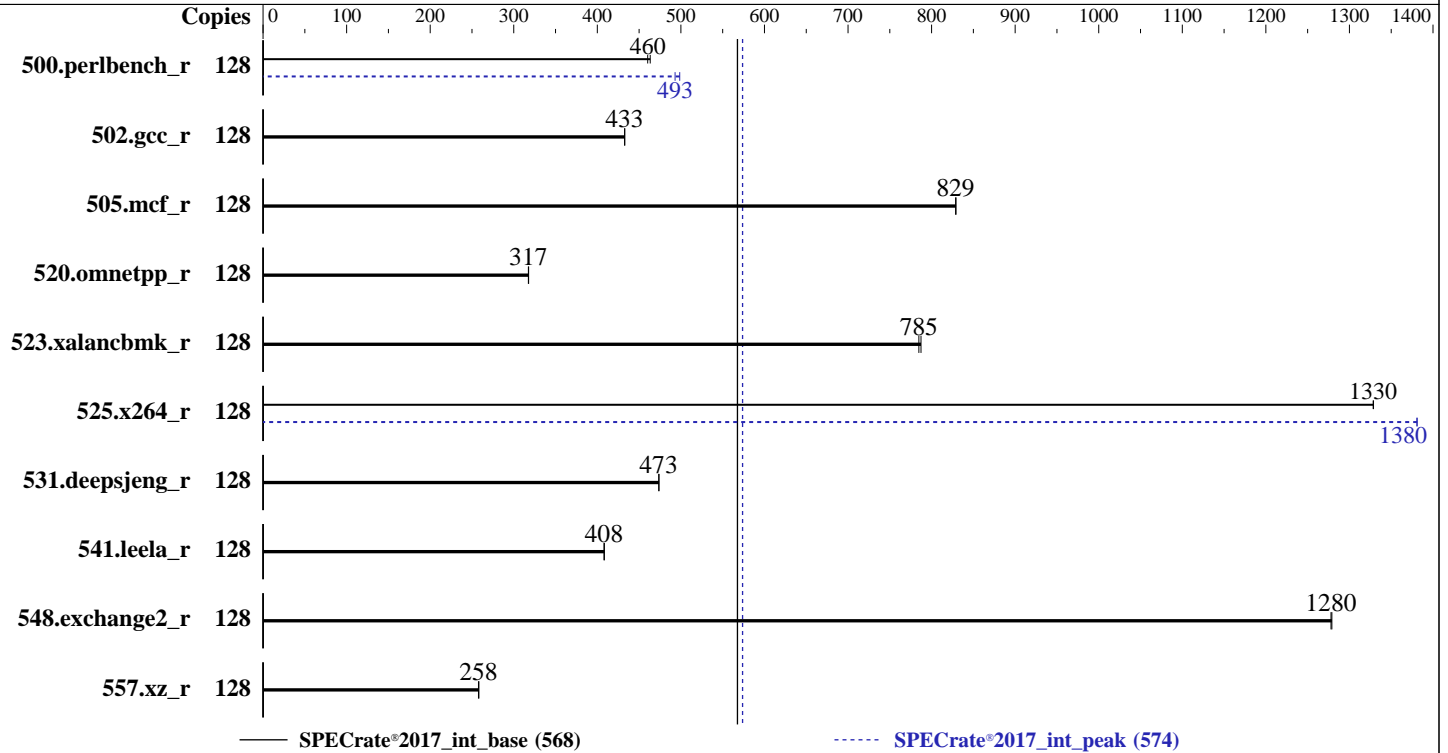

Hardware

CPU Name: Intel Xeon 6766P-B
 Max MHz: 3500
 Nominal: 2300
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 90 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 10.0 (Coughlan)
 6.12.0-55.9.1.el10_0.x86_64
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.2 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.1.3 released Feb-2026
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	440	463	443	460			128	409	499	413	493		
502.gcc_r	128	419	433	419	433			128	419	433	419	433		
505.mcf_r	128	250	829	249	829			128	250	829	249	829		
520.omnetpp_r	128	528	318	529	317			128	528	318	529	317		
523.xalancbmk_r	128	172	787	172	785			128	172	787	172	785		
525.x264_r	128	169	1330	169	1330			128	162	1380	162	1380		
531.deepsjeng_r	128	310	473	310	474			128	310	473	310	474		
541.leela_r	128	519	408	520	408			128	519	408	520	408		
548.exchange2_r	128	262	1280	262	1280			128	262	1280	262	1280		
557.xz_r	128	535	258	536	258			128	535	258	536	258		

SPECrate®2017_int_base = 568

SPECrate®2017_int_peak = 574

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Benchmark run from a 90 GB ramdisk created with the cmd: "mount -t tmpfs -o size=90G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled
AMP Prefetch : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLXR872-XR8720t Tue Mar 3 03:01:51 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux SLXR872-XR8720t 6.12.0-55.9.1.el10_0.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Mar 25 09:14:09 EDT 2025
x86_64 GNU/Linux
```

```
2. w
03:01:51 up 2 min, 1 user, load average: 0.56, 0.20, 0.07
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root                03:01   1:44   0.00s  0.26s /usr/lib/systemd/systemd --user
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size             (blocks, -c) unlimited
data seg size               (kbytes, -d) unlimited
scheduling priority        (-e) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

file size                (blocks, -f) unlimited
pending signals          (-i) 2059650
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2059650
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=47 rhgb
/usr/sbin/crond -n
/usr/sbin/CROND -n
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/CPU_rate.sh int
/bin/bash /home/DellFiles/bin/cpu-run-main.sh rate int
/bin/bash /home/DellFiles/bin/cpu-run-main.sh rate int
/bin/bash /home/DellFiles/bin/Intel/cpu-run-speccpu.sh rate_int --define DL-VERS=7.0_T06 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/cpu-run-speccpu.sh rate_int --define DL-VERS=7.0_T06 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=7.0_T06 --output_format html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-VERS=7.0_T06 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) 6766P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping      : 1
microcode     : 0x1000303
bugs          : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.40.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list:  0-127
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel
Model name:           INTEL(R) XEON(R) 6766P-B
BIOS Model name:     INTEL(R) XEON(R) 6766P-B  CPU @ 2.3GHz
BIOS CPU family:     179
CPU family:          6
Model:               174
Thread(s) per core:  2
Core(s) per socket:  64
Socket(s):           1
Stepping:            1
BogoMIPS:            4600.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                    ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                    vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                    rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                    intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts hfi vmmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                    gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                    rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                    amx_int8 flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:           3 MiB (64 instances)
L1i cache:           4 MiB (64 instances)
L2 cache:            128 MiB (64 instances)
L3 cache:            256 MiB (1 instance)
NUMA node(s):        2
NUMA node0 CPU(s):  0-31,64-95
NUMA node1 CPU(s):  32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRBSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	256M	256M	16	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 257160 MB
node 0 free: 242601 MB
node 1 cpus: 32-63,96-127
node 1 size: 257977 MB
node 1 free: 256763 MB
node distances:
node    0    1
  0:   10   12
  1:   12   10
```

9. /proc/meminfo

```
MemTotal:      527501052 kB
```

10. who -r

```
run-level 3 Mar 3 03:00
```

11. Systemd service manager version: systemd 257 (257-9.e110_0.1-g8cd5633)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd audit-rules auditd avahi-daemon bluetooth chronyd crond cups dbus-broker fips-crypto-policy-overlay firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lvm2-monitor mcelog mdmonitor multipathd nvme-fc-boot-connections qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-confext systemd-network-generator systemd-pstore systemd-sysextd tuned tuned-ppd udisks2 upower vgauthd vmttoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq gnome-remote-desktop gnome-remote-desktop-configuration hypervfscopd iscsi-init iscsid iscsiui0 kpatch kvm_stat ledmon low-memory-monitor lvm-devices-import man-db-restart-cache-update microcode netavark-dhcp-proxy netavark-firewalld-reload nftables nis-domainname nvmmf-autoconnect podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```

indirect
ras-mc-ctl rasdaemon rhsm rhsm-facts rpmdb-migrate rpmdb-rebuild
selinux-check-proper-disable serial-getty@ speech-dispatcherd ssh-host-keys-migration
sshd-keygen@ systemd-boot-check-no-failures systemd-boot-update
systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config
systemd-PCRlock-machine-id systemd-PCRlock-make-policy
systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy
systemd-udev-load-credentials wpa_supplicant wsdd yggdrasil yggdrasil@
iscsi pcsd spice-vdagentd sshd@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot systemd-userdbd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-6.12.0-55.9.1.el10_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=2G-64G:256M,64G-:512M
resume=UUID=eefe8659-8b69-47a2-9f71-b55ccafcac00
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 120:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: balanced

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 10.0 (Coughlan)
redhat-release Red Hat Enterprise Linux release 10.0 (Coughlan)
system-release Red Hat Enterprise Linux release 10.0 (Coughlan)

20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 90G 5.8G 85G 7% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge XR8720t
Product Family: PowerEdge
Serial: SLXR872

22. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x 002C069D002C MTC40F2046S1RC64BD2 USFF 64 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.3
BIOS Date: 02/03/2026
BIOS Revision: 1.1

Compiler Version Notes

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
         | 541.leela_r(base, peak)
=====

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

```

-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 568

PowerEdge XR8720t (Intel Xeon 6766P-B)

SPECrate®2017_int_peak = 574

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-fno-strict-overflow -fno-strict-aliasing
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmalloc

502.gcc_r: basepeak = yes

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-03 04:01:50-0500.

Report generated on 2026-03-25 10:08:00 by CPU2017 PDF formatter v6716.

Originally published on 2026-03-24.