



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Mar-2026

Software Availability: Jun-2025

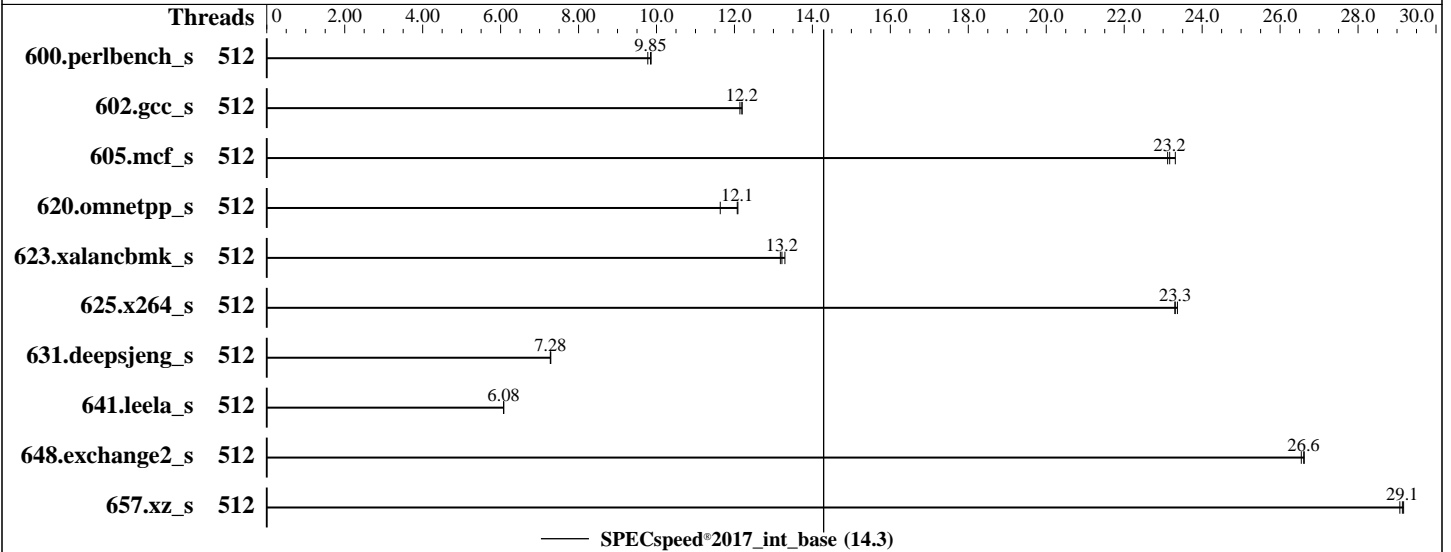

Hardware

CPU Name: Intel Xeon 6980P
 Max MHz: 3900
 Nominal: 2000
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 504 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)
 Storage: 1 x 1.92 TB NVME SSD
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version Q5E111J 1.20 released Nov-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2025
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	512	182	9.78	180	9.86	180	9.85									
602.gcc_s	512	328	12.1	327	12.2	327	12.2									
605.mcf_s	512	204	23.2	204	23.1	203	23.3									
620.omnetpp_s	512	135	12.1	140	11.6	135	12.1									
623.xalancbmk_s	512	107	13.3	108	13.2	107	13.2									
625.x264_s	512	75.7	23.3	75.5	23.4	75.7	23.3									
631.deepsjeng_s	512	197	7.28	197	7.28	197	7.29									
641.leela_s	512	281	6.08	281	6.08	281	6.07									
648.exchange2_s	512	111	26.5	110	26.6	111	26.6									
657.xz_s	512	212	29.1	213	29.1	212	29.2									

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom

C-States set to Legacy

SNC set to Enabled

Latency Optimized Mode set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Dec 10 19:59:37 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
19:59:37 up 3:18, 1 user, load average: 5.92, 7.84, 4.45
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 16:43 3:16m 0.83s 0.00s /bin/bash ./run_multi_speedfp.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2025
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

pending signals          (-i) 3093857
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093857
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./run_multi_speedfp.sh
/bin/bash ./run_multi_speedfp.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.209/templogs/preenv.intspeed.209.0.log --lognum 209.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6980P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000404
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 128
siblings      : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-42,64-106,128-169
physical id 1: core ids 0-42,64-106,128-169
physical id 0: apicids 0-85,128-213,256-339
physical id 1: apicids 512-597,640-725,768-851
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                512

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Platform Notes (Continued)

```

On-line CPU(s) list:          0-511
Vendor ID:                   GenuineIntel
Model name:                   Intel(R) Xeon(R) 6980P
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          128
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     4000.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt clwb
                             intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                             xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts vmmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                             rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   12 MiB (256 instances)
L1i cache:                   16 MiB (256 instances)
L2 cache:                     512 MiB (256 instances)
L3 cache:                     1008 MiB (2 instances)
NUMA node(s):                6
NUMA node0 CPU(s):           0-42,256-298
NUMA node1 CPU(s):           43-85,299-341
NUMA node2 CPU(s):           86-127,342-383
NUMA node3 CPU(s):           128-170,384-426
NUMA node4 CPU(s):           171-213,427-469
NUMA node5 CPU(s):           214-255,470-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL   SETS PHY-LINE COHERENCY-SIZE
L1d      48K      12M      12 Data      1       64       1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

L1i	64K	16M	16 Instruction	1	64	1	64
L2	2M	512M	16 Unified	2	2048	1	64
L3	504M	1008M	16 Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 6 nodes (0-5)
node 0 cpus: 0-42,256-298
node 0 size: 128673 MB
node 0 free: 128143 MB
node 1 cpus: 43-85,299-341
node 1 size: 129001 MB
node 1 free: 128483 MB
node 2 cpus: 86-127,342-383
node 2 size: 129001 MB
node 2 free: 128659 MB
node 3 cpus: 128-170,384-426
node 3 size: 129001 MB
node 3 free: 127583 MB
node 4 cpus: 171-213,427-469
node 4 size: 128962 MB
node 4 free: 128579 MB
node 5 cpus: 214-255,470-511
node 5 size: 128850 MB
node 5 free: 128562 MB
node distances:
node  0  1  2  3  4  5
 0:  10  15  17  26  23  26
 1:  15  10  15  23  26  23
 2:  17  15  10  26  28  21
 3:  26  23  26  10  15  17
 4:  23  26  23  15  10  15
 5:  26  28  21  17  15  10

```

9. /proc/meminfo

MemTotal: 792055156 kB

10. who -r

run-level 3 Dec 10 16:42

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
vncserver@
systemd-userdbd wickedd
```

indirect

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=ce1519fb-457a-4b1f-ab59-fcfcc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 40:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2025
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.8T 49G 1.7T 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: Lenovo ThinkSystem SC750 V4 Neptune Tray
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
7x SK Hynix HMC88BDJHA380N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA383N 32 GB 2 rank 8800
9x SK Hynix HMC88BDJHA462N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA464N 32 GB 2 rank 8800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: Q5E111J-1.20
BIOS Date: 11/17/2025
BIOS Revision: 1.20
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-J.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-J.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-10 06:59:37-0500.

Report generated on 2026-04-16 11:35:33 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-15.