



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412


Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Mar-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

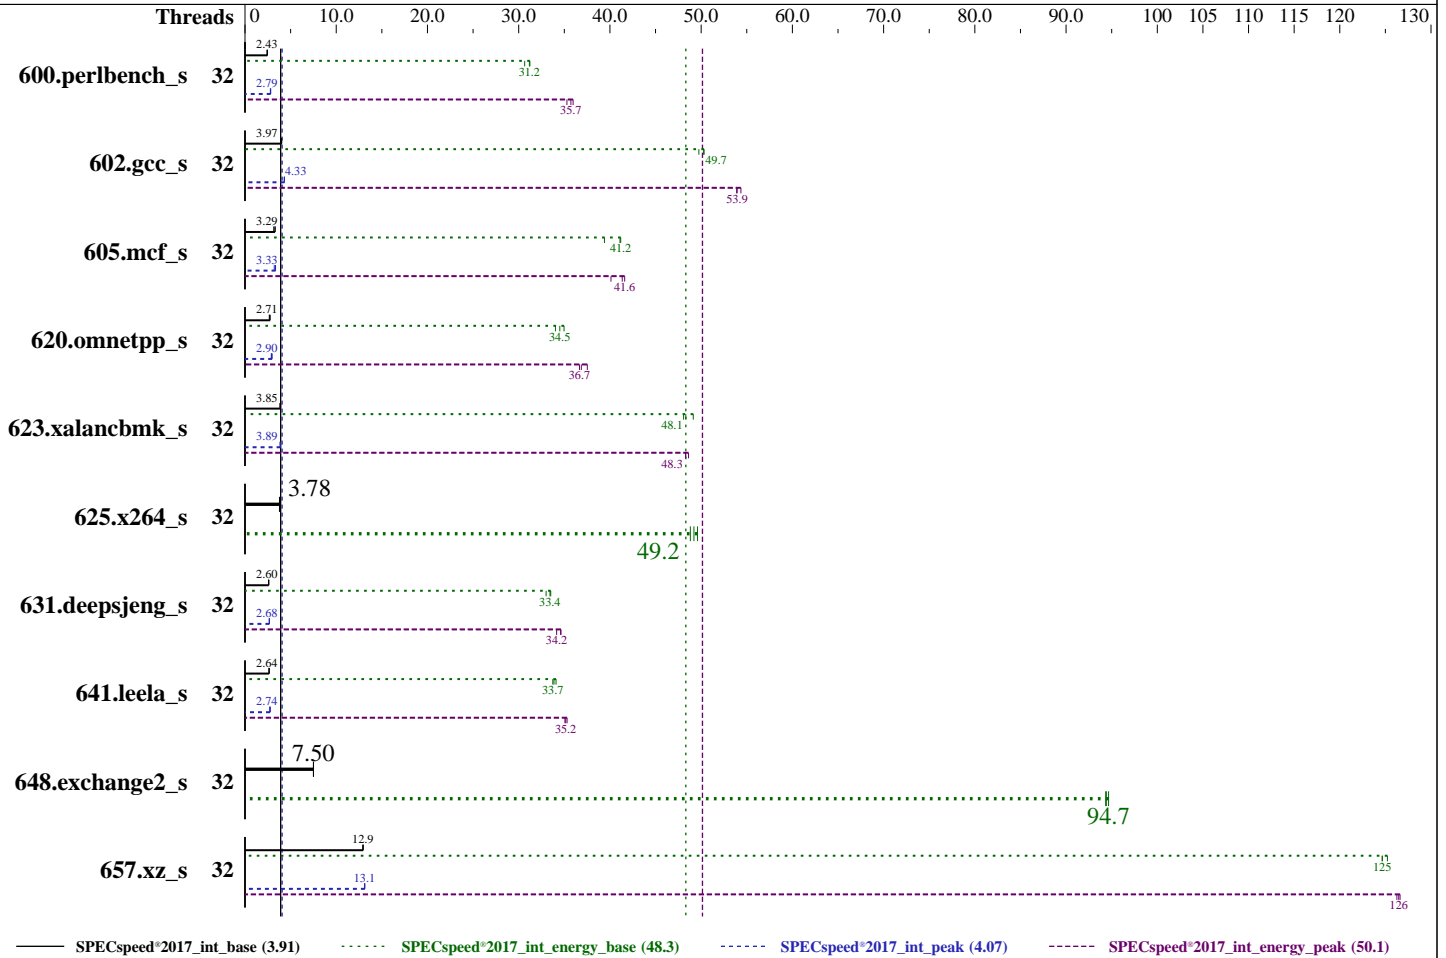

Hardware

CPU Name: Ampere eMAG 8180
 Max MHz: 3300
 Nominal: 3000
 Enabled: 32 cores, 1 chip
 Orderable: 1 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per chip (256 KiB shared / 2 cores)
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
 Compiler: C/C++/Fortran: Version 15.2.0 of GCC
 Parallel: Yes
 Firmware: Version 1.12 released Nov-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc v5.3+, commit hash 1972241
 Power Management: OS CPU governor set to "performance"



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Power

Max. Power (W): 187.74
Idle Power (W): 77.53
Min. Temperature (C): 21.06
Elevation (m): 60
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire
Provisioning: Line powered

Power Settings

Management FW: Version 11.05.111 of Falcon BMC
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane: N/A
Other Storage: N/A
Storage Model #: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gbps
Other HW Model #: --

Power Analyzer

Power Analyzer: cpu-reference-ptd:8000
Hardware Vendor: Yokogawa
Model: YokogawaWT310E
Serial Number: T11733385
Input Connection: Serial over USB
Metrology Institute: NIST
Calibration By: Yokogawa USA
Calibration Label: T126622
Calibration Date: 18-Aug-2025
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: Directly connected
Current Ranges Used: 5A
Voltage Range Used: 150V

Temperature Meter

Temperature Meter: cpu-reference-ptd:9000
Hardware Vendor: PCSensor
Model: USB9097+DS18B20
Serial Number: --
Input Connection: USB
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: In front of SUT front panel primary air inlet

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	32	729	2.43	61.8	31.2	84.7	88.6	723	2.45	61.7	31.2	85.3	87.8	731	2.43	62.8	30.7	85.9	88.0
602.gcc_s	32	1003	3.97	87.0	49.7	86.8	92.2	988	4.03	86.1	50.3	87.1	92.2	1006	3.96	86.0	50.3	85.5	90.0
605.mcf_s	32	1498	3.15	131	39.4	87.3	91.9	1434	3.29	125	41.2	87.2	92.3	1432	3.30	125	41.1	87.5	93.3
620.omnetpp_s	32	613	2.66	52.1	34.0	85.1	87.8	593	2.75	50.7	35.0	85.6	87.4	601	2.71	51.4	34.5	85.5	88.4
623.xalancbmk_s	32	363	3.91	31.3	49.1	86.3	90.6	369	3.84	31.8	48.3	86.4	90.0	368	3.85	32.0	48.1	87.0	90.5
625.x264_s	32	463	3.81	38.7	49.6	83.5	85.9	467	3.78	39.3	48.8	84.2	87.2	466	3.78	39.0	49.2	83.6	86.3
631.deepsjeng_s	32	551	2.60	46.5	33.5	84.4	93.9	554	2.58	47.2	33.0	85.1	94.5	551	2.60	46.6	33.4	84.5	92.9
641.leela_s	32	646	2.64	54.2	34.1	83.9	86.6	646	2.64	54.8	33.7	84.8	88.0	645	2.64	54.6	33.9	84.5	87.0
648.exchange2_s	32	392	7.50	33.9	94.4	86.5	88.9	392	7.51	33.9	94.3	86.6	88.8	392	7.50	33.8	94.7	86.2	87.6
657.xz_s	32	478	12.9	54.0	125	113	187	477	13.0	53.8	125	113	187	478	12.9	54.0	125	113	187

SPECspeed®2017_int_base = 3.91

SPECspeed®2017_int_energy_base = 48.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_int_base = 3.91
SPECSpeed®2017_int_energy_base = 48.3
SPECSpeed®2017_int_peak = 4.07
SPECSpeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	32	638	2.78	54.6	35.3	85.6	87.6	629	2.82	53.5	36.0	85.1	88.5	636	2.79	53.9	35.7	84.8	87.8
602.gcc_s	32	920	4.33	80.2	53.9	87.2	92.3	920	4.33	79.6	54.4	86.5	91.7	927	4.30	80.3	53.9	86.7	92.4
605.mcf_s	32	1410	3.35	125	41.3	88.4	93.4	1472	3.21	128	40.1	87.2	97.0	1416	3.33	124	41.6	87.4	97.1
620.omnetpp_s	32	562	2.90	48.4	36.7	86.1	87.9	566	2.88	48.1	36.9	85.1	88.3	548	2.98	47.3	37.5	86.3	96.7
623.xalancbmk_s	32	370	3.83	31.9	48.3	86.2	89.3	364	3.89	31.9	48.3	87.5	91.0	363	3.90	31.7	48.6	87.1	89.9
625.x264_s	32	463	3.81	38.7	49.6	83.5	85.9	467	3.78	39.3	48.8	84.2	87.2	466	3.78	39.0	49.2	83.6	86.3
631.deepsjeng_s	32	535	2.68	45.6	34.2	85.2	90.7	535	2.68	45.0	34.6	84.1	92.5	540	2.65	45.0	34.6	83.3	89.0
641.leela_s	32	622	2.74	52.7	35.1	84.7	87.3	623	2.74	52.6	35.2	84.4	86.5	623	2.74	52.3	35.3	83.9	86.9
648.exchange2_s	32	392	7.50	33.9	94.4	86.5	88.9	392	7.51	33.9	94.3	86.6	88.8	392	7.50	33.8	94.7	86.2	87.6
657.xz_s	32	472	13.1	53.2	126	113	187	472	13.1	53.3	126	113	188	470	13.1	53.2	127	113	187

SPECSpeed®2017_int_peak = 4.07

SPECSpeed®2017_int_energy_peak = 50.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64/:/usr/lib/:/lib64:/home/mjm/jemalloc/lib"

General Notes

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support. sources available from <https://github.com/facebook/jemalloc/tree/1972241> and built via `./configure --with-lg-quantum=3` which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

Sysinfo program /home/mjm/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on emag Tue Mar 3 17:45:24 2026

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_int_base = 3.91
SPECSpeed®2017_int_energy_base = 48.3
SPECSpeed®2017_int_peak = 4.07
SPECSpeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent_hugepage
- 16. /sys/kernel/mm/transparent_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
1. uname -a
Linux emag 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux
```

```
2. w
17:45:24 up 74 days, 18:10, 2 users, load average: 1.18, 12.19, 23.29
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
mjm 10.13.114.186 28Jan26 3days 0.00s 0.02s sshd: mjm [priv]
```

```
3. Username
From environment variable $USER: mjm
```

```
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 16691648
process 128681
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --system --deserialize=66
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_int_base = 3.91
SPECSpeed®2017_int_energy_base = 48.3
SPECSpeed®2017_int_peak = 4.07
SPECSpeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

SCREEN

```
-bin/tcsh
runcpu --flagsurl=$SPEC/gcc.2024-08-14.xml --reportable -c emag-Ofast-gcc15 --tune=base,peak -n 3 --threads
32 intspeer
runcpu --flagsurl $SPEC/gcc.2024-08-14.xml --reportable --configfile emag-Ofast-gcc15 --tune base,peak
--iterations 3 --threads 32 --runmode speed --tune base:peak --size refspeer intspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.097/templogs/preenv.intspeed.097.0.log --lognum 097.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/cpu2017
```

```
-----
6. /proc/cpuinfo
CPU implementer : 0x50
CPU architecture: 8
CPU variant : 0x3
CPU part : 0x000
CPU revision : 2
Features : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
```

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture: aarch64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: APM
Model name: -
Model: 2
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 1
Stepping: 0x3
Frequency boost: disabled
CPU(s) scaling MHz: 100%
CPU max MHz: 2911.7639
CPU min MHz: 363.9700
BogoMIPS: 80.00
Flags: fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 4 MiB (16 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Mitigation; PTI
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Mitigation; __user pointer sanitization
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Vulnerability Spectre v2: Vulnerable
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1			
L1i	32K	1M	8	Instruction	1			
L2	256K	4M	32	Unified	2			

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 77282 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Dec 18 23:35

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
enabled-runtime	
disabled	console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysextr systemd-time-wait-sync
generated	openipmi perlbald
indirect	serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

```
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
ro
cma=1024M
iommu.passthrough=1
```

```
-----
14. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size 536870912
shmem_enabled  always within_size advise [never] deny force
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          8191
max_ptes_shared        4096
max_ptes_swap          1024
pages_to_scan          65536
scan_sleep_millisecs  10000
```

```
-----
17. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

```
-----
18. Disk information
SPEC is set to: /home/mjm/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G  309G  108G  75% /
```

```
-----
19. /sys/devices/virtual/dmi/id
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Vendor: Lenovo
Product: HR330A 7X33CTO1WW
Product Family: Lenovo ThinkSystem HR330A/HR350A

20. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: LENOVO
BIOS Version: HVE104N-1.12
BIOS Date: 11/29/2019
BIOS Revision: 1.12
Firmware Revision: 1.7

Power Settings Notes

OS CPU governor was set using the command:
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Fortran | 648.exchange2_s(base, peak)

GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Compiler Version Notes (Continued)

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_AARCH64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-mabi=lp64 -std=c99 -g -Ofast -mcpu=native -flto=16
-fno-strict-aliasing -fno-unsafe-math-optimizations
-fno-finite-math-only -fgnu89-inline -fopenmp -DSPEC_OPENMP
-L/home/mjm/jemalloc/lib -ljemalloc

C++ benchmarks:

-mabi=lp64 -std=c++03 -g -Ofast -mcpu=native -flto=16 -fopenmp
-DSPEC_OPENMP -L/home/mjm/jemalloc/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Base Optimization Flags (Continued)

Fortran benchmarks:
-mabi=lp64 -g -Ofast -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp
-L/home/mjm/jemalloc/lib -ljemalloc

Base Other Flags

C benchmarks:
-fcommon

C++ benchmarks:
-Wno-error=template-body

Peak Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

Fortran benchmarks:
gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only
-fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-ljemalloc

602.gcc_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-fgnu89-inline -fopenmp -DSPEC_OPENMP
-L/home/mjm/jemalloc/lib -ljemalloc

605.mcf_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

625.x264_s: basepeak = yes

657.xz_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP
-L/home/mjm/jemalloc/lib -ljemalloc

C++ benchmarks:
-mabi=lp64 -std=c++03 -fprofile-generate -fprofile-use -g -Ofast
-mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

625.x264_s: -fcommon

C++ benchmarks:

623.xalancbmk_s: -Wno-error=template-body



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_int_base = 3.91
SPECspeed®2017_int_energy_base = 48.3
SPECspeed®2017_int_peak = 4.07
SPECspeed®2017_int_energy_peak = 50.1

CPU2017 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Mar-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-03 12:45:22-0500.

Report generated on 2026-04-28 13:16:50 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-28.