



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo


SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

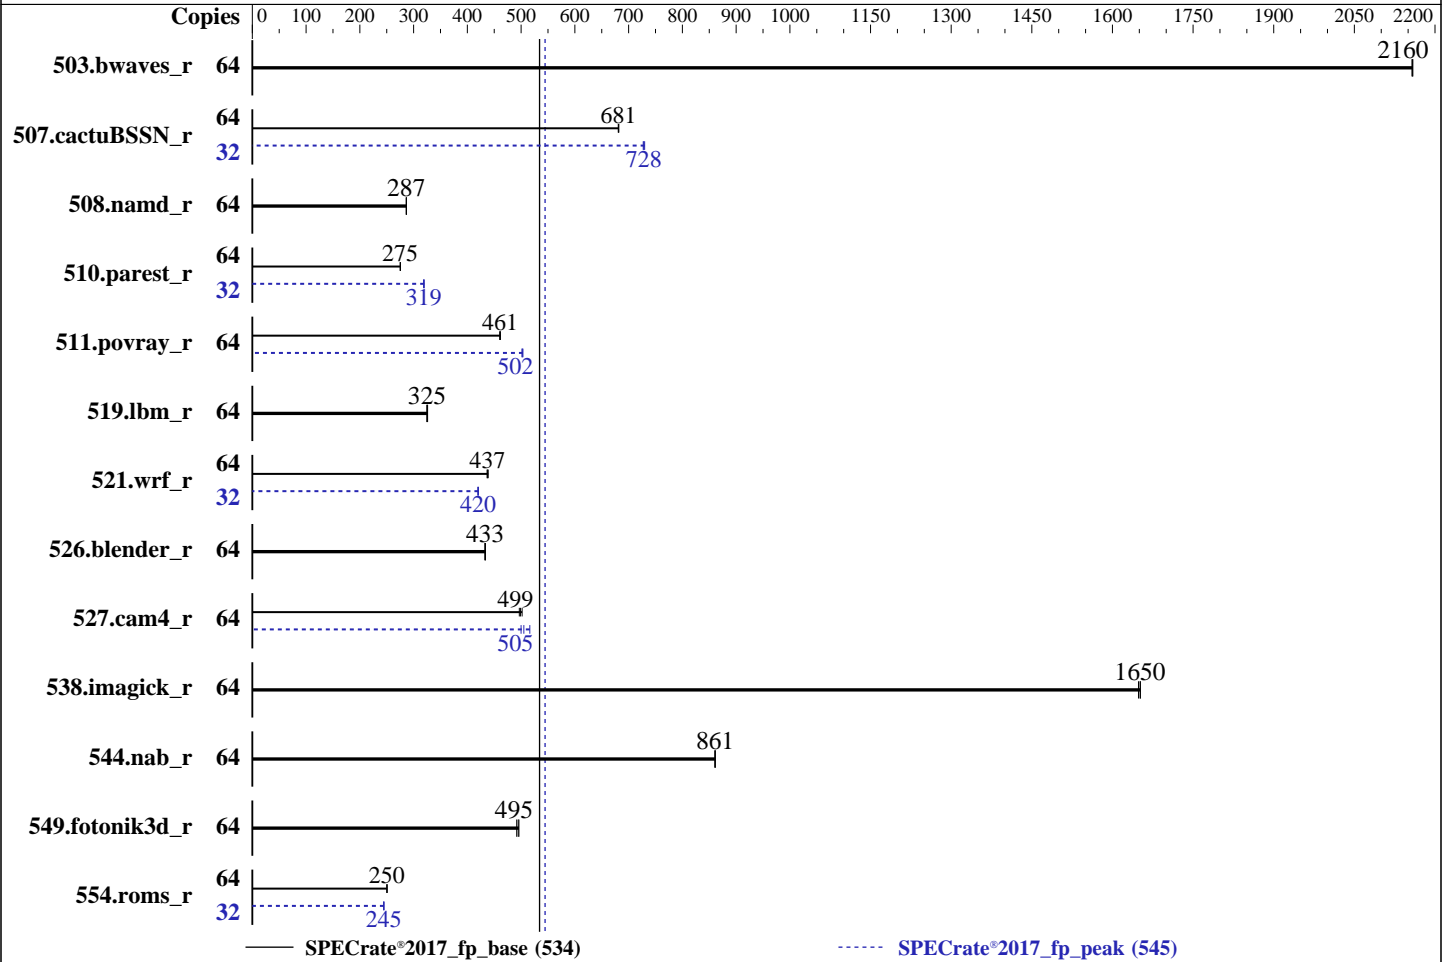

Hardware

CPU Name: Intel Xeon 6515P
Max MHz: 3800
Nominal: 2300
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 72 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 7.00.24 released Jan-2026 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	298	2160	<u>297</u>	<u>2160</u>	297	2160	64	298	2160	<u>297</u>	<u>2160</u>	297	2160
507.cactuBSSN_r	64	<u>119</u>	<u>681</u>	119	682	119	681	32	<u>55.6</u>	<u>728</u>	55.7	727	55.5	730
508.namd_r	64	212	286	<u>212</u>	<u>287</u>	212	287	64	212	286	<u>212</u>	<u>287</u>	212	287
510.parest_r	64	608	275	<u>608</u>	<u>275</u>	608	275	32	262	320	<u>262</u>	<u>319</u>	263	319
511.povray_r	64	325	460	324	461	<u>324</u>	<u>461</u>	64	297	503	298	502	<u>298</u>	<u>502</u>
519.lbm_r	64	208	325	<u>208</u>	<u>325</u>	207	326	64	208	325	<u>208</u>	<u>325</u>	207	326
521.wrf_r	64	328	437	327	439	<u>328</u>	<u>437</u>	32	171	420	<u>171</u>	<u>420</u>	170	421
526.blender_r	64	<u>225</u>	<u>433</u>	225	433	225	434	64	<u>225</u>	<u>433</u>	225	433	225	434
527.cam4_r	64	223	502	<u>224</u>	<u>499</u>	225	497	64	217	516	224	500	<u>222</u>	<u>505</u>
538.imagick_r	64	96.6	1650	96.3	1650	<u>96.4</u>	<u>1650</u>	64	96.6	1650	96.3	1650	<u>96.4</u>	<u>1650</u>
544.nab_r	64	125	860	<u>125</u>	<u>861</u>	125	861	64	125	860	<u>125</u>	<u>861</u>	125	861
549.fotonik3d_r	64	507	492	503	496	<u>504</u>	<u>495</u>	64	507	492	503	496	<u>504</u>	<u>495</u>
554.roms_r	64	406	251	<u>406</u>	<u>250</u>	406	250	32	208	244	208	245	<u>208</u>	<u>245</u>

SPECrate®2017_fp_base = **534**

SPECrate®2017_fp_peak = **545**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable
LLC Prefetch = Enabled
ACPI C6x Enumeration = C6 as ACPI C2
Latency Optimized Mode = Enable

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Mar 7 18:38:03 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
 - 2. w
 - 3. Username
 - 4. ulimit -a
 - 5. sysinfo process ancestry
 - 6. /proc/cpuinfo
 - 7. lscpu
 - 8. numactl --hardware
 - 9. /proc/meminfo
 - 10. who -r
 - 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 - 12. Services, from systemctl list-unit-files
 - 13. Linux kernel boot-time arguments, from /proc/cmdline
 - 14. cpupower frequency-info
 - 15. tuned-adm active
 - 16. sysctl
 - 17. /sys/kernel/mm/transparent_hugepage
 - 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 - 19. OS release
 - 20. Disk information
 - 21. /sys/devices/virtual/dmi/id
 - 22. dmidecode
 - 23. BIOS
-
- 1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
 - 2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Platform Notes (Continued)

18:38:03 up 1 day, 54 min, 1 user, load average: 36.39, 56.96, 61.24

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	Fri17	4:41m	0.84s	0.01s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2062110
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2062110
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.331/templogs/preenv.fprate.331.0.log --lognum 331.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6515P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode     : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 16
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: apicids 128-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6515P
BIOS Model name:             Intel(R) Xeon(R) 6515P UNKNOWN CPU @ 2.3GHz
BIOS CPU family:             179
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
Stepping:                     1
CPU(s) scaling MHz:          40%
CPU max MHz:                  3800.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4600.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                               rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                               clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                               xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnni avx512vbmi
                               umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                               avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                               cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                               pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                               arch_capabilities
Virtualization:              VT-x
L1d cache:                   1.5 MiB (32 instances)
L1i cache:                   2 MiB (32 instances)
L2 cache:                    64 MiB (32 instances)
L3 cache:                    144 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):           0-15,32-47
NUMA node1 CPU(s):           16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	64K	2M	16	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	72M	144M	16	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257576 MB
node 0 free: 238262 MB
node 1 cpus: 16-31,48-63
node 1 size: 257976 MB
node 1 free: 241301 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 527925968 kB

10. who -r

run-level 3 Mar 6 17:44

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels rollback smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fancontrol firewalld grub2-once haveged issue-add-ssh-keys kexec-load lm_sensors lunmask rpmconfigcheck serial-getty@ smartd_generate_opts sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd tuned

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Platform Notes (Continued)

indirect systemd-userdbd wickedd

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=287cccce-a705-4048-89d9-10107c0283b3
splash=silent
resume=/dev/disk/by-uuid/48e58092-2d5c-481f-adc6-5553a102ed9a
mitigations=auto
quiet
security=apparmor
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 45:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 854G 399G 455G 47% /home

21. /sys/devices/virtual/dmi/id
Vendor: Positivo
Product: Inteliserver R2000 G10
Product Family: Rack
Serial: 12356454325677

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Hynix HMC88AHBRA290N 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.00.24
BIOS Date: 01/30/2026
BIOS Revision: 5.35
Firmware Revision: 2.8

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Compiler Version Notes (Continued)

```

=====
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECrate®2017_fp_base = 534

Inteliserver R2000 G10 (Intel Xeon 6515P)

SPECrate®2017_fp_peak = 545

CPU2017 License: 7114
Test Sponsor: Positivo
Tested by: Positivo

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2024

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>
<http://www.spec.org/cpu2017/flags/Positivo-Platform-Settings-GNR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/Positivo-Platform-Settings-GNR-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-07 05:38:03-0500.
Report generated on 2026-06-02 13:49:45 by CPU2017 PDF formatter v6716.
Originally published on 2026-06-02.