SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3250
(2.00 GHz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 445

SPECspeed®2017_fp_peak = 445

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

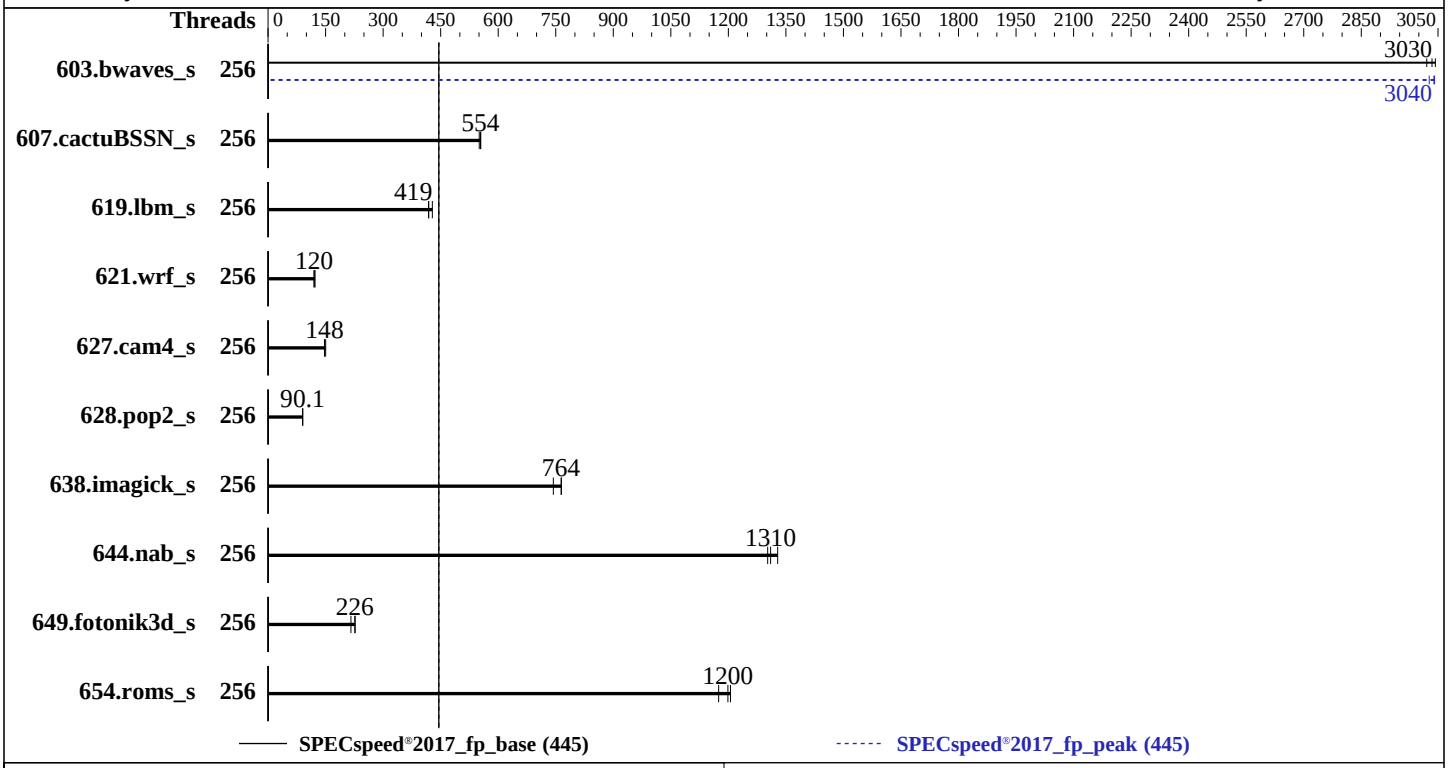

Hardware

CPU Name:	Intel Xeon 6788P
Max MHz:	3800
Nominal:	2000
Enabled:	1032 cores, 12 chips
Orderable:	4, 8, 12, 16 chip(s)
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	6 TB (96 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 1.5 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.53.31-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	HPE Firmware Bundle Version 1.0.308 01/21/2026 released Jan-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	256	19.5	3020	19.4	3040	**19.4**	**3030**	256	**19.4**	**3040**	19.4	3040	19.5	3030
607.cactuBSSN_s	256	30.3	551	30.1	555	**30.1**	**554**	256	30.3	551	30.1	555	**30.1**	**554**
619.lbm_s	256	12.5	418	**12.5**	**419**	12.2	428	256	12.5	418	**12.5**	**419**	12.2	428
621.wrf_s	256	108	123	110	120	**110**	**120**	256	108	123	110	120	**110**	**120**
627.cam4_s	256	59.0	150	**60.1**	**148**	60.3	147	256	59.0	150	**60.1**	**148**	60.3	147
628.pop2_s	256	132	90.0	**132**	**90.1**	131	90.4	256	132	90.0	**132**	**90.1**	131	90.4
638.imagick_s	256	19.4	744	18.9	765	**18.9**	**764**	256	19.4	744	18.9	765	**18.9**	**764**
644.nab_s	256	**13.3**	**1310**	13.2	1330	13.4	1300	256	**13.3**	**1310**	13.2	1330	13.4	1300
649.fotonik3d_s	256	**40.3**	**226**	42.2	216	40.1	227	256	**40.3**	**226**	42.2	216	40.1	227
654.roms_s	256	13.4	1170	**13.1**	**1200**	13.1	1210	256	13.4	1170	**13.1**	**1200**	13.1	1210

SPECspeed®2017_fp_base = 445

SPECspeed®2017_fp_peak = 445

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
Workload Profile set to HPC
 Workload Profile set to Custom
```

(Continued on next page)

Platform Notes (Continued)

```
 Power Regulator set to OS Control
 Energy Efficient Turbo set to Disabled
 Energy/Performance Bias set to Maximum Performance
 Intel Hyper-Threading set to Disabled
 Adjacent Sector Prefetch set to Disabled
 LLC Prefetch set to Enabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Memory Patrol Scrubbing set to Disabled
 Advanced Memory Protection set to Advanced ECC Support
 SR-IOV set to Disabled
 Intel Virtualization Technology (Intel VT, VT-x) set to Disabled
 Dynamic Prefetch Throttling set to Disabled
 Enabled Cores per Processor set to 64
 Page Policy set to Open Adaptive
 Sub-NUMA Clustering set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on gnh-108 Sun Mar  1 17:13:06 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.179.g75eab961ea)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux gnh-108 6.4.0-150700.53.31-default #1 SMP PREEMPT_DYNAMIC Tue Feb  3 14:18:17 UTC 2026 (73f3a11)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:13:06 up  3:28,  2 users,  load average: 150.59, 204.83, 218.79
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
  test     ttyS0    -                13:48    3:16m  0.18s  0.02s login -- test
  test     pts/0    -                13:48    3:16m  1.01s  0.16s sudo su

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 24378831
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 40000
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 24378831
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=39
 login -- test
 -bash
 sudo su
 sudo su
 su
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2025.2-linux64-core-avx2-speed-20250605.cfg --define cores=256 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2025.2-linux64-core-avx2-speed-20250605.cfg --define cores=256 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.016/templogs/preenv.fpspeed.016.0.log --lognum 016.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6788P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
    cpu cores       : 64
    siblings        : 64
    12 physical ids (chips)
```

(Continued on next page)

Platform Notes (Continued)

```
768 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95
physical id 2: core ids 0-31,64-95
physical id 3: core ids 0-31,64-95
physical id 4: core ids 0-31,64-95
physical id 5: core ids 0-31,64-95
physical id 6: core ids 0-31,64-95
physical id 7: core ids 0-31,64-95
physical id 8: core ids 0-31,64-95
physical id 9: core ids 0-31,64-95
physical id 10: core ids 0-31,64-95
physical id 11: core ids 0-31,64-95
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,128,130,132,13
4,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186
,188,190
physical id 1: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,42
4,426,428,430,432,434,436,438,440,442,444,446
physical id 2: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,68
0,682,684,686,688,690,692,694,696,698,700,702
physical id 3: apicids
768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
20,822,824,826,828,830,896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,93
6,938,940,942,944,946,948,950,952,954,956,958
physical id 4: apicids
1024,1026,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1152,1154,1156,1158,1160,1162,1164,1166,1168,1170,
1172,1174,1176,1178,1180,1182,1184,1186,1188,1190,1192,1194,1196,1198,1200,1202,1204,1206,1208,1210,1212,
1214
physical id 5: apicids
1280,1282,1284,1286,1288,1290,1292,1294,1296,1298,1300,1302,1304,1306,1308,1310,1312,1314,1316,1318,1320,
1322,1324,1326,1328,1330,1332,1334,1336,1338,1340,1342,1408,1410,1412,1414,1416,1418,1420,1422,1424,1426,
1428,1430,1432,1434,1436,1438,1440,1442,1444,1446,1448,1450,1452,1454,1456,1458,1460,1462,1464,1466,1468,
1470
physical id 6: apicids
1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,1562,1564,1566,1568,1570,1572,1574,1576,
1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,
1684,1686,1688,1690,1692,1694,1696,1698,1700,1702,1704,1706,1708,1710,1712,1714,1716,1718,1720,1722,1724,
1726
physical id 7: apicids
1792,1794,1796,1798,1800,1802,1804,1806,1808,1810,1812,1814,1816,1818,1820,1822,1824,1826,1828,1830,1832,
1834,1836,1838,1840,1842,1844,1846,1848,1850,1852,1854,1920,1922,1924,1926,1928,1930,1932,1934,1936,1938,
1940,1942,1944,1946,1948,1950,1952,1954,1956,1958,1960,1962,1964,1966,1968,1970,1972,1974,1976,1978,1980,
1982
physical id 8: apicids
2048,2050,2052,2054,2056,2058,2060,2062,2064,2066,2068,2070,2072,2074,2076,2078,2080,2082,2084,2086,2088,
2090,2092,2094,2096,2098,2100,2102,2104,2106,2108,2110,2176,2178,2180,2182,2184,2186,2188,2190,2192,2194,
2196,2198,2200,2202,2204,2206,2208,2210,2212,2214,2216,2218,2220,2222,2224,2226,2228,2230,2232,2234,2236,
2238
physical id 9: apicids
2304,2306,2308,2310,2312,2314,2316,2318,2320,2322,2324,2326,2328,2330,2332,2334,2336,2338,2340,2342,2344,
2346,2348,2350,2352,2354,2356,2358,2360,2362,2364,2366,2432,2434,2436,2438,2440,2442,2444,2446,2448,2450,
2452,2454,2456,2458,2460,2462,2464,2466,2468,2470,2472,2474,2476,2478,2480,2482,2484,2486,2488,2490,2492,
2494
physical id 10: apicids
```

(Continued on next page)

Platform Notes (Continued)

```
     2560,2562,2564,2566,2568,2570,2572,2574,2576,2578,2580,2582,2584,2586,2588,2590,2592,2594,2596,2598,2600,
     2602,2604,2606,2608,2610,2612,2614,2616,2618,2620,2622,2688,2690,2692,2694,2696,2698,2700,2702,2704,2706,
     2708,2710,2712,2714,2716,2718,2720,2722,2724,2726,2728,2730,2732,2734,2736,2738,2740,2742,2744,2746,2748,
     2750
     physical id 11: apicids
     2816,2818,2820,2822,2824,2826,2828,2830,2832,2834,2836,2838,2840,2842,2844,2846,2848,2850,2852,2854,2856,
     2858,2860,2862,2864,2866,2868,2870,2872,2874,2876,2878,2944,2946,2948,2950,2952,2954,2956,2958,2960,2962,
     2964,2966,2968,2970,2972,2974,2976,2978,2980,2982,2984,2986,2988,2990,2992,2994,2996,2998,3000,3002,3004,
     3006
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               768
   On-line CPU(s) list:                  0-767
   Vendor ID:                            GenuineIntel
   Model name:                           Intel(R) Xeon(R) 6788P
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   1
   Core(s) per socket:                   64
   Socket(s):                            12
   Stepping:                             1
   CPU(s) scaling MHz:                   21%
   CPU max MHz:                          3800.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             3999.53
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
                                         xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64
                                         monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                                         sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                                         f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3
                                         cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                         ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                                         invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                         clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                         xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                                         wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                                         hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                         vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                                         la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                         md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                         avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
                                         ibpb_exit_to_user
   L1d cache:                            36 MiB (768 instances)
   L1i cache:                            48 MiB (768 instances)
   L2 cache:                             1.5 GiB (768 instances)
   L3 cache:                             3.9 GiB (12 instances)
   NUMA node(s):                         24
   NUMA node0 CPU(s):                    0-31
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node1 CPU(s):                       32-63
   NUMA node2 CPU(s):                       64-95
   NUMA node3 CPU(s):                       96-127
   NUMA node4 CPU(s):                       128-159
   NUMA node5 CPU(s):                       160-191
   NUMA node6 CPU(s):                       192-223
   NUMA node7 CPU(s):                       224-255
   NUMA node8 CPU(s):                       256-287
   NUMA node9 CPU(s):                       288-319
   NUMA node10 CPU(s):                      320-351
   NUMA node11 CPU(s):                      352-383
   NUMA node12 CPU(s):                      384-415
   NUMA node13 CPU(s):                      416-447
   NUMA node14 CPU(s):                      448-479
   NUMA node15 CPU(s):                      480-511
   NUMA node16 CPU(s):                      512-543
   NUMA node17 CPU(s):                      544-575
   NUMA node18 CPU(s):                      576-607
   NUMA node19 CPU(s):                      608-639
   NUMA node20 CPU(s):                      640-671
   NUMA node21 CPU(s):                      672-703
   NUMA node22 CPU(s):                      704-735
   NUMA node23 CPU(s):                      736-767
   Vulnerability Gather data sampling:      Not affected
   Vulnerability Indirect target selection: Not affected
   Vulnerability Itlb multihit:             Not affected
   Vulnerability L1tf:                      Not affected
   Vulnerability Mds:                       Not affected
   Vulnerability Meltdown:                  Not affected
   Vulnerability Mmio stale data:           Not affected
   Vulnerability Reg file data sampling:    Not affected
   Vulnerability Retbleed:                  Not affected
   Vulnerability Spec rstack overflow:      Not affected
   Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                            sanitization
   Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                            PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                     Not affected
   Vulnerability Tsa:                       Not affected
   Vulnerability Tsx async abort:           Not affected
   Vulnerability Vmscape:                   Mitigation; IBPB before exit to userspace

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K      36M   12 Data            1     64        1             64
      L1i       64K      48M   16 Instruction     1     64        1             64
      L2         2M     1.5G   16 Unified         2   2048        1             64
      L3       336M     3.9G   16 Unified         3 344064        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 24 nodes (0-23)
   node 0 cpus: 0-31
   node 0 size: 256990 MB
   node 0 free: 251236 MB
   node 1 cpus: 32-63
   node 1 size: 250021 MB
   node 1 free: 248618 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 2 cpus: 64-95
node 2 size: 258039 MB
node 2 free: 254869 MB
node 3 cpus: 96-127
node 3 size: 250037 MB
node 3 free: 248898 MB
node 4 cpus: 128-159
node 4 size: 258039 MB
node 4 free: 255815 MB
node 5 cpus: 160-191
node 5 size: 250037 MB
node 5 free: 243130 MB
node 6 cpus: 192-223
node 6 size: 258039 MB
node 6 free: 250093 MB
node 7 cpus: 224-255
node 7 size: 250037 MB
node 7 free: 244836 MB
node 8 cpus: 256-287
node 8 size: 258000 MB
node 8 free: 257704 MB
node 9 cpus: 288-319
node 9 size: 250037 MB
node 9 free: 249812 MB
node 10 cpus: 320-351
node 10 size: 258039 MB
node 10 free: 257742 MB
node 11 cpus: 352-383
node 11 size: 250037 MB
node 11 free: 249785 MB
node 12 cpus: 384-415
node 12 size: 258039 MB
node 12 free: 257843 MB
node 13 cpus: 416-447
node 13 size: 250037 MB
node 13 free: 249771 MB
node 14 cpus: 448-479
node 14 size: 258039 MB
node 14 free: 257817 MB
node 15 cpus: 480-511
node 15 size: 250037 MB
node 15 free: 249818 MB
node 16 cpus: 512-543
node 16 size: 258039 MB
node 16 free: 257663 MB
node 17 cpus: 544-575
node 17 size: 250037 MB
node 17 free: 249691 MB
node 18 cpus: 576-607
node 18 size: 258039 MB
node 18 free: 257741 MB
node 19 cpus: 608-639
node 19 size: 250037 MB
node 19 free: 249676 MB
node 20 cpus: 640-671
node 20 size: 258039 MB
node 20 free: 257733 MB
node 21 cpus: 672-703
node 21 size: 250037 MB
node 21 free: 249651 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 22 cpus: 704-735
  node 22 size: 258039 MB
  node 22 free: 257677 MB
  node 23 cpus: 736-767
  node 23 size: 248967 MB
  node 23 free: 248635 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23
    0:  10  12  16  16  16  16  18  18  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    1:  12  10  16  16  16  16  18  18  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    2:  16  16  10  12  18  18  16  16  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    3:  16  16  12  10  18  18  16  16  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    4:  16  16  18  18  10  12  16  16  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    5:  16  16  18  18  12  10  16  16  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    6:  18  18  16  16  16  16  10  12  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    7:  18  18  16  16  16  16  12  10  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40
    8:  40  40  40  40  40  40  40  40  10  12  16  16  16  16  18  18  40  40  40  40  40  40  40  40
    9:  40  40  40  40  40  40  40  40  12  10  16  16  16  16  18  18  40  40  40  40  40  40  40  40
   10:  40  40  40  40  40  40  40  40  16  16  10  12  18  18  16  16  40  40  40  40  40  40  40  40
   11:  40  40  40  40  40  40  40  40  16  16  12  10  18  18  16  16  40  40  40  40  40  40  40  40
   12:  40  40  40  40  40  40  40  40  16  16  18  18  10  12  16  16  40  40  40  40  40  40  40  40
   13:  40  40  40  40  40  40  40  40  16  16  18  18  12  10  16  16  40  40  40  40  40  40  40  40
   14:  40  40  40  40  40  40  40  40  18  18  16  16  16  16  10  12  40  40  40  40  40  40  40  40
   15:  40  40  40  40  40  40  40  40  18  18  16  16  16  16  12  10  40  40  40  40  40  40  40  40
   16:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  10  12  16  16  16  16  18  18
   17:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  12  10  16  16  16  16  18  18
   18:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  16  16  10  12  18  18  16  16
   19:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  16  16  12  10  18  18  16  16
   20:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  16  16  18  18  10  12  16  16
   21:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  16  16  18  18  12  10  16  16
   22:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  18  18  16  16  16  16  10  12
   23:  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  40  18  18  16  16  16  16  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       6241018480 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 1 13:48

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.27+suse.179.g75eab961ea)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
                  cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
                  display-manager getty@ hpe-auto-config hpe_irqbalance iscsi issue-generator kbdsettings
                  kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback
                  rsyslog smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked
                  wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-fsck-root systemd-remount-fs
  disabled        accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
                  bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamd clamonacc
                  console-getty cups cups-browsed cxl-monitor debug-shell ebtables exchange-bmc-os-info
                  firewalld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance iscsi-init iscsid
```

(Continued on next page)

Platform Notes (Continued)

```
                  issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
                  ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount ostree-state-overlay@
                  rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd smartd_generate_opts smb snmpd
                  snmptrapd spamd spampd speech-dispatcherd srp_daemon srp_daemon_port@ sysstat
                  sysstat_collect sysstat_summary systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                  udisks2 update-system-flatpaks upower vncserver@ winbind wsdd ypbind
  indirect        serial-getty@ systemd-userdbd tftp wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.31-default
  root=UUID=8f7dbb2d-77d8-40d9-b606-6b60ffd4e6ad
  rd.auto=1
  console=ttyS0,115200n8
  selinux=0
  security=
  splash=silent
  mitigations=auto
  console=ttyS0,115200
  udev.children-max=512
  nmi_watchdog=0
  uv_nmi.action=kdump
  add_efi_memmap
  tsc=nowatchdog
  earlyprintk=ttyS0,115200
  log_buf_len=8M
  numa_balancing=disable
  crashkernel=1G,high
  watchdog_thresh=60
  workqueue.watchdog_thresh=120

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 170:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  No current active profile.

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release             SUSE Linux Enterprise Server 15 SP7
  hpe-foundation-release HPE Foundation Software 2.5.9, Build 757.1570.260209T0200.a.sles15sp7hpe-260209T0200

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 xfs   1.5T   64G  1.4T   5% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        Compute Scale-up Server 3250
    Product Family: 1590PID03030202
    Serial:         5UFD3H1626-000

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    46x Samsung M321R8GA0EB2-CCPKC 64 GB 2 rank 6400
    50x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      Bundle:1.0.308-20260123_101935 SFW:010.001.004.000.2601210240
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Date:        01/21/2026
```

Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran        | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C     | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CSS-GNR-rev1.3.html`
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CSS-GNR-rev1.3.xml`
`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-01 18:13:06-0500.
Report generated on 2026-05-26 11:59:57 by CPU2017 PS formatter v6716.
Originally published on 2026-04-21.