



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12


(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

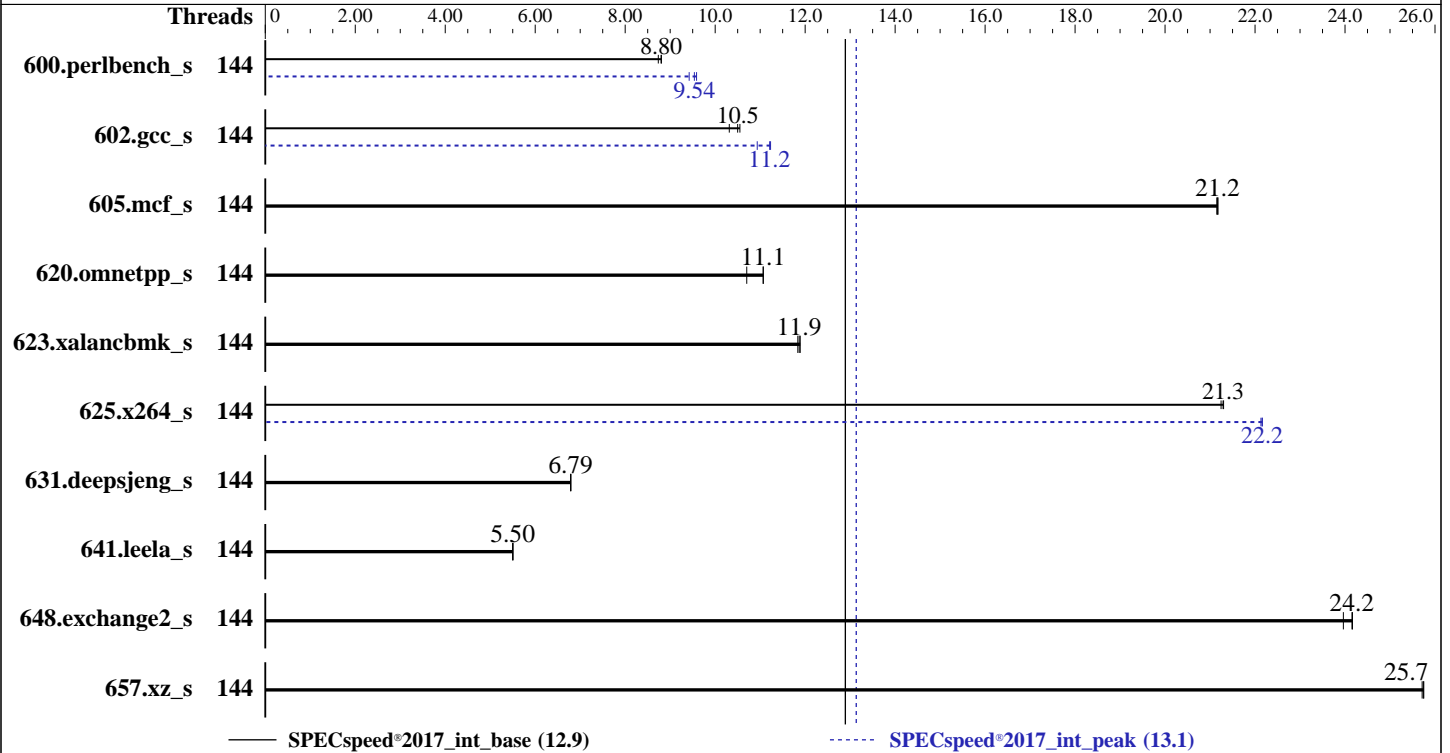

Hardware

CPU Name: Intel Xeon 6776P-B
Max MHz: 3500
Nominal: 2300
Enabled: 72 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 288 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.6 (Plow)
Kernel 5.14.0-570.12.1.el9_6.x86_64
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.30 02/06/2026 released Feb-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	144	202	8.81	203	8.74	202	8.80	144	186	9.54	185	9.59	188	9.42
602.gcc_s	144	379	10.5	386	10.3	377	10.5	144	355	11.2	355	11.2	364	10.9
605.mcf_s	144	223	21.2	223	21.2	223	21.1	144	223	21.2	223	21.2	223	21.1
620.omnetpp_s	144	147	11.1	147	11.1	152	10.7	144	147	11.1	147	11.1	152	10.7
623.xalancbmk_s	144	119	11.9	120	11.8	119	11.9	144	119	11.9	120	11.8	119	11.9
625.x264_s	144	83.0	21.2	82.8	21.3	82.9	21.3	144	79.6	22.2	79.6	22.2	79.7	22.1
631.deepsjeng_s	144	211	6.79	211	6.79	211	6.79	144	211	6.79	211	6.79	211	6.79
641.leela_s	144	310	5.50	310	5.50	310	5.50	144	310	5.50	310	5.50	310	5.50
648.exchange2_s	144	123	24.0	122	24.2	122	24.2	144	123	24.0	122	24.2	122	24.2
657.xz_s	144	240	25.7	240	25.7	240	25.8	144	240	25.7	240	25.7	240	25.8

SPECspeed®2017_int_base = **12.9**

SPECspeed®2017_int_peak = **13.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to virtual-host using 'tuned-adm profile virtual-host'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Thermal Configuration set to Maximum Cooling
Sub-NUMA Clustering (SNC) set to Enabled
Last Level Cache (LLC) Prefetch set to Enabled
Enhanced Processor Performance Profile set to Aggressive
Memory Patrol Scrubbing set to Disabled
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Uncore Frequency Scaling set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Mar 31 20:05:00 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-51.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-570.12.1.e19_6.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Apr 4 10:41:31 EDT 2025
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:05:00 up 15:51, 3 users, load average: 3.59, 5.24, 3.33
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root     pts/0    04:15    7:12m  0.85s  0.00s  -bash
root     pts/1    08:02   12:02m  0.00s  0.00s  -bash
root     pts/2   12:19    7:45m  0.00s  0.00s  -bash
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1030472
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1030472
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2025.2-linux64-graniterapids-speed-20250605.cfg --iterations=3 --reportable --define cores=144 --tune
  base,peak -o all --define intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2025.2-linux64-graniterapids-speed-20250605.cfg --iterations 3 --reportable --define cores=144 --tune
  base,peak --output_format all --define intspeedaffinity --define drop_caches --nopower --runmode speed
  --tune base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.003/templogs/preenv.intspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) 6776P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping       : 1
microcode      : 0x1000303
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 72
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-35,64-99
physical id 0: apicids 0-71,128-199
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       144
On-line CPU(s) list:         0-143
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   INTEL(R) XEON(R) 6776P-B
BIOS Model name:             INTEL(R) XEON(R) 6776P-B
CPU family:                   6
Model:                        174
Thread(s) per core:          2
Core(s) per socket:          72
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4600.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt clwb
                             intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                             xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
                             pts vmmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                             vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   4.5 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    288 MiB (1 instance)
NUMA node(s):                2
NUMA node0 CPU(s):           0-35,72-107
NUMA node1 CPU(s):           36-71,108-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Srbds:
Vulnerability Tsx async abort:

PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-35,72-107
node 0 size: 128673 MB
node 0 free: 116988 MB
node 1 cpus: 36-71,108-143
node 1 size: 128990 MB
node 1 free: 125413 MB
node distances:
node    0    1
 0:    10   12
 1:    12   10

```

9. /proc/meminfo

MemTotal: 263847812 kB

10. who -r

run-level 3 Mar 31 04:14

11. Systemd service manager version: systemd 252 (252-51.e19)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd restricted console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata kvm_stat lvm-devices-import man-db-restart-cache-update nftables nvme-fc-autoconnect pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-570.12.1.el9_6.x86_64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

```
-----
14. cpupower frequency-info
analyzing CPU 2:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. tuned-adm active
Current active profile: virtual-host
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      5
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

os-release Red Hat Enterprise Linux 9.6 (Plow)
redhat-release Red Hat Enterprise Linux release 9.6 (Plow)
system-release Red Hat Enterprise Linux release 9.6 (Plow)

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	129G	243G	35%	/home

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute EL140 Gen12
Product Family: ProLiant
Serial: PZEDFAXLMLN075

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
8x Hynix HMC88AHBRA471N 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.30
BIOS Date: 02/06/2026
BIOS Revision: 1.30
Firmware Revision: 1.20

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nonstandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_peak = 13.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-31 10:34:59-0400.

Report generated on 2026-04-22 06:55:21 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-21.