SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410 M8 (Intel Xeon 6728P 2.7 GHz processor)

SPECspeed®2017_fp_base = 373

SPECspeed®2017_fp_peak = 373

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2026
Hardware Availability: May-2025
Software Availability: Jun-2025

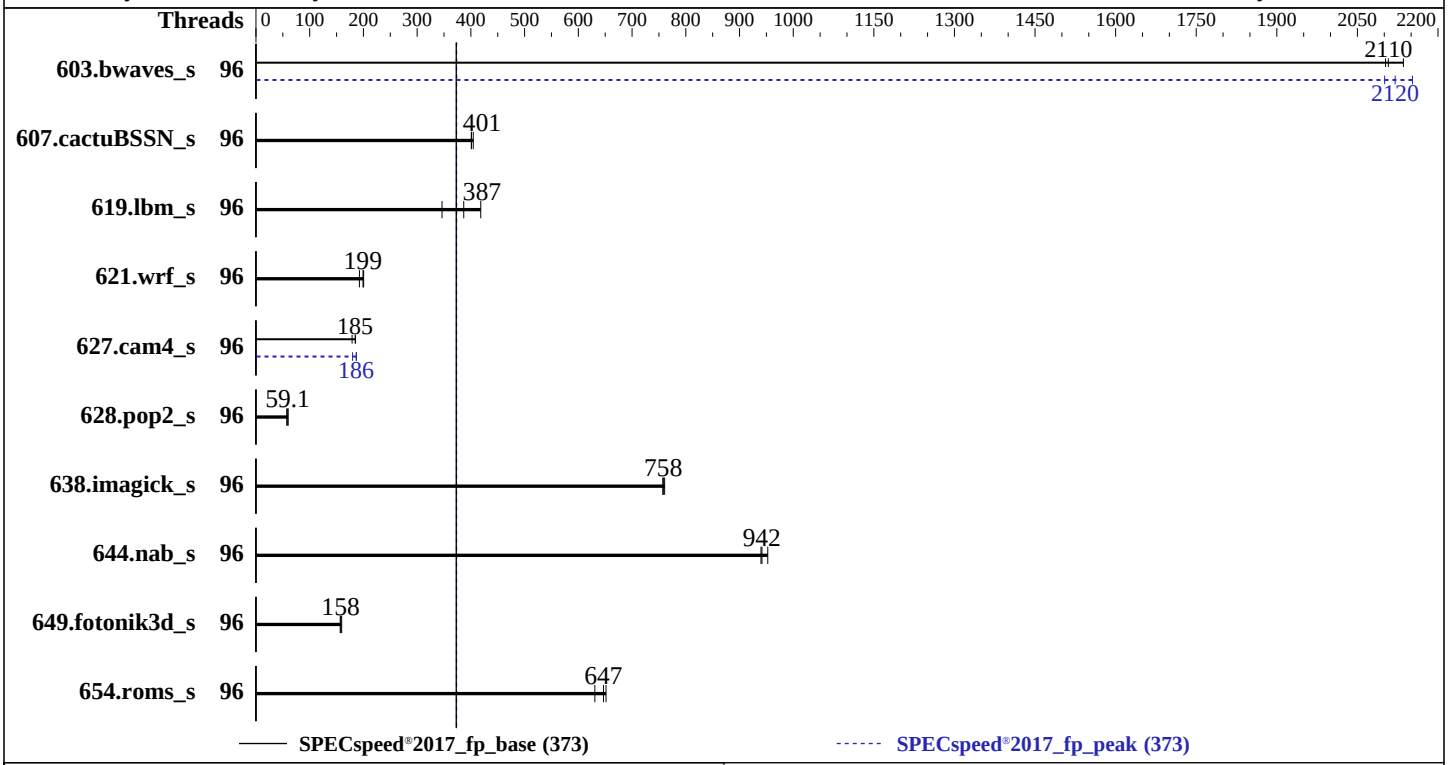

Hardware

CPU Name:	Intel Xeon 6728P
Max MHz:	4100
Nominal:	2700
Enabled:	96 cores, 4 chips, 2 threads/core
Orderable:	2,4 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	144 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 400 GB NVME SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 6.0.2b released Jan-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410 M8 (Intel Xeon 6728P 2.7 GHz processor)

SPECspeed®2017_fp_base = 373

SPECspeed®2017_fp_peak = 373

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Apr-2026
Hardware Availability: May-2025
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	27.6	2140	**28.0**	**2110**	28.1	2100	96	**27.8**	**2120**	27.4	2150	28.1	2100
607.cactuBSSN_s	96	**41.6**	**401**	41.2	404	41.6	401	96	**41.6**	**401**	41.2	404	41.6	401
619.lbm_s	96	15.1	346	**13.5**	**387**	12.5	418	96	15.1	346	**13.5**	**387**	12.5	418
621.wrf_s	96	66.0	200	68.7	193	**66.4**	**199**	96	66.0	200	68.7	193	**66.4**	**199**
627.cam4_s	96	**47.9**	**185**	47.9	185	49.5	179	96	49.3	180	47.4	187	**47.5**	**186**
628.pop2_s	96	**201**	**59.1**	207	57.2	198	59.8	96	**201**	**59.1**	207	57.2	198	59.8
638.imagick_s	96	19.0	761	19.1	757	**19.0**	**758**	96	19.0	761	19.1	757	**19.0**	**758**
644.nab_s	96	**18.6**	**942**	18.6	940	18.3	953	96	**18.6**	**942**	18.6	940	18.3	953
649.fotonik3d_s	96	58.1	157	57.1	160	**57.8**	**158**	96	58.1	157	57.1	160	**57.8**	**158**
654.roms_s	96	**24.3**	**647**	24.2	652	25.0	631	96	**24.3**	**647**	24.2	652	25.0	631

SPECspeed®2017_fp_base = 373

SPECspeed®2017_fp_peak = 373

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Hardware prefetcher set to Enabled
Adjacent cache line prefetcher set to Enabled
Patrol scrub set to Disabled
XPT prefetch set to Disabled
LLC prefetch set to Enabled
Enhanced CPU performance set to Auto

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Mon Apr  6 02:42:22 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    02:42:22 up 19 min,  1 user,  load average: 0.12, 0.03, 0.04
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
  root     pts/0    10.29.148.201    02:41    6.00s  0.81s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8254212
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8254212
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=96 --tune base,peak -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=96 --tune base,peak --output_format all
   --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.103/templogs/preenv.fpspeed.103.0.log --lognum 103.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6728P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 24
    siblings        : 48
    4 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 2: core ids 0-23
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 3: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 128-175
    physical id 2: apicids 256-303
    physical id 3: apicids 384-431
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        46 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               192
  On-line CPU(s) list:                  0-191
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6728P
  BIOS Model name:                      Intel(R) Xeon(R) 6728P  CPU @ 2.7GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   24
  Socket(s):                            4
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   100%
  CPU max MHz:                          2701.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             5400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                                        invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                                        wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke
                                        waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                                        movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                                        ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                        arch_capabilities
  L1d cache:                            4.5 MiB (96 instances)
  L1i cache:                            6 MiB (96 instances)
  L2 cache:                             192 MiB (96 instances)
  L3 cache:                             576 MiB (4 instances)
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-23,96-119
  NUMA node1 CPU(s):                    24-47,120-143
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node2 CPU(s):                   48-71,144-167
  NUMA node3 CPU(s):                   72-95,168-191
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       64K       6M   16 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       144M     576M   16 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23,96-119
  node 0 size: 515414 MB
  node 0 free: 514315 MB
  node 1 cpus: 24-47,120-143
  node 1 size: 516083 MB
  node 1 free: 515196 MB
  node 2 cpus: 48-71,144-167
  node 2 size: 516083 MB
  node 2 free: 515093 MB
  node 3 cpus: 72-95,168-191
  node 3 size: 515998 MB
  node 3 free: 515269 MB
  node distances:
  node   0   1   2   3
    0:  10  21  21  21
    1:  21  10  21  21
    2:  21  21  10  21
    3:  21  21  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113105092 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 6 02:23

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      degraded
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                   wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                   udisks2 vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=c9a29bb1-f95d-4e5a-816b-db69c8356128
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 127:
    current policy: frequency should be within 800 MHz and 2.70 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: latency-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  371G   27G  341G   8% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-410C-M8
    Serial:         FVH2920P0DV

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
    18x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
    13x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Cisco Systems, Inc.
   BIOS Version:      X410M8.6.0.2b.0.0130261958
   BIOS Date:         01/30/2026
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s: `-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V2.0-GNR-revI.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V2.0-GNR-revI.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-04-06 05:42:22-0400.
Report generated on 2026-05-06 09:58:27 by CPU2017 PS formatter v6716.
Originally published on 2026-05-05.