



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant Compute ML350 Gen12  
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017\_int\_base = 401

SPECrate®2017\_int\_peak = 405

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Apr-2026  
Hardware Availability: May-2026  
Software Availability: Dec-2025

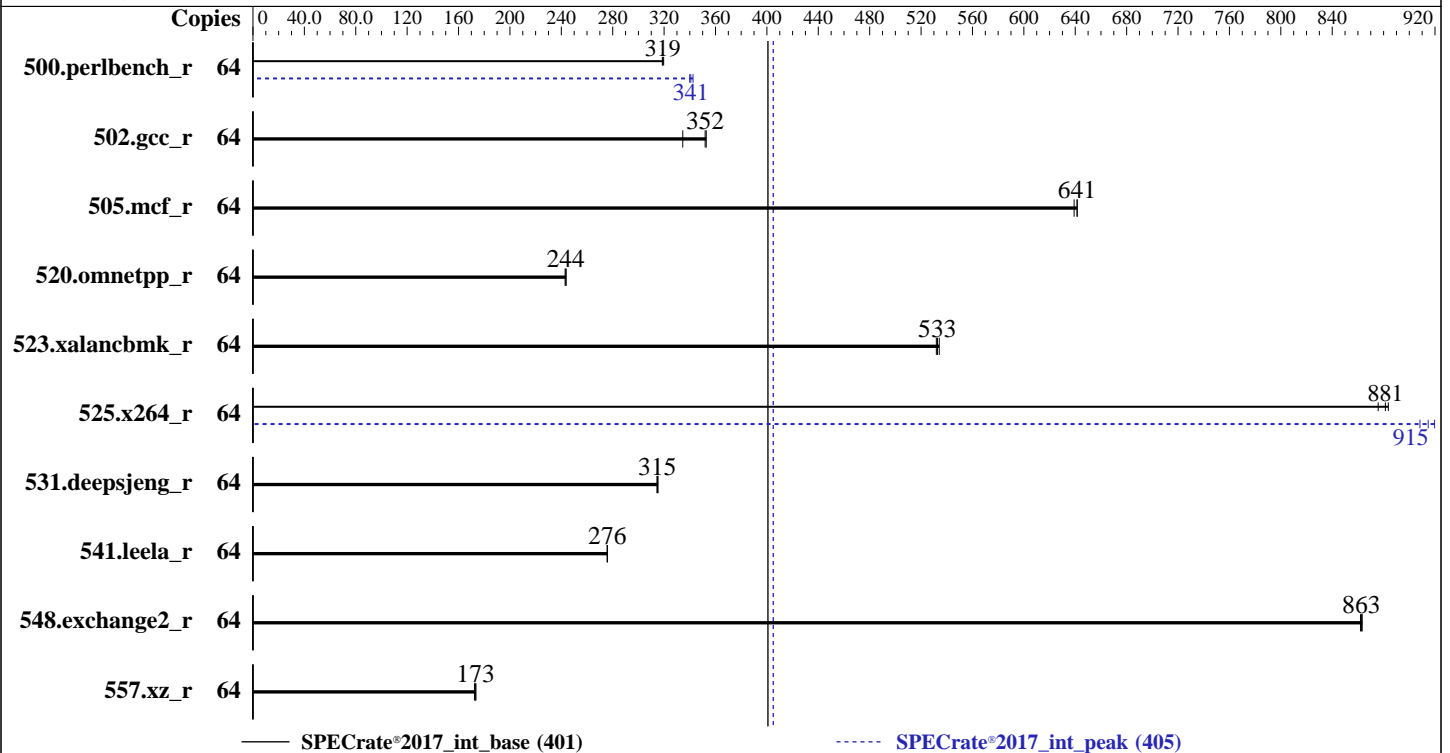

### Hardware

CPU Name: Intel Xeon 6725P  
 Max MHz: 4800  
 Nominal: 3700  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 192 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 3.2 TB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
 Kernel 6.4.0-150700.53.6-default  
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.64 02/26/2026 released Feb-2026  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12  
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017\_int\_base = 401

SPECrate®2017\_int\_peak = 405

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Apr-2026  
Hardware Availability: May-2026  
Software Availability: Dec-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>319</b>	<b>319</b>	320	319	319	320	64	297	343	300	340	<b>299</b>	<b>341</b>
502.gcc_r	64	271	335	257	353	<b>257</b>	<b>352</b>	64	271	335	257	353	<b>257</b>	<b>352</b>
505.mcf_r	64	161	642	162	639	<b>161</b>	<b>641</b>	64	161	642	162	639	<b>161</b>	<b>641</b>
520.omnetpp_r	64	<b>345</b>	<b>244</b>	345	244	346	243	64	<b>345</b>	<b>244</b>	345	244	346	243
523.xalancbmk_r	64	127	534	<b>127</b>	<b>533</b>	127	532	64	127	534	<b>127</b>	<b>533</b>	127	532
525.x264_r	64	127	884	128	876	<b>127</b>	<b>881</b>	64	<b>123</b>	<b>915</b>	123	908	122	920
531.deepsjeng_r	64	233	314	233	315	<b>233</b>	<b>315</b>	64	233	314	233	315	<b>233</b>	<b>315</b>
541.leela_r	64	385	276	384	276	<b>384</b>	<b>276</b>	64	385	276	384	276	<b>384</b>	<b>276</b>
548.exchange2_r	64	<b>194</b>	<b>863</b>	194	863	195	862	64	<b>194</b>	<b>863</b>	194	863	195	862
557.xz_r	64	399	173	<b>399</b>	<b>173</b>	401	172	64	399	173	<b>399</b>	<b>173</b>	401	172

SPECrate®2017\_int\_base = **401**

SPECrate®2017\_int\_peak = **405**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was turned off using 'tuned-adm off'
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**  
(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Dec-2025

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below  
Workload Profile set to General Throughput Compute  
Thermal Configuration set to Maximum Cooling  
Enhanced Processor Performance Profile set to Aggressive  
Memory Patrol Scrubbing set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on htvirusaudit Wed Apr 29 05:04:08 2026
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux htvirusaudit 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:04:08 up 1 min, 3 users, load average: 0.75, 0.28, 0.10
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**  
(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Dec-2025

## Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority      (-e) 0
   file size               (blocks, -f) unlimited
   pending signals         (-i) 2062791
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 2062791
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root [priv]
   sshd: root@notty
   bash -c cd $SPEC/ && $SPEC/intrate_linux_gnr_smt_on.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --reportable --iterations=3 --define smt-on --define
   cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o
   all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
   ic2025.2-linux64-graniterapids-rate-20250605.cfg --reportable --iterations 3 --define smt-on --define
   cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0
   --from_runcpu 2
   specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6725P
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 173
   stepping       : 1
   microcode      : 0x1000411
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
   cpu cores      : 16
   siblings       : 32
   2 physical ids (chips)
   64 processors (hardware threads)
   physical id 0: core ids 0-15
   physical id 1: core ids 0-15
   physical id 0: apicids 0-31
   physical id 1: apicids 128-159
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12  
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017\_int\_base = 401

SPECrate®2017\_int\_peak = 405

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Dec-2025

## Platform Notes (Continued)

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6725P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
Stepping:              1
BogoMIPS:              7400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vmmi avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            1.5 MiB (32 instances)
L1i cache:            2 MiB (32 instances)
L2 cache:             64 MiB (32 instances)
L3 cache:             384 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):   0-15,32-47
NUMA node1 CPU(s):   16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**  
(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Dec-2025

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	64K	2M	16	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	192M	384M	16	Unified	3	196608	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257714 MB
node 0 free: 256846 MB
node 1 cpus: 16-31,48-63
node 1 size: 258016 MB
node 1 free: 257197 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

9. /proc/meminfo

MemTotal: 528108524 kB

10. who -r

run-level 3 Apr 29 05:03

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievad issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**

(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Dec-2025

## Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=5e165ba9-351d-4db7-a466-de806b4be7b9
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 60:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

No current active profile.

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

17. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**

(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Dec-2025

## Platform Notes (Continued)

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP7

### 20. Disk information

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 btrfs 3.0T 57G 2.9T 2% /home

### 21. /sys/devices/virtual/dmi/id

Vendor: HPE  
Product: HPE ProLiant Compute ML350 Gen12  
Product Family: ProLiant  
Serial: CNXD1M00H8

### 22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
13x Hynix HMC88AHBRA471N 32 GB 2 rank 6400  
3x Hynix HMC88AHBRA472N 32 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.64  
BIOS Date: 02/26/2026  
BIOS Revision: 1.64  
Firmware Revision: 1.20

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base, peak) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**

(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Dec-2025

## Compiler Version Notes (Continued)

Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017\_int\_base = 401

SPECrate®2017\_int\_peak = 405

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Dec-2025

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow -fno-strict-aliasing  
-L/home/specdev/intel-compilers/compiler/2025.2/lib  
-lqkmalloc  
  
502.gcc_r: basepeak = yes  
  
505.mcf_r: basepeak = yes  
  
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute ML350 Gen12**

(3.70 GHz, Intel Xeon 6725P)

**SPECrate®2017\_int\_base = 401**

**SPECrate®2017\_int\_peak = 405**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Dec-2025

## Peak Optimization Flags (Continued)

525.x264\_r (continued):

-L/home/specdev/intel-compilers/compiler/2025.2/lib  
-lqkmalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-04-28 19:34:08-0400.

Report generated on 2026-05-19 17:28:29 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-19.