



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

CPU2017 License: 6042


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Apr-2026

Hardware Availability: Oct-2025

Software Availability: Mar-2026

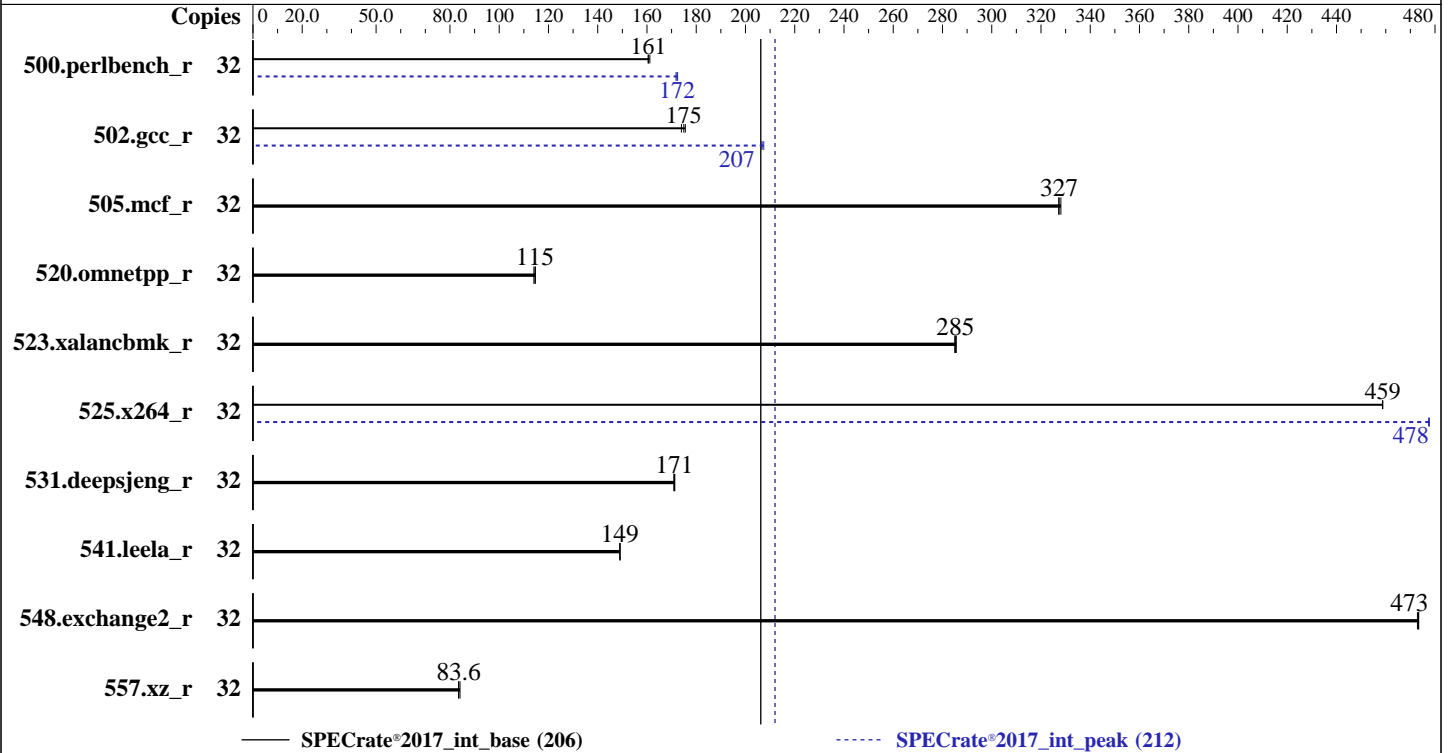

### Hardware

CPU Name: Intel Xeon 6507P  
 Max MHz: 4300  
 Nominal: 3500  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (16 x 96 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1 960GB M.2 NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: Ubuntu 22.04.5 LTS  
 5.15.0-176-generic  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version ES418INW.M01 released Sep-2025  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Apr-2026

Hardware Availability: Oct-2025

Software Availability: Mar-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	<b><u>317</u></b>	<b><u>161</u></b>	317	160	316	161	32	295	172	297	172	<b><u>296</u></b>	<b><u>172</u></b>
502.gcc_r	32	260	174	<b><u>259</u></b>	<b><u>175</u></b>	258	176	32	218	207	219	207	<b><u>219</u></b>	<b><u>207</u></b>
505.mcf_r	32	158	327	<b><u>158</u></b>	<b><u>327</u></b>	158	328	32	158	327	<b><u>158</u></b>	<b><u>327</u></b>	158	328
520.omnetpp_r	32	<b><u>367</u></b>	<b><u>115</u></b>	368	114	366	115	32	<b><u>367</u></b>	<b><u>115</u></b>	368	114	366	115
523.xalancbmk_r	32	118	286	119	285	<b><u>118</u></b>	<b><u>285</u></b>	32	118	286	119	285	<b><u>118</u></b>	<b><u>285</u></b>
525.x264_r	32	<b><u>122</u></b>	<b><u>459</u></b>	122	459	122	459	32	<b><u>117</u></b>	<b><u>478</u></b>	117	477	117	478
531.deepsjeng_r	32	215	171	<b><u>214</u></b>	<b><u>171</u></b>	214	171	32	215	171	<b><u>214</u></b>	<b><u>171</u></b>	214	171
541.leela_r	32	<b><u>356</u></b>	<b><u>149</u></b>	356	149	356	149	32	<b><u>356</u></b>	<b><u>149</u></b>	356	149	356	149
548.exchange2_r	32	<b><u>177</u></b>	<b><u>473</u></b>	177	473	177	473	32	<b><u>177</u></b>	<b><u>473</u></b>	177	473	177	473
557.xz_r	32	414	83.5	<b><u>414</u></b>	<b><u>83.6</u></b>	411	84.1	32	414	83.5	<b><u>414</u></b>	<b><u>83.6</u></b>	411	84.1

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Apr-2026

**Hardware Availability:** Oct-2025

**Software Availability:** Mar-2026

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Hyper-Threading [ALL]: Enable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on benchmark Mon Apr 27 16:42:08 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.19)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux benchmark 5.15.0-176-generic #186-Ubuntu SMP Fri Mar 13 11:01:42 UTC 2026 x86\_64 x86\_64 x86\_64  
GNU/Linux

-----

2. w  
16:42:08 up 4 min, 2 users, load average: 0.08, 0.11, 0.04

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
intel	tty1	-	16:41	48.00s	0.13s	0.03s	-bash
intel	pts/0	-	16:41	8.00s	1.24s	0.06s	sudo su

-----

3. Username  
From environment variable \$USER: root  
From the command 'logname': intel

-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Apr-2026

**Hardware Availability:** Oct-2025

**Software Availability:** Mar-2026

## Platform Notes (Continued)

### 4. ulimit -a

```

time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 198113080
process                6190566
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6507P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:                x86_64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Apr-2026

**Hardware Availability:** Oct-2025

**Software Availability:** Mar-2026

## Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Address sizes:           52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                  32
On-line CPU(s) list:    0-31
Vendor ID:                GenuineIntel
Model name:              Intel(R) Xeon(R) 6507P
CPU family:              6
Model:                   173
Thread(s) per core:     2
Core(s) per socket:     8
Socket(s):               2
Stepping:                1
CPU max MHz:             4300.0000
CPU min MHz:             800.0000
BogoMIPS:                7000.00
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vmmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma cflushopt clwb intel_pt avx512cd sha_ni avx512bw
                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                        vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                        la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                        md_clear serialize tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16
                        amx_tile amx_int8 flush_lld arch_capabilities ibpb_exit_to_user
Virtualization:          VT-x
L1d cache:               768 KiB (16 instances)
L1i cache:               1 MiB (16 instances)
L2 cache:                32 MiB (16 instances)
L3 cache:                96 MiB (2 instances)
NUMA node(s):           2
NUMA node0 CPU(s):      0-7,16-23
NUMA node1 CPU(s):      8-15,24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

**SPECrate®2017\_int\_base = 206**  
**SPECrate®2017\_int\_peak = 212**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Apr-2026  
**Hardware Availability:** Oct-2025  
**Software Availability:** Mar-2026

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsa: Not affected  
Vulnerability Tsx async abort: Not affected  
Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	64K	1M	16	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	48M	96M	16	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 773621 MB
node 0 free: 772565 MB
node 1 cpus: 8-15,24-31
node 1 size: 774137 MB
node 1 free: 773169 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1584904668 kB
```

10. who -r

```
run-level 3 Apr 27 16:40
```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.19)

```
Default Target Status
multi-user degraded
```

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* systemd-networkd-wait-online.service	loaded	failed	failed	Wait for Network to be Configured

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor atop atopacct binfmt-support blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore-check systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync upower
generated	apport openipmi

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Apr-2026

Hardware Availability: Oct-2025

Software Availability: Mar-2026

## Platform Notes (Continued)

```
indirect          uuid
masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                  x11-common
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-176-generic
root=UUID=d23f4c96-e4ba-4003-a8ac-11587c2fe77c
ro
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p5  ext4  701G  428G  237G  65% /home
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

**SPECrate®2017\_int\_base = 206**

**SPECrate®2017\_int\_peak = 212**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Apr-2026  
**Hardware Availability:** Oct-2025  
**Software Availability:** Mar-2026

## Platform Notes (Continued)

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero MDI300A3R-212  
Product Family: MDI300A3R-212  
Serial: 2X25003  
-----

21. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x NO DIMM NO DIMM  
16x Samsung M321RYGA0PB2-CCPWC 96 GB 2 rank 6400  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: ES418INW.M01  
BIOS Date: 09/19/2025  
BIOS Revision: 5.35  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Apr-2026  
**Hardware Availability:** Oct-2025  
**Software Availability:** Mar-2026

## Compiler Version Notes (Continued)

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Apr-2026

**Hardware Availability:** Oct-2025

**Software Availability:** Mar-2026

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

SPECrate®2017\_int\_base = 206

SPECrate®2017\_int\_peak = 212

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Apr-2026  
**Hardware Availability:** Oct-2025  
**Software Availability:** Mar-2026

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-EMR-revE.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero MDI300A3R-212)  
(3.50 GHz, Intel Xeon 6507P)

**SPECrate®2017\_int\_base = 206**

**SPECrate®2017\_int\_peak = 212**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Apr-2026  
**Hardware Availability:** Oct-2025  
**Software Availability:** Mar-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-EMR-revE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-04-27 12:42:07-0400.  
Report generated on 2026-06-09 16:40:39 by CPU2017 PDF formatter v6716.  
Originally published on 2026-06-09.