



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

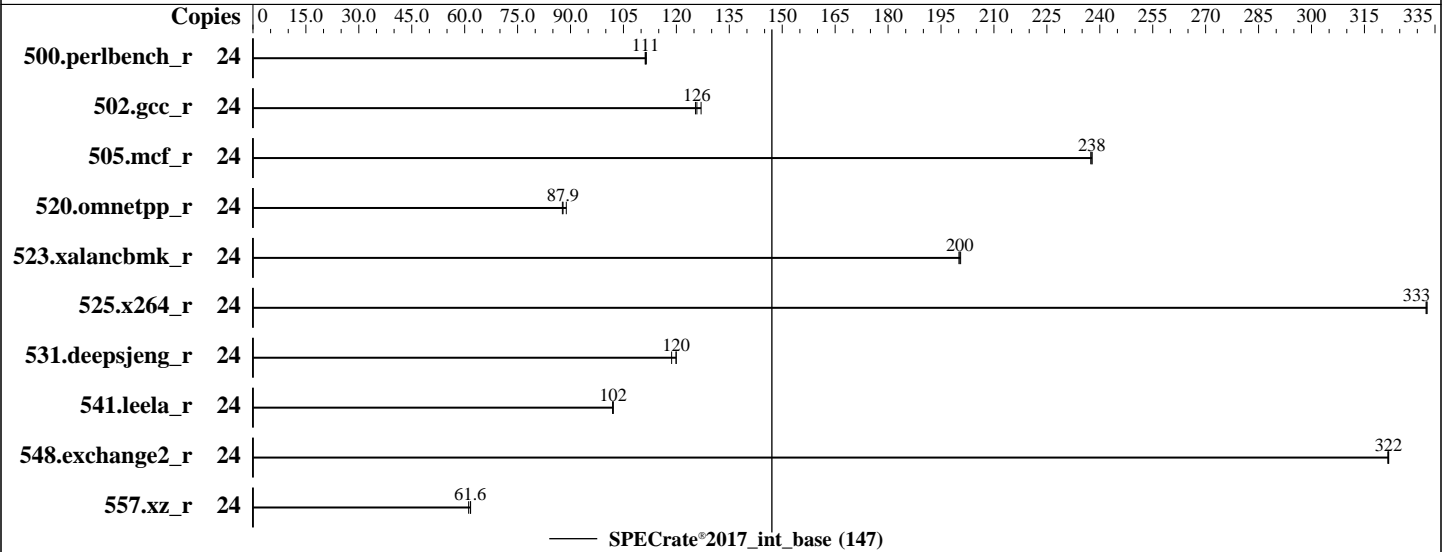

Hardware

CPU Name: Intel Xeon 6505P
 Max MHz: 4100
 Nominal: 2200
 Enabled: 12 cores, 1 chip, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 1.92 TB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
 5.14.0-427.13.1.el9_4.x86_64
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.31.02.19 Released May-2026
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	24	343	111	344	111	343	111							
502.gcc_r	24	271	125	270	126	268	127							
505.mcf_r	24	163	237	163	238	163	238							
520.omnetpp_r	24	355	88.8	358	87.9	359	87.7							
523.xalancbmk_r	24	127	200	126	201	127	200							
525.x264_r	24	126	333	126	332	126	333							
531.deepsjeng_r	24	232	119	229	120	229	120							
541.leela_r	24	389	102	389	102	390	102							
548.exchange2_r	24	195	322	195	322	196	322							
557.xz_r	24	424	61.1	420	61.7	421	61.6							

SPECrate®2017_int_base = 147

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu2026/lib/intel64:/home/speccpu2026/lib/ia32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enabled
LLC Prefetch Set to Disabled
LLC dead line alloc Set to Disabled
Stale AtoS Set to Disabled

Sysinfo program /home/speccpu2026/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue May 26 06:40:19 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.e19_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.e19_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
06:40:19 up 10 min, 2 users, load average: 0.00, 0.00, 0.00
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 06:40 11.00s 0.93s 0.03s -bash
root pts/0 06:30 19.00s 0.03s 0.03s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 1027238
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 1027238
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 24 -c ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define
  smt-on --define cores=12 --define physicalfirst --define invoke_with_interleave --define drop_caches
  --tune base -o all intrate
runcpu --define default-platform-flags --copies 24 --configfile
  ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define smt-on --define cores=12 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu2026

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6505P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 12
siblings       : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-11
physical id 0: apicids 0-23
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu
From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            24

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

```

On-line CPU(s) list:          0-23
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6505P
BIOS Model name:             Intel(R) Xeon(R) 6505P
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          12
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4400.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq
                                dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                                sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                                rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority
                                ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   576 KiB (12 instances)
L1i cache:                   768 KiB (12 instances)
L2 cache:                    24 MiB (12 instances)
L3 cache:                    48 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-23
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability Lltf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                PBRSE-eIBRS Not affected
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   48K   576K   12 Data          1     64     1           64
L1i   64K   768K   16 Instruction   1     64     1           64
L2    2M    24M    16 Unified       2   2048     1           64
L3    48M    48M    16 Unified       3  49152     1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-23
node 0 size: 256852 MB
node 0 free: 255900 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 263016504 kB
```

10. who -r

```
run-level 3 May 26 06:29
```

11. Systemd service manager version: systemd 252 (252-32.el9_4)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2
upower
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot console-getty cpupower debug-shell dnf-system-upgrade
kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable sep5 serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

14. cpupower frequency-info

```
analyzing CPU 19:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. sysctl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

```

kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/speccpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  819G  43G  777G   6% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Product:      2288 V8
Product Family: Birch Stream

```

```

-----
21. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

8x Samsung M321R4GA3EB2-CCPWF 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: INSYDE Corp.
BIOS Version: 01.31.02.19
BIOS Date: 05/08/2026
BIOS Revision: 2.19

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 147

FusionServer 2288 V8 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-25 18:40:18-0400.
Report generated on 2026-06-16 17:49:38 by CPU2017 PDF formatter v6716.
Originally published on 2026-06-16.