



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

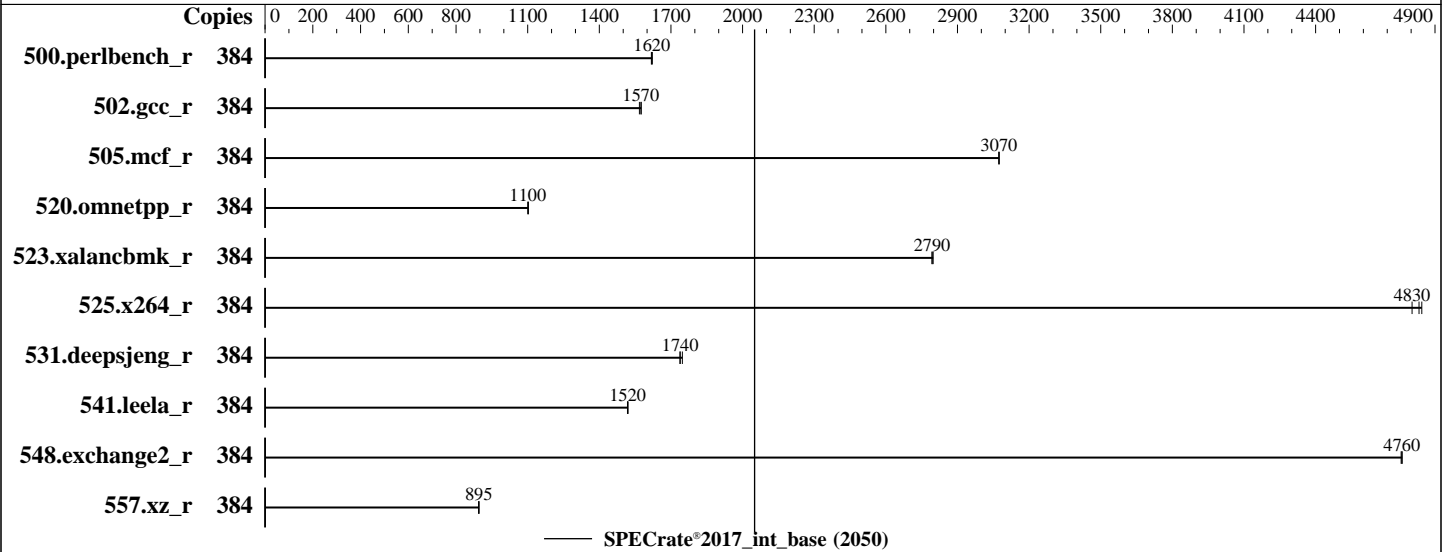

Hardware

CPU Name: Intel Xeon 6966P-C
 Max MHz: 3900
 Nominal: 3100
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 432 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)
 Storage: 1 x 1.92 TB NVME SSD
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version Q5E111L 1.20 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Mar-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	377	1620	<u>377</u>	<u>1620</u>	378	1620							
502.gcc_r	384	345	1580	<u>345</u>	<u>1570</u>	347	1570							
505.mcf_r	384	202	3070	<u>202</u>	<u>3070</u>	202	3070							
520.omnetpp_r	384	458	1100	457	1100	<u>458</u>	<u>1100</u>							
523.xalancbmk_r	384	145	2790	<u>145</u>	<u>2790</u>	145	2800							
525.x264_r	384	140	4800	139	4840	<u>139</u>	<u>4830</u>							
531.deepsjeng_r	384	253	1740	<u>253</u>	<u>1740</u>	252	1750							
541.leela_r	384	418	1520	<u>419</u>	<u>1520</u>	419	1520							
548.exchange2_r	384	211	4760	<u>211</u>	<u>4760</u>	211	4760							
557.xz_r	384	464	894	463	896	<u>463</u>	<u>895</u>							

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2026.0/lib/intel64:/home/cpu2017-1.1.9-ic2026.0/lib/ia32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom

C-States set to Legacy

DCU Streamer Prefetcher set to Disabled

SNC set to Enabled

Processor Plus set to +2

Sysinfo program /home/cpu2017-1.1.9-ic2026.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed May 20 02:06:20 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. ulimit -a
4. sysinfo process ancestry
5. /proc/cpuinfo
6. lscpu
7. numactl --hardware
8. /proc/meminfo
9. who -r
10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
02:06:20 up 6 min, 0 users, load average: 0.06, 1.01, 0.68
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094281
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Mar-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 3094281
virtual memory            (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

```

-----
4. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
/bin/bash /root/auto_executor.sh
/bin/bash ./Run502-compliant-ic2026.0-lin-sapphirerapids-rateint-base-smt-on-20260429.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.016/temlogs/preenv.intrate.016.0.log --lognum 016.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2026.0

```

```

-----
5. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6966P-C
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-31,64-95,128-159
physical id 1: core ids 0-31,64-95,128-159
physical id 0: apicids 0-63,128-191,256-319
physical id 1: apicids 512-575,640-703,768-831
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
6. lscpu

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6966P-C
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    96

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```

Socket(s):                2
Stepping:                 1
BogoMIPS:                6200.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                          ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                          vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                          rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                          intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                          xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                          split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                          arat pln pts hfi vmni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                          gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                          la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                          md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                          amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization:          VT-x
L1d cache:              9 MiB (192 instances)
L1i cache:              12 MiB (192 instances)
L2 cache:               384 MiB (192 instances)
L3 cache:               864 MiB (2 instances)
NUMA node(s):           6
NUMA node0 CPU(s):     0-31,192-223
NUMA node1 CPU(s):     32-63,224-255
NUMA node2 CPU(s):     64-95,256-287
NUMA node3 CPU(s):     96-127,288-319
NUMA node4 CPU(s):     128-159,320-351
NUMA node5 CPU(s):     160-191,352-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	64K	12M	16	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	432M	864M	16	Unified	3	442368	1	64

7. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Mar-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

available: 6 nodes (0-5)
node 0 cpus: 0-31,192-223
node 0 size: 128640 MB
node 0 free: 128094 MB
node 1 cpus: 32-63,224-255
node 1 size: 129006 MB
node 1 free: 128558 MB
node 2 cpus: 64-95,256-287
node 2 size: 129006 MB
node 2 free: 128491 MB
node 3 cpus: 96-127,288-319
node 3 size: 129006 MB
node 3 free: 128576 MB
node 4 cpus: 128-159,320-351
node 4 size: 129006 MB
node 4 free: 128452 MB
node 5 cpus: 160-191,352-383
node 5 size: 128928 MB
node 5 free: 128533 MB
node distances:
node  0  1  2  3  4  5
  0:  10  15  17  26  23  26
  1:  15  10  15  23  26  23
  2:  17  15  10  26  28  21
  3:  26  23  26  10  15  17
  4:  23  26  23  15  10  15
  5:  26  28  21  17  15  10

```

```

-----
8. /proc/meminfo
   MemTotal:      792163908 kB

```

```

-----
9. who -r
   run-level 3 May 20 02:01

```

```

-----
10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
   Default Target Status
   multi-user      running

```

```

-----
11. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd spec-auto sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect systemd-userdbd wickedd

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=ce1519fb-457a-4b1f-ab59-fcfc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
13. cpupower frequency-info
analyzing CPU 145:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
```

```
-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Mar-2026
Software Availability: Apr-2026

Platform Notes (Continued)

18. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2026.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme1n1p3	xfss	1.8T	93G	1.7T	6%	/

19. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:    Lenovo ThinkSystem SC750 V4 Neptune Tray
Product Family: ThinkSystem
Serial:     1234567890
```

20. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
7x SK Hynix HMC88BDJHA380N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA383N 32 GB 2 rank 8800
9x SK Hynix HMC88BDJHA462N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA464N 32 GB 2 rank 8800
```

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Lenovo
BIOS Version:    Q5E111L-1.20
BIOS Date:       12/18/2025
BIOS Revision:   1.20
Firmware Revision: 2.0
```

Compiler Version Notes

```
=====  
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====  
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====  
Fortran | 548.exchange2_r(base)  
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(3.10 GHz, Intel Xeon 6966P-C)

SPECrate®2017_int_base = 2050

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-19 14:06:19-0400.

Report generated on 2026-06-16 17:49:39 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-16.