



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro


SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: May-2026  
Hardware Availability: Jun-2026  
Software Availability: Apr-2026

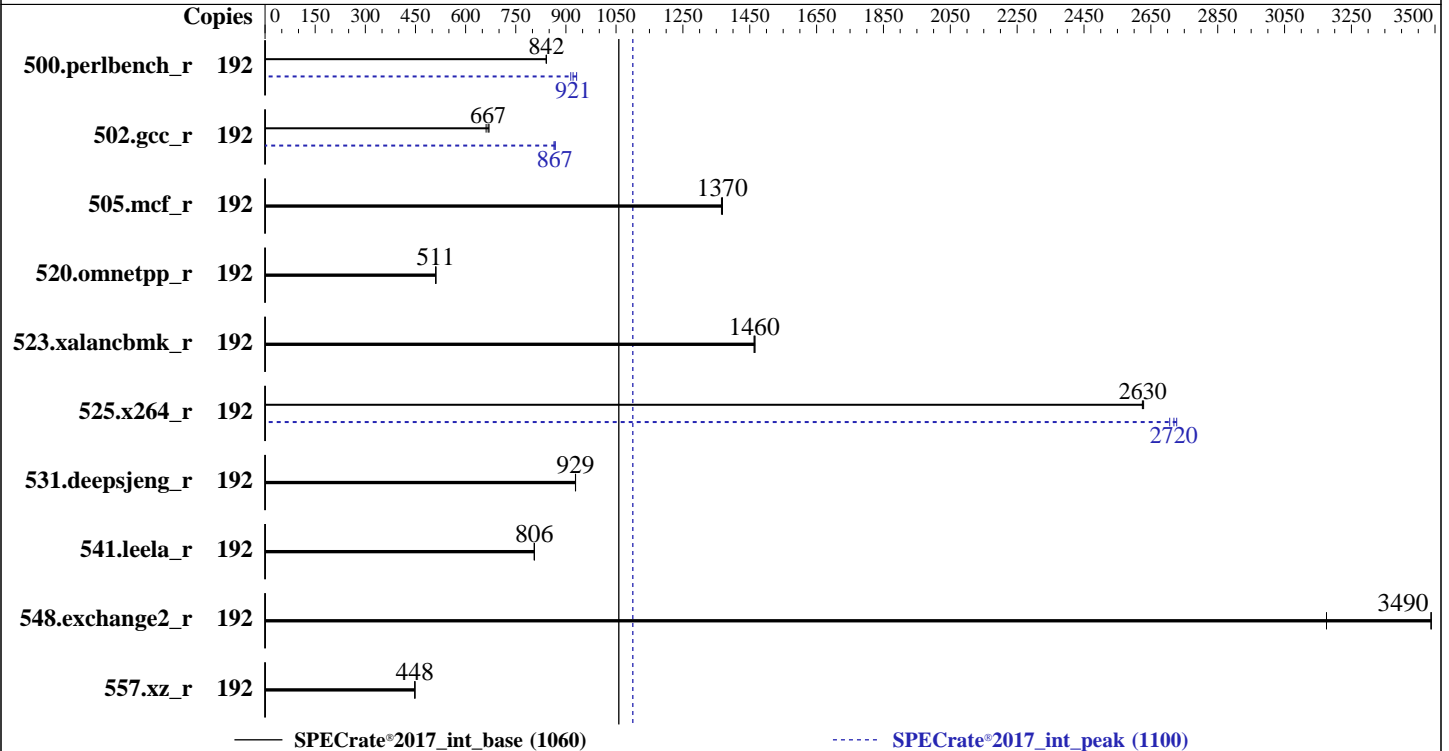

### Hardware

CPU Name: Intel Xeon 6970E+  
Max MHz: 3200  
Nominal: 2300  
Enabled: 192 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 192 MB I+D on chip per chip, 4 MB shared / 4 cores  
L3: 480 MB I+D on chip per chip  
Other: None  
Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)  
Storage: 1 x 480 GB NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.7  
Kernel 5.14.0-611.5.1.el9\_7.x86\_64  
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;  
C/C++: Version 2024.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Parallel: No  
Firmware: Version 1.5b released May-2026  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: May-2026  
Hardware Availability: Jun-2026  
Software Availability: Apr-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	363	841	<b>363</b>	<b>842</b>	363	842	192	328	932	<b>332</b>	<b>921</b>	334	915
502.gcc_r	192	411	661	406	670	<b>407</b>	<b>667</b>	192	315	864	<b>313</b>	<b>867</b>	313	868
505.mcf_r	192	227	1370	227	1370	<b>227</b>	<b>1370</b>	192	227	1370	227	1370	<b>227</b>	<b>1370</b>
520.omnetpp_r	192	<b>493</b>	<b>511</b>	493	511	493	511	192	<b>493</b>	<b>511</b>	493	511	493	511
523.xalancbmk_r	192	<b>139</b>	<b>1460</b>	139	1460	138	1470	192	<b>139</b>	<b>1460</b>	139	1460	138	1470
525.x264_r	192	128	2620	<b>128</b>	<b>2630</b>	128	2630	192	<b>124</b>	<b>2720</b>	124	2710	123	2730
531.deepsjeng_r	192	237	929	237	929	<b>237</b>	<b>929</b>	192	237	929	237	929	<b>237</b>	<b>929</b>
541.leela_r	192	395	805	<b>395</b>	<b>806</b>	394	806	192	395	805	<b>395</b>	<b>806</b>	394	806
548.exchange2_r	192	144	3490	<b>144</b>	<b>3490</b>	158	3180	192	144	3490	<b>144</b>	<b>3490</b>	158	3180
557.xz_r	192	463	448	<b>463</b>	<b>448</b>	463	448	192	463	448	<b>463</b>	<b>448</b>	463	448

SPECrate®2017\_int\_base = **1060**

SPECrate®2017\_int\_peak = **1100**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS settings:  
Workload Profile = HPC  
KTI Prefetch = Enable  
Stale AtoS = Disable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 135-179-165.engtw Wed May 27 18:13:57 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.el9)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux 135-179-165.engtw 5.14.0-611.5.1.el9\_7.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Oct 17 14:16:35 EDT 2025  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
18:13:57 up 2 min, 1 user, load average: 0.01, 0.02, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 18:11 2.00s 1.09s 0.01s -bash  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4640390
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4640390
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6970E+
vendor_id      : GenuineIntel
cpu family      : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores      : 192
siblings       : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-63,128-191,256-319
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,256,258,2
60,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,31
2,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364
,366,368,370,372,374,376,378,380,382,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) 6970E+
BIOS Model name:       Intel(R) Xeon(R) 6970E+
CPU family:             6
Model:                  221
Thread(s) per core:    1
Core(s) per socket:    192
Socket(s):              1
Stepping:               1
BogoMIPS:               4600.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep
                        bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
                        intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        user_shstk avx_vnni lam_wbnoinvd dtherm ida arat pln pts vnmi umip
                        pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                        arch_lbr ibt flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             6 MiB (192 instances)
L1i cache:             12 MiB (192 instances)
L2 cache:              192 MiB (48 instances)
L3 cache:              480 MiB (1 instance)
NUMA node(s):          3
NUMA node0 CPU(s):    0-63
NUMA node1 CPU(s):    64-127
NUMA node2 CPU(s):    128-191
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	64K	12M	8	Instruction	1	128	1	64
L2	4M	192M	16	Unified	2	4096	1	64
L3	480M	480M	16	Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-63
node 0 size: 386111 MB
node 0 free: 384787 MB
node 1 cpus: 64-127
node 1 size: 387055 MB
node 1 free: 385612 MB
node 2 cpus: 128-191
node 2 size: 386994 MB
node 2 free: 385739 MB
node distances:
node    0    1    2
  0:   10   15   17
  1:   15   10   15
  2:   17   15   10

```

9. /proc/meminfo

MemTotal: 1188005584 kB

10. who -r

run-level 3 May 27 18:11

11. Systemd service manager version: systemd 252 (252-55.e19)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

enabled-runtime  systemd-remount-fs
disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                 canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                 cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprint
                 iprupdate iscsi-init iscsid iscsiuiio kpatch kvm_stat ledmon lvm-devices-import
                 man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables
                 nvme-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman
                 podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl
                 rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild selinux-check-proper-disable
                 serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                 systemd-sysext tuned-ppd wpa_supplicant
indirect         iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                 systemd-sysupdate systemd-sysupdate-reboot

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.el9_7.x86_64
root=/dev/mapper/rhel_135--180--133-root
ro
resume=/dev/mapper/rhel_135--180--133-swap
rd.lvm.lv=rhel_135-180-133/root
rd.lvm.lv=rhel_135-180-133/swap
rhgb
quiet
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

```

```

-----
14. cpupower frequency-info
analyzing CPU 142:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+advise [advise] never
   enabled         [always] advise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none           511
   max_ptes_shared        256
   max_ptes_swap           64
   pages_to_scan           4096
   scan_sleep_millisecs   10000
-----

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.7 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.7 (Plow)
   system-release  Red Hat Enterprise Linux release 9.7 (Plow)
-----

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel_135--180--133-home xfs   372G  37G  336G  10% /home
-----

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:      Supermicro
   Product:     Super Server
   Product Family: Family
   Serial:      0123456789
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x SK Hynix HMC4AMBRB970N 96 GB 2 rank 8000
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      American Megatrends International, LLC.
   BIOS Version:     1.5b
   BIOS Date:        05/04/2026
   BIOS Revision:    5.35
-----

```

### Compiler Version Notes

C | 502.gcc\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xclearwaterforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xclearwaterforest -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xclearwaterforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmallo
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

502 gcc\_r: icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-fno-strict-aliasing
-L/home/specdev/intel-compilers/compiler/latest/lib
-lqkmalloc

502.gcc_r: -m32 -L/home/specdev/intel-compilers/compiler/2024.2/lib32
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xclearwaterforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/intel-compilers/compiler/latest/lib
-lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2017\_int\_base = 1060

SPECrate®2017\_int\_peak = 1100

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes  
523.xalancbmk\_r: basepeak = yes  
531.deepsjeng\_r: basepeak = yes  
541.leela\_r: basepeak = yes  
  
Fortran benchmarks:  
  
548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-27 06:13:57-0400.  
Report generated on 2026-06-16 17:50:16 by CPU2017 PDF formatter v6716.  
Originally published on 2026-06-16.