



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

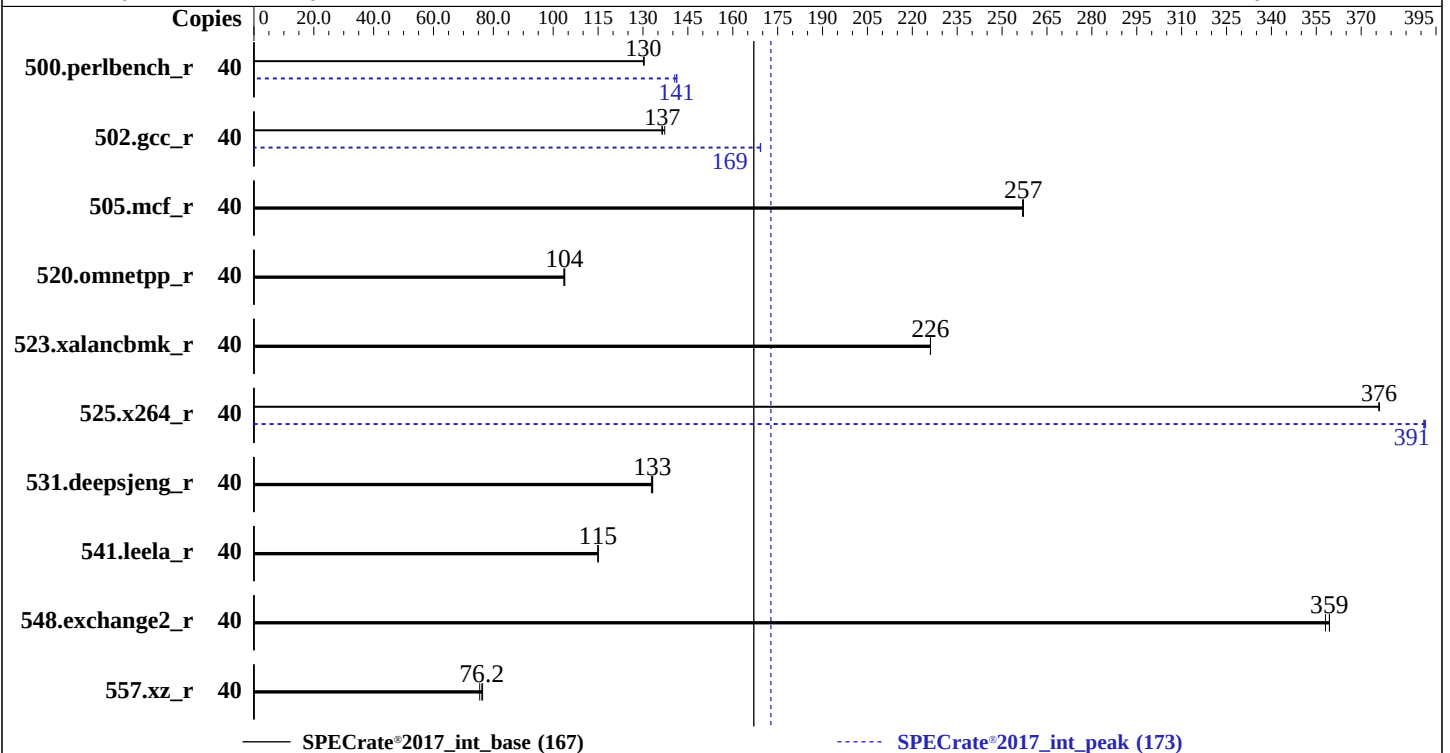

Hardware

CPU Name: Intel Xeon 6513P-B
Max MHz: 3300
Nominal: 2000
Enabled: 20 cores, 1 chip, 2 threads/core
Orderable: 1 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 80 MB I+D on chip per chip
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 2.4 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
C/C++: Version 2024.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Parallel: No
Firmware: Version 6.0.2c released May-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	489	130	<u>489</u>	<u>130</u>	488	130	40	453	141	<u>451</u>	<u>141</u>	451	141
502.gcc_r	40	416	136	<u>415</u>	<u>137</u>	413	137	40	335	169	335	169	<u>335</u>	<u>169</u>
505.mcf_r	40	252	257	251	257	<u>251</u>	<u>257</u>	40	252	257	251	257	<u>251</u>	<u>257</u>
520.omnetpp_r	40	<u>506</u>	<u>104</u>	505	104	507	104	40	<u>506</u>	<u>104</u>	505	104	507	104
523.xalancbmk_r	40	<u>187</u>	<u>226</u>	187	226	187	226	40	<u>187</u>	<u>226</u>	187	226	187	226
525.x264_r	40	<u>186</u>	<u>376</u>	186	376	186	376	40	<u>179</u>	<u>391</u>	179	392	179	391
531.deepsjeng_r	40	<u>344</u>	<u>133</u>	344	133	345	133	40	<u>344</u>	<u>133</u>	344	133	345	133
541.leela_r	40	576	115	576	115	<u>576</u>	<u>115</u>	40	576	115	576	115	<u>576</u>	<u>115</u>
548.exchange2_r	40	293	358	<u>292</u>	<u>359</u>	292	359	40	293	358	<u>292</u>	<u>359</u>	292	359
557.xz_r	40	<u>567</u>	<u>76.2</u>	573	75.4	565	76.4	40	<u>567</u>	<u>76.2</u>	573	75.4	565	76.4

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Adjacent cache line prefetcher set to Disabled

DCU Streamer Prefetch set to Disabled

UPI Power Management set to Enabled

XPT prefetch set to Disabled

Patrol scrub set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Aug 9 22:09:28 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:09:28 up 16 min, 3 users, load average: 0.00, 0.00, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:07 7.00s 1.13s 0.10s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2061649
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2061649
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=40 -c
ic2025.2-lin-graniterapids-rate-20250605.cfg --reportable --iterations 3 --define smt-on --define cores=20
--define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=40 --configfile
ic2025.2-lin-graniterapids-rate-20250605.cfg --reportable --iterations 3 --define smt-on --define cores=20
--define physicalfirst --define invoke_with_interleave --define drop_caches --tune all --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templots/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) 6513P-B
vendor_id       : GenuineIntel
cpu family      : 6
model           : 174
stepping        : 1
microcode       : 0x10002b3
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 20
siblings        : 40
1 physical ids (chips)
40 processors (hardware threads)
physical id 0:  core ids 0-19
physical id 0:  apicids 0-39
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Platform Notes (Continued)

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	40
On-line CPU(s) list:	0-39
Vendor ID:	GenuineIntel
Model name:	INTEL(R) XEON(R) 6513P-B
CPU family:	6
Model:	174
Thread(s) per core:	2
Core(s) per socket:	20
Socket(s):	1
Stepping:	1
CPU(s) scaling MHz:	47%
CPU max MHz:	3300.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
L1d cache:	960 KiB (20 instances)
L1i cache:	1.3 MiB (20 instances)
L2 cache:	40 MiB (20 instances)
L3 cache:	80 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-39
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	960K	12	Data	1	64	1	64
L1i	64K	1.3M	16	Instruction	1	64	1	64
L2	2M	40M	16	Unified	2	2048	1	64
L3	80M	80M	16	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-39

node 0 size: 515439 MB

node 0 free: 514030 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 527810272 kB

10. who -r

run-level 3 Aug 9 21:53

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
virtqemu-wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsiddd gpm grub2-once haveged hv_fcopy_daemon hv_fcopy_uio_daemon hv_kvp_daemon
hv_vss_daemon ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat
libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfs-server
rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd-generate_opts snmpd
snmptrapd strongswan strongswan-starter svnserv systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 virtinterfaced virtlockd virtlogd
virtnetworkd virtnodevdev virtnwfilterd virtsecret virtstoraged

indirect

pcsd systemd-userdbd tftpd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default

root=UUID=6d248515-141f-4b51-9ab1-098f8c06fd0a

splash=silent

resume=/dev/disk/by-uuid/c8ab2e59-fc57-4501-b4d2-6013fcca3e42

mitigations=auto

quiet

security=apparmor

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 20:

current policy: frequency should be within 800 MHz and 3.30 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	2.4T	107G	2.3T	5%	/home

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc
Product: UCSXE-130C-M8-20
Product Family: Cisco Edge Server
Serial: WZP2948A0PE

21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: XE1X0M8.6.0.2c.0.0526261754
BIOS Date: 05/26/2026
BIOS Revision: 5.35

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

502.gcc_r: icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow -fno-strict-aliasing
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmallocc

502.gcc_r: -m32 -L/home/specdev/intel-compilers/compiler/2024.2/lib32
-std=gnu89 -Wl, -z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl, -z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmallocc

557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V3.0-GNR-revA.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS XE130c M8 (Intel Xeon 6513P-B processor)

SPECrate®2017_int_base = 167

SPECrate®2017_int_peak = 173

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V3.0-GNR-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-08-09 22:09:27-0400.

Report generated on 2026-09-23 13:10:38 by CPU2017 PDF formatter v6716.

Originally published on 2026-09-22.