SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2026_int_base =	1.00
SPECspeed®2026_int_energy_base =	1.00
SPECspeed®2026_int_peak =	1.07
SPECspeed®2026_int_energy_peak =	1.08

CPU2026 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

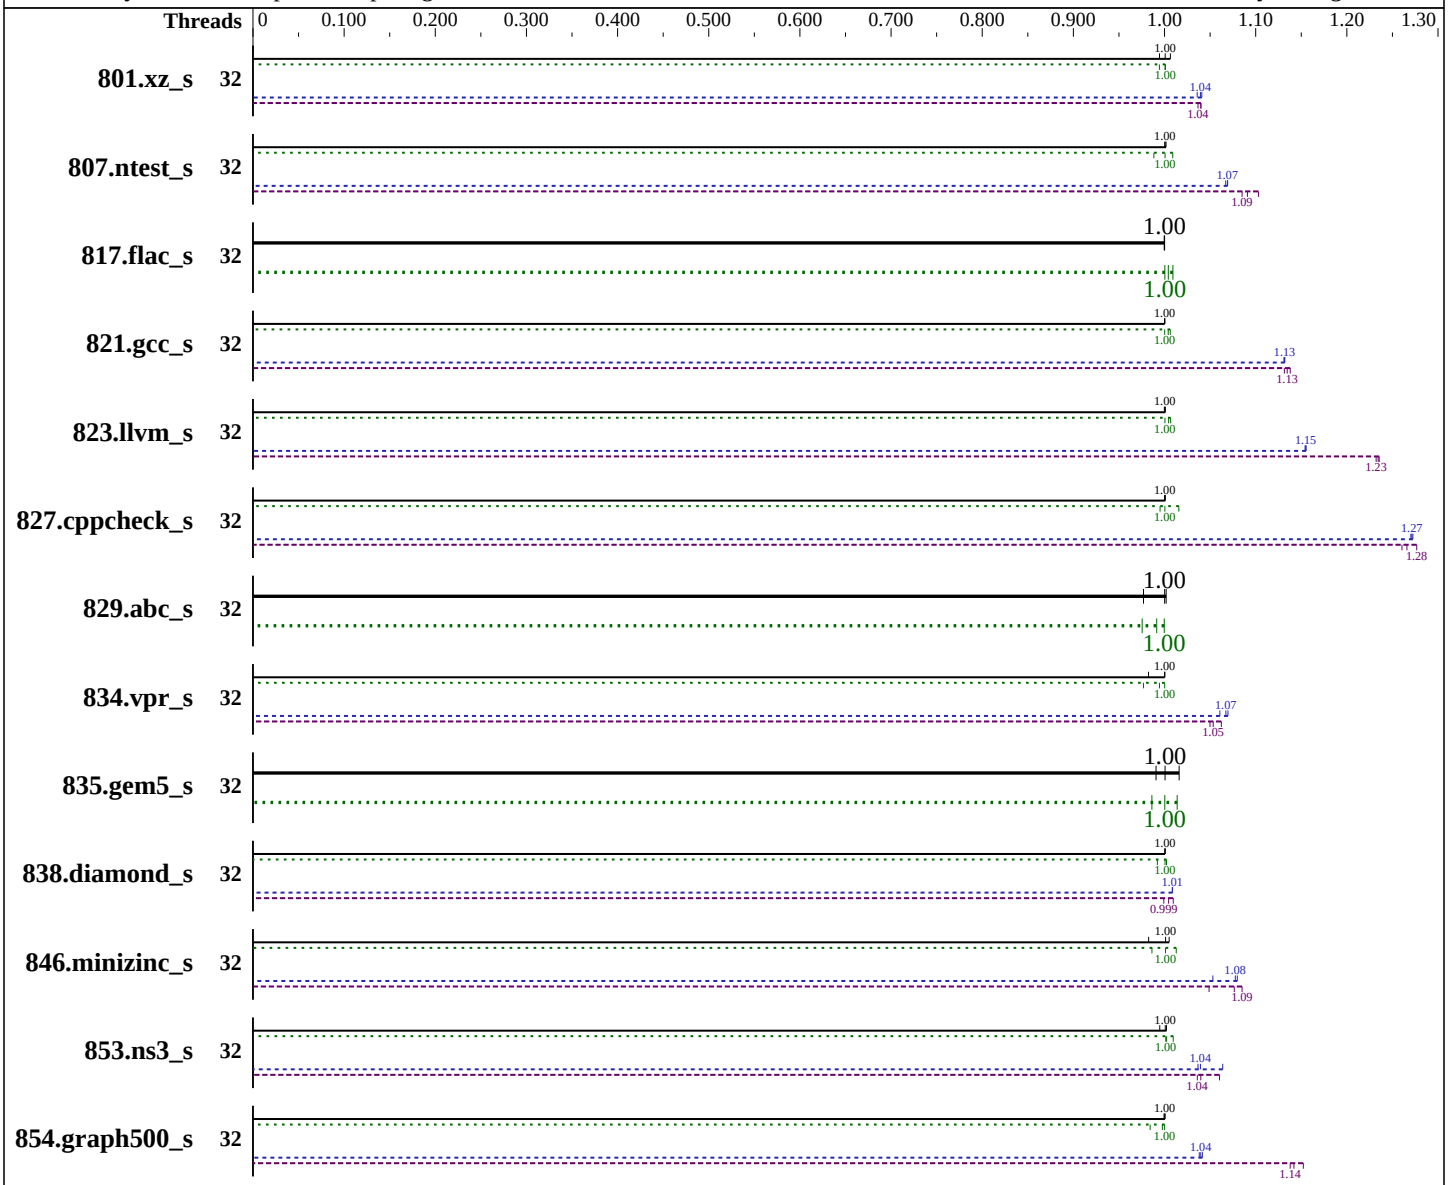

Hardware

CPU Name: Ampere eMAG 8180
Max MHz: 3300
Nominal: 3000
Enabled: 32 cores, 1 chip
Orderable: 1 chips

(Continued on next page)

Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
Compiler: C/C++/Fortran: Version 15.2.0 of GCC
Compiler Category: Community
Firmware: Version 1.12 released Nov-2019
File System: ext4

(Continued on next page)

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A (3.00 GHz Ampere eMAG 8180)

SPECspeed®2026_int_base =	1.00
SPECspeed®2026_int_energy_base =	1.00
SPECspeed®2026_int_peak =	1.07
SPECspeed®2026_int_energy_peak =	1.08

CPU2026 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Hardware (Continued)

Cache L1:	32 KB I + 32 KB D on chip per core
L2:	4 MB I+D on chip per chip (256 KB shared / 2 cores)
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 480 GB SATA SSD
Cooling:	Air
Other:	None

Software (Continued)

System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc v5.3+, commit hash 1972241
Power Management:	OS CPU governor set to "performance"

Power

Max. Power (W):	292.13
Idle Power (W):	77.55
Min. Temperature (C):	20.88
Elevation (m):	60
Line Standard:	120 V / 60 Hz / 1 phase / 2 wire
Provisioning:	Line powered

Power Settings

Management FW:	Version 11.05.111 of Falcon BMC
Memory Mode:	Normal

Power-Relevant Hardware

Power Supply:	1 x 550 W (non-redundant)
Details:	Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane:	N/A
Other Storage:	N/A
Storage Model #s:	1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed:	1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS):	2 / 1
NICs Connected/Speed:	1 @ 1 Gbps
Other HW Model #s:	--

Power Analyzer

Power Analyzer:	cpu-reference-ptd:8000
Hardware Vendor:	Yokogawa
Model:	WT-310
Serial Number:	T11733285
Input Connection:	Serial over USB
Metrology Institute:	NIST
Calibration By:	Yokogawa USA
Calibration Label:	T126622
Calibration Date:	13-Aug-2025
PTDaemon® Version:	1.11.3 (0c074d7d; 2025-10-15)
Setup Description:	Directly connected
Current Ranges Used:	5A
Voltage Range Used:	150V

Temperature Meter

Temperature Meter:	cpu-reference-ptd:9000
Hardware Vendor:	PCSensor
Model:	USB9097+DS18B20
Serial Number:	--
Input Connection:	USB
PTDaemon Version:	1.11.3 (0c074d7d; 2025-10-15)
Setup Description:	In front of SUT front panel primary air inlet

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2026_int_base = 1.00

SPECspeed®2026_int_energy_base = 1.00

SPECspeed®2026_int_peak = 1.07

SPECspeed®2026_int_energy_peak = 1.08

CPU2026 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
801.xz_s	32	587	1.01	82.8	1.00	141	211	594	0.994	83.3	0.994	140	212	**591**	**1.00**	**82.8**	**1.00**	**140**	**207**
807.ntest_s	32	**1139**	**1.00**	**232**	**1.00**	**203**	**264**	1140	1.00	230	1.01	202	263	1138	1.00	235	0.988	206	264
817.flac_s	32	1738	1.00	185	1.00	107	191	1737	1.00	184	1.01	106	182	**1737**	**1.00**	**186**	**1.00**	**107**	**181**
821.gcc_s	32	**2070**	**1.00**	**425**	**1.00**	**205**	**248**	2070	1.00	423	1.00	205	229	2070	1.00	423	1.01	204	242
823.llvm_s	32	1411	1.00	291	1.01	206	236	1410	1.00	291	1.00	207	246	**1410**	**1.00**	**293**	**1.00**	**207**	**235**
827.cppcheck_s	32	**1119**	**1.00**	**243**	**1.00**	**217**	**277**	1118	1.00	239	1.02	214	231	1119	1.00	244	0.995	218	284
829.abc_s	32	851	0.977	71.5	0.975	84.0	93.2	**831**	**1.00**	**69.7**	**1.00**	**83.9**	**92.3**	830	1.00	70.3	0.991	84.8	94.3
834.vpr_s	32	971	0.982	82.0	0.977	84.5	92.3	**954**	**1.00**	**80.1**	**1.00**	**84.0**	**87.6**	954	1.00	80.6	0.994	84.5	87.6
835.gem5_s	32	1150	0.991	98.1	0.986	85.3	87.3	**1138**	**1.00**	**96.7**	**1.00**	**84.9**	**86.9**	1121	1.02	95.4	1.01	85.1	86.7
838.diamond_s	32	1001	1.00	202	0.992	202	265	1000	1.00	200	1.00	200	264	**1000**	**1.00**	**200**	**1.00**	**200**	**266**
846.minizinc_s	32	**669**	**1.00**	**62.6**	**1.00**	**93.6**	**101**	667	1.01	61.9	1.01	92.9	100	682	0.983	63.6	0.986	93.3	101
853.ns3_s	32	**1152**	**1.00**	**99.0**	**1.00**	**86.0**	**98.5**	1151	1.00	98.2	1.01	85.4	95.6	1159	0.995	98.9	1.00	85.4	95.9
854.graph500_s	32	611	0.999	130	0.998	213	284	**611**	**1.00**	**130**	**1.00**	**213**	**287**	611	1.00	132	0.984	216	292

SPECspeed®2026_int_base = 1.00

SPECspeed®2026_int_energy_base = 1.00

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
801.xz_s	32	571	1.04	79.7	1.04	140	207	568	1.04	79.7	1.04	140	210	**569**	**1.04**	**79.9**	**1.04**	**141**	**210**
807.ntest_s	32	1066	1.07	210	1.10	197	245	1068	1.07	213	1.09	199	254	**1066**	**1.07**	**214**	**1.09**	**200**	**238**
817.flac_s	32	1738	1.00	185	1.00	107	191	1737	1.00	184	1.01	106	182	**1737**	**1.00**	**186**	**1.00**	**107**	**181**
821.gcc_s	32	1830	1.13	376	1.13	205	227	**1829**	**1.13**	**375**	**1.13**	**205**	**242**	1829	1.13	374	1.14	204	231
823.llvm_s	32	1221	1.16	237	1.23	194	215	1223	1.15	237	1.24	194	209	**1222**	**1.15**	**238**	**1.23**	**194**	**211**
827.cppcheck_s	32	879	1.27	192	1.27	218	271	**880**	**1.27**	**190**	**1.28**	**216**	**253**	881	1.27	193	1.26	219	285
829.abc_s	32	851	0.977	71.5	0.975	84.0	93.2	**831**	**1.00**	**69.7**	**1.00**	**83.9**	**92.3**	830	1.00	70.3	0.991	84.8	94.3
834.vpr_s	32	892	1.07	75.4	1.06	84.6	87.9	**894**	**1.07**	**76.1**	**1.05**	**85.1**	**89.5**	899	1.06	76.3	1.05	84.9	88.0
835.gem5_s	32	1150	0.991	98.1	0.986	85.3	87.3	**1138**	**1.00**	**96.7**	**1.00**	**84.9**	**86.9**	1121	1.02	95.4	1.01	85.1	86.7
838.diamond_s	32	**992**	**1.01**	**200**	**0.999**	**202**	**262**	992	1.01	198	1.01	200	264	992	1.01	199	1.00	201	265
846.minizinc_s	32	**622**	**1.08**	**57.8**	**1.09**	**93.0**	**101**	636	1.05	59.8	1.05	94.0	102	620	1.08	58.3	1.08	93.9	102
853.ns3_s	32	1084	1.06	93.5	1.06	86.3	97.6	**1109**	**1.04**	**95.7**	**1.04**	**86.3**	**98.6**	1112	1.04	95.4	1.04	85.7	98.1
854.graph500_s	32	**588**	**1.04**	**114**	**1.14**	**194**	**283**	587	1.04	113	1.15	192	253	589	1.04	114	1.14	193	268

SPECspeed®2026_int_peak = 1.07

SPECspeed®2026_int_energy_peak = 1.08

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64/:/usr/lib/:/lib64:/home/mjm/jemalloc/lib"
OMP_STACKSIZE = "120M"
```

General Notes

```
jemalloc is a general purpose malloc(3) implementation that emphasizes
fragmentation avoidance and scalable concurrency support.
```

(Continued on next page)

General Notes (Continued)

```
sources available from https://github.com/jemalloc/jemalloc/tree/1972241
and built via "./configure --with-lg-quantum=3" which used system gcc-14 -O3

This benchmark result is intended to provide perspective on
past power and/or performance using the historical hardware
and/or software described on this result page.

The system as described on this result page was formerly
generally available. At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.
```

Platform Notes

```
 Sysinfo program /home/mjm/RC2/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on emag Mon Feb 23 02:46:39 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
 19. /sys/devices/virtual/dmi/id
 20. dmidecode
 21. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64

------------------------------------------------------------
 2. w
    02:46:39 up 66 days,  3:11,  2 users,  load average: 1.07, 10.11, 21.62
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   mjm              10.13.114.186    28Jan26  2days  0.00s  0.02s sshd: mjm [priv]

------------------------------------------------------------
 3. Username
   From environment variable $USER:  mjm

------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 16691648
   process              128681
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --system --deserialize=66
  SCREEN
  -bin/tcsh
 runcpu --flagsurl=$SPEC/config/flags/gcc.xml -c emag-golden --reportable -n 3 --tune=base,peak --power
    intspeed
```

(Continued on next page)

Platform Notes (Continued)

```
 runcpu --flagsurl $SPEC/config/flags/gcc.xml --configfile emag-golden --reportable --iterations 3 --tune
   base,peak --power --runmode speed --tune base:peak --size refspeed intspeed --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2026.069/templogs/preenv.intspeed.069.0.log --lognum 069.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/RC2

------------------------------------------------------------
6. /proc/cpuinfo
    CPU implementer : 0x50
    CPU architecture: 8
    CPU variant     : 0x3
    CPU part        : 0x000
    CPU revision    : 2
    Features        : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         aarch64
  CPU op-mode(s):                       32-bit, 64-bit
  Byte Order:                           Little Endian
  CPU(s):                               32
  On-line CPU(s) list:                  0-31
  Vendor ID:                            APM
  Model name:                           -
  Model:                                2
  Thread(s) per core:                   1
  Core(s) per socket:                   32
  Socket(s):                            1
  Stepping:                             0x3
  Frequency boost:                      disabled
  CPU(s) scaling MHz:                   100%
  CPU max MHz:                          2911.7639
  CPU min MHz:                          363.9700
  BogoMIPS:                             80.00
  Flags:                                fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
  L1d cache:                            1 MiB (32 instances)
  L1i cache:                            1 MiB (32 instances)
  L2 cache:                             4 MiB (16 instances)
  NUMA node(s):                         1
  NUMA node0 CPU(s):                    0-31
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Mitigation; PTI
  Vulnerability Mmio stale data:    Not affected
  Vulnerability Retbleed:           Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:  Vulnerable
  Vulnerability Spectre v1:         Mitigation; __user pointer sanitization
  Vulnerability Spectre v2:         Vulnerable
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       1M    8 Data            1
     L1i       32K       1M    8 Instruction     1
     L2       256K       4M   32 Unified         2

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-31
  node 0 size: 130403 MB
  node 0 free: 63676 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       133533376 kB

------------------------------------------------------------
10. who -r
  run-level 5 Dec 18 23:35

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled         ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
```

(Continued on next page)

Platform Notes (Continued)

```
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common
               grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi
               open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat
                 systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
               systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
 disabled        console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-networkd-wait-online@
               systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
                    systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                    systemd-time-wait-sync
  generated         openipmi perlbal
  indirect          serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uuidd
 masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0
  root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
  ro
  cma=1024M
  iommu.passthrough=1

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  536870912
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none            8191
  max_ptes_shared          4096
  max_ptes_swap            1024
  pages_to_scan           65536
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
18. Disk information
SPEC is set to: /home/mjm/RC2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  439G  196G  221G  48% /

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        HR330A            7X33CTO1WW
    Product Family: Lenovo ThinkSystem HR330A/HR350A

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 21. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       LENOVO
    BIOS Version:      HVE104N-1.12
    BIOS Date:         11/29/2019
    BIOS Revision:     1.12
    Firmware Revision: 1.7
```

Power Settings Notes

```
OS CPU governor was set using the command:
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base, peak)
------------------------------------------------------------------------------
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base, peak) 827.cppcheck_s(base, peak) 853.ns3_s(base,
       | peak)
------------------------------------------------------------------------------
g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base pass 0, peak pass 1, peak pass 2) 817.flac_s(base pass
       | 0, peak pass 0) 821.gcc_s(base pass 0, peak pass 1, peak pass 2)
       | 823.llvm_s(base pass 0, peak pass 1, peak pass 2) 829.abc_s(base
       | pass 0, peak pass 0) 834.vpr_s(base pass 0, peak pass 1, peak pass
       | 2) 835.gem5_s(base pass 0, peak pass 0) 838.diamond_s(base pass 0,
       | peak pass 1, peak pass 2) 846.minizinc_s(base pass 0, peak pass 1,
       | peak pass 2)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base pass 0, peak pass 1, peak pass 2) 817.flac_s(base pass
       | 0, peak pass 0) 821.gcc_s(base pass 0, peak pass 1, peak pass 2)
       | 823.llvm_s(base pass 0, peak pass 1, peak pass 2) 829.abc_s(base
       | pass 0, peak pass 0) 834.vpr_s(base pass 0, peak pass 1, peak pass
       | 2) 835.gem5_s(base pass 0, peak pass 0) 838.diamond_s(base pass 0,
       | peak pass 1, peak pass 2) 846.minizinc_s(base pass 0, peak pass 1,
       | peak pass 2)
------------------------------------------------------------------------------
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base pass 0, peak pass 1, peak pass 2) 817.flac_s(base pass
       | 0, peak pass 0) 821.gcc_s(base pass 0, peak pass 1, peak pass 2)
       | 823.llvm_s(base pass 0, peak pass 1, peak pass 2) 829.abc_s(base
       | pass 0, peak pass 0) 834.vpr_s(base pass 0, peak pass 1, peak pass
       | 2) 835.gem5_s(base pass 0, peak pass 0) 838.diamond_s(base pass 0,
       | peak pass 1, peak pass 2) 846.minizinc_s(base pass 0, peak pass 1,
       | peak pass 2)
------------------------------------------------------------------------------
g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base pass 0, peak pass 1, peak pass 2) 817.flac_s(base pass
       | 0, peak pass 0) 821.gcc_s(base pass 0, peak pass 1, peak pass 2)
       | 823.llvm_s(base pass 0, peak pass 1, peak pass 2) 829.abc_s(base
       | pass 0, peak pass 0) 834.vpr_s(base pass 0, peak pass 1, peak pass
       | 2) 835.gem5_s(base pass 0, peak pass 0) 838.diamond_s(base pass 0,
       | peak pass 1, peak pass 2) 846.minizinc_s(base pass 0, peak pass 1,
       | peak pass 2)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

Benchmarks using both C and C++:
g++ gcc

Base Portability Flags

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-mabi=lp64 -std=c18 -g -O3 -ffast-math -mcpu=native -flto=16
-fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:

807.ntest_s: `-mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib -ljemalloc`

827.cppcheck_s: `-mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native -flto=16 -pthread -L/home/mjm/jemalloc/lib -ljemalloc`

853.ns3_s: `-mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc`

Benchmarks using both C and C++:

801.xz_s: `-mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math -mcpu=native -flto=16 -pthread -L/home/mjm/jemalloc/lib -ljemalloc`

817.flac_s: `Same as 801.xz_s`

821.gcc_s: `-mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc`

823.llvm_s: `Same as 801.xz_s`

829.abc_s: `Same as 821.gcc_s`

834.vpr_s: `Same as 821.gcc_s`

835.gem5_s: `Same as 801.xz_s`

838.diamond_s: `Same as 801.xz_s`

846.minizinc_s: `Same as 801.xz_s`

Peak Compiler Invocation

C benchmarks:
`gcc`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
g++

Benchmarks using both C and C++:
g++ gcc

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-mabi=lp64 -std=c18 -fprofile-generate -fprofile-use -g -Ofast
-mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

C++ benchmarks:

807.ntest_s: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP
-L/home/mjm/jemalloc/lib -ljemalloc

827.cppcheck_s: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -pthread
-L/home/mjm/jemalloc/lib -ljemalloc

853.ns3_s: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc

Benchmarks using both C and C++:

801.xz_s: -mabi=lp64 -std=c++17 -std=c18 -fprofile-generate
-fprofile-use -g -Ofast -mcpu=native -flto=16 -pthread
-L/home/mjm/jemalloc/lib -ljemalloc

817.flac_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

821.gcc_s: `-mabi=lp64 -std=c++17 -std=c18 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc`

823.llvm_s: `Same as 801.xz_s`

829.abc_s: `basepeak = yes`

834.vpr_s: `Same as 821.gcc_s`

835.gem5_s: `basepeak = yes`

838.diamond_s: `Same as 801.xz_s`

846.minizinc_s: `Same as 801.xz_s`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.xml`

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.903.0 on 2026-02-22 21:46:37-0500.
Report generated on 2026-05-04 23:26:39 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.