SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6787P 2.0 GHz)

SPECrate®2026_fp_base = 585

SPECrate®2026_fp_peak = 602

CPU2026 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2026
Hardware Availability: Feb-2025
Software Availability: Jan-2026

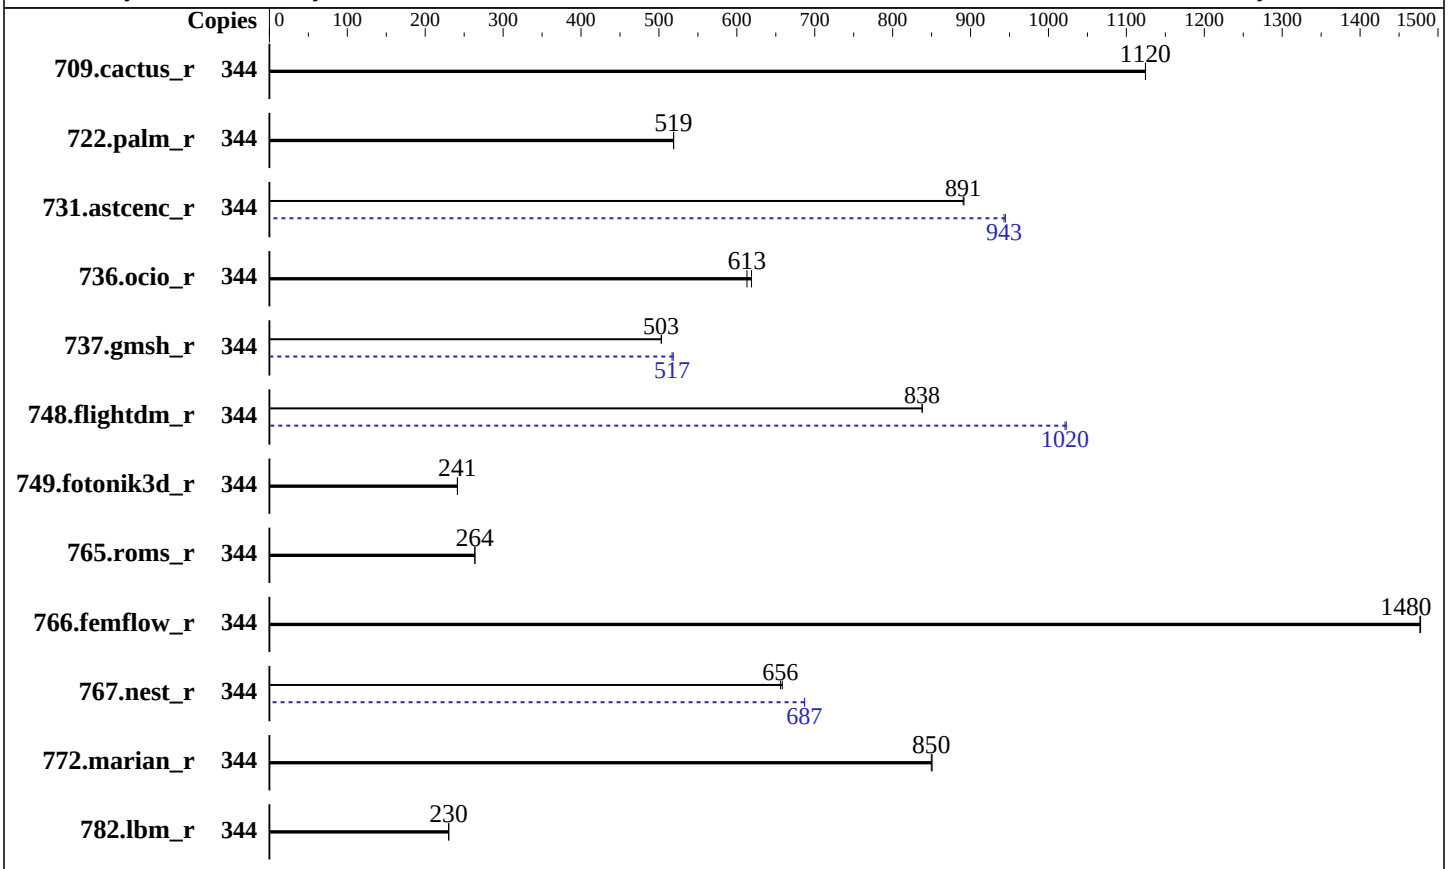

Hardware

CPU Name:	Intel Xeon 6787P
Max MHz:	3800
Nominal:	2000
Enabled:	172 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 960 GB NVMe SSD
Cooling:	Air
Other:	None

Software

OS:	Ubuntu 22.04.5 LTS 5.15.0-48-generic
Compiler:	C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.3 of Intel Fortran Compiler for Linux;
Compiler Category:	Vendor
Firmware:	Version 6.0.2.105 released Jan-2026
File System:	xfs
System State:	Run level 3 (add definition here)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6787P 2.0 GHz)

SPECrate®2026_fp_base = 585

SPECrate®2026_fp_peak = 602

CPU2026 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2026
Hardware Availability: Feb-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	344	262	1120	**262**	**1120**			344	262	1120	**262**	**1120**		
722.palm_r	344	**875**	**519**	875	519			344	**875**	**519**	875	519		
731.astcenc_r	344	324	892	**324**	**891**			344	306	945	**306**	**943**		
736.ocio_r	344	486	619	**491**	**613**			344	486	619	**491**	**613**		
737.gmsh_r	344	**314**	**503**	314	503			344	305	518	**305**	**517**		
748.flightdm_r	344	**294**	**838**	294	838			344	**241**	**1020**	241	1020		
749.fotonik3d_r	344	1647	241	**1648**	**241**			344	1647	241	**1648**	**241**		
765.roms_r	344	2054	264	**2054**	**264**			344	2054	264	**2054**	**264**		
766.femflow_r	344	342	1480	**342**	**1480**			344	342	1480	**342**	**1480**		
767.nest_r	344	**416**	**656**	414	658			344	**397**	**687**	397	687		
772.marian_r	344	639	851	**639**	**850**			344	639	851	**639**	**850**		
782.lbm_r	344	**857**	**230**	856	230			344	**857**	**230**	856	230		

SPECrate®2026_fp_base = 585

SPECrate®2026_fp_peak = 602

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026.902/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Sub NUMA clustering set to Enabled
Hardware prefetcher set to Enabled
Adjacent cache line prefetcher set to Disabled
Enhanced CPU Performance set to Auto

Sysinfo program /home/cpu2026.902/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on ubuntu2204 Wed Feb  4 04:14:32 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.14)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 5.15.0-48-generic #54-Ubuntu SMP Fri Aug 26 13:26:29 UTC 2022 x86_64

------------------------------------------------------------
2. w
   04:14:32 up  7:36,  1 user,  load average: 130.64, 280.62, 314.82
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                22:37    5:36m  2.19s  0.05s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 132018288
  process              4125115
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 -bash
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
   ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
   ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
   --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.012/templogs/preenv.fprate.012.0.log --lognum 012.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026.902
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 86
    siblings        : 172
    2 physical ids (chips)
    344 processors (hardware threads)
    physical id 0: core ids 0-42,64-106
    physical id 1: core ids 0-42,64-106
    physical id 0: apicids 0-85,128-213
    physical id 1: apicids 256-341,384-469
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          344
  On-line CPU(s) list:             0-343
  Vendor ID:                       GenuineIntel
  Model name:                      Intel(R) Xeon(R) 6787P
  CPU family:                      6
  Model:                           173
  Thread(s) per core:              2
  Core(s) per socket:              86
  Socket(s):                       2
  Stepping:                        1
  CPU max MHz:                     3800.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4000.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
```

(Continued on next page)

Platform Notes (Continued)

```
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                     invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                     vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                       erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                     xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                     avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                      hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                    tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                            arch_capabilities
  Virtualization:                   VT-x
  L1d cache:                        8.1 MiB (172 instances)
  L1i cache:                        10.8 MiB (172 instances)
  L2 cache:                         344 MiB (172 instances)
  L3 cache:                         672 MiB (2 instances)
  NUMA node(s):                     4
  NUMA node0 CPU(s):                0-42,172-214
  NUMA node1 CPU(s):                43-85,215-257
  NUMA node2 CPU(s):                86-128,258-300
  NUMA node3 CPU(s):                129-171,301-343
  Vulnerability Itlb multihit:      Not affected
  Vulnerability L1tf:               Not affected
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
  Vulnerability Mmio stale data:    Not affected
  Vulnerability Retbleed:           Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     8.1M   12 Data            1     64        1             64
     L1i       64K    10.8M   16 Instruction     1     64        1             64
     L2         2M     344M   16 Unified         2   2048        1             64
     L3       336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42,172-214
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 size: 257321 MB
  node 0 free: 236967 MB
  node 1 cpus: 43-85,215-257
  node 1 size: 258027 MB
  node 1 free: 238476 MB
  node 2 cpus: 86-128,258-300
  node 2 size: 258027 MB
  node 2 free: 238288 MB
  node 3 cpus: 129-171,301-343
  node 3 size: 258016 MB
  node 3 free: 238584 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056146332 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 3 12:38

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.14)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * docker.service        loaded failed failed Docker Application Container Engine
  * ndctl-monitor.service loaded failed failed Ndctl Monitor Daemon
  * docker.socket         loaded failed failed Docker Socket for the API

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
 enabled         ModemManager apparmor binfmt-support blk-availability cloud-config cloud-final cloud-init
                 cloud-init-local console-setup containerd cron dmesg docker e2scrub_reap finalrd getty@
                  gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor
                   lxd-agent multipathd ndctl-monitor networkd-dispatcher nvmefc-boot-connections
                nvmf-autoconnect open-iscsi open-vm-tools pollinate rpcbind rsyslog secureboot-db setvtrgb
                 snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
```

(Continued on next page)

Platform Notes (Continued)

```
                systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades
                    vgauth xpum
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                    systemd-time-wait-sync upower xpum_rest
  generated        apport kexec kexec-load openipmi
  indirect         uuidd
  masked          cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot nfs-common rc rcS
                    screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-48-generic
  root=UUID=db663766-6856-42f5-b1ca-4efa8e14e528
  ro

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.5 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2026.902
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/nvme3n1p26 xfs   731G  214G  518G  30% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-210C-M8
    Serial:         FCH284272D6

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
    16x NO DIMM NO DIMM


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Cisco Systems, Inc.
   BIOS Version:      X210M8.6.0.2.105.0108262338
   BIOS Date:         01/08/2026
   BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
        | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
        | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
        | peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.astcenc_r: -DSPEC_LP64
736.ocio_r: -DSPEC_LP64
737.gmsh_r: -DSPEC_LP64 -fno-associative-math
748.flightdm_r: -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

Fortran benchmarks:
-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both C and C++:
`icpx icx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

782.lbm_r: `basepeak = yes`

C++ benchmarks:

731.astcenc_r: `-m64 -std=c++17 -Wl,-z,muldefs -fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xHost`(pass 1)
`-ffp-model=fast -xgraniterapids`(pass 2) `-flto`
`-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3`
`-mfpmath=sse -funroll-loops`
`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

736.ocio_r: `basepeak = yes`

748.flightdm_r: `Same as 731.astcenc_r`

(Continued on next page)

Peak Optimization Flags (Continued)

766.femflow_r: `basepeak = yes`

767.nest_r: `Same as 731.astcenc_r`

772.marian_r: `basepeak = yes`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `basepeak = yes`

Benchmarks using both C and C++:

709.cactus_r: `basepeak = yes`

737.gmsh_r: `-m64 -std=c++17 -std=c18 -Wl,-z,muldefs`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xHost`(pass 1)
`-ffp-model=fast -xgraniterapids`(pass 2) `-flto`
`-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3`
`-mfpmath=sse -funroll-loops`
`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html`
`http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-V1.2-GNR-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml`
`http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-V1.2-GNR-revE.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 23:14:31-0500.
Report generated on 2026-05-11 16:38:33 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.