SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECspeed®2026_fp_base = 18.6

SPECspeed®2026_fp_peak = 18.6

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Jan-2025
Software Availability: Jan-2026

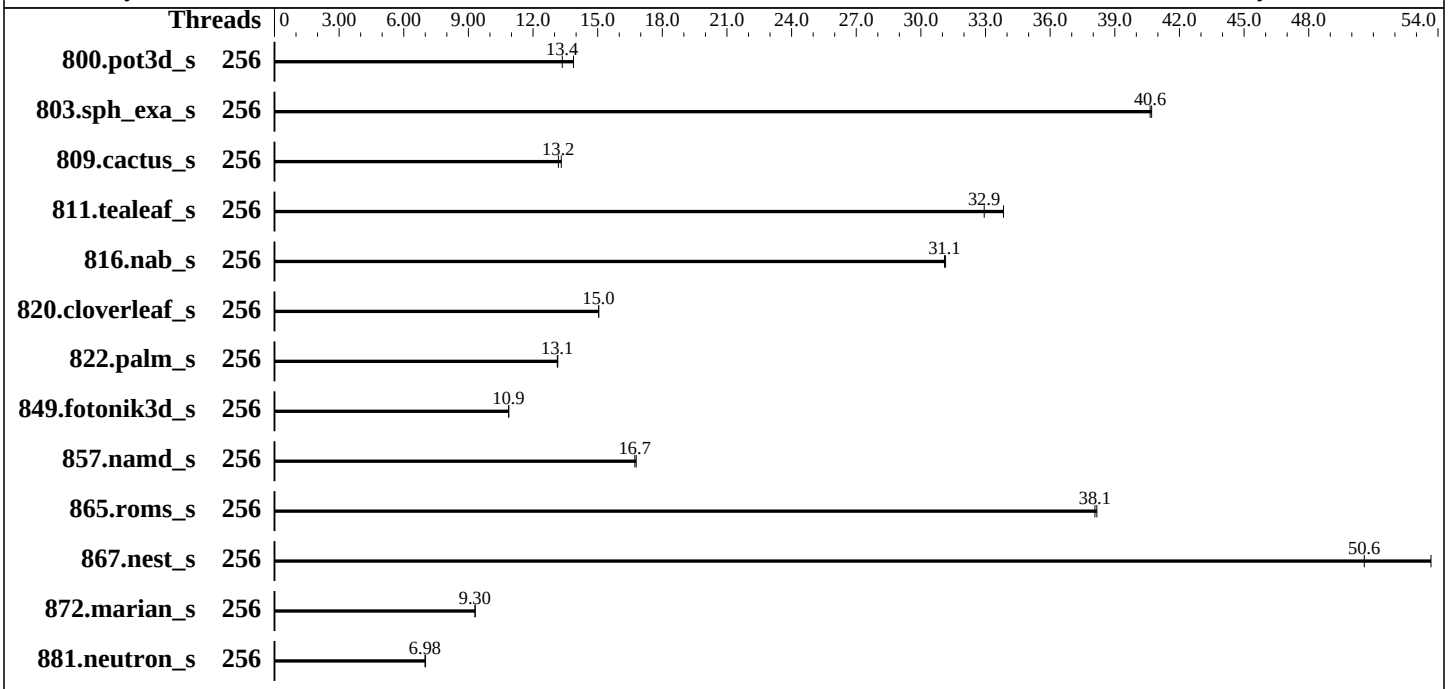

Hardware

CPU Name:	AMD EPYC 9755
Max MHz:	4100
Nominal:	2700
Enabled:	256 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	150 GB on tmpfs
Cooling:	DLC
Other:	None

Software

OS:	Ubuntu 24.04.1 LTS 6.8.0-57-generic
Compiler:	C/C++: Version 5.1.0 of AOCC Fortran: Flang v22
Compiler Category:	Vendor
Firmware:	Version 1.5.3 released Oct-2025
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECspeed®2026_fp_base = 18.6

SPECspeed®2026_fp_peak = 18.6

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Jan-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	256	48.5	13.9	**50.4**	**13.4**			256	48.5	13.9	**50.4**	**13.4**		
803.sph_exa_s	256	30.4	40.7	**30.5**	**40.6**			256	30.4	40.7	**30.5**	**40.6**		
809.cactus_s	256	**85.2**	**13.2**	84.3	13.3			256	**85.2**	**13.2**	84.3	13.3		
811.tealeaf_s	256	16.5	33.8	**16.9**	**32.9**			256	16.5	33.8	**16.9**	**32.9**		
816.nab_s	256	36.2	31.1	**36.2**	**31.1**			256	36.2	31.1	**36.2**	**31.1**		
820.cloverleaf_s	256	57.0	15.0	**57.0**	**15.0**			256	57.0	15.0	**57.0**	**15.0**		
822.palm_s	256	93.4	13.1	**93.6**	**13.1**			256	93.4	13.1	**93.6**	**13.1**		
849.fotonik3d_s	256	60.7	10.9	**60.7**	**10.9**			256	60.7	10.9	**60.7**	**10.9**		
857.namd_s	256	**86.8**	**16.7**	86.5	16.8			256	**86.8**	**16.7**	86.5	16.8		
865.roms_s	256	28.6	38.2	**28.6**	**38.1**			256	28.6	38.2	**28.6**	**38.1**		
867.nest_s	256	**42.7**	**50.6**	40.2	53.7			256	**42.7**	**50.6**	40.2	53.7		
872.marian_s	256	**116**	**9.30**	116	9.32			256	**116**	**9.30**	116	9.32		
881.neutron_s	256	116	7.01	**117**	**6.98**			256	116	7.01	**117**	**6.98**		

SPECspeed®2026_fp_base = **18.6**

SPECspeed®2026_fp_peak = **18.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

(Continued on next page)

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib:/mnt
     /ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS Settings:
                    Logical Processor : Disabled
             Virtualization Technology : Disabled

                       System Profile : Custom
                  CPU Power Management : Maximum Performance
                              C-States : Disabled
                   Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link Power Management : Disabled
      Periodic Directory Rinse Tuning : Blended
                   Determinism Control : Manual
                    Determinism Slider : Power Determinism
                        Optimizer Mode : Enabled
  Algorithm Performance Boost Disable : Enabled
               ApbDis Fixed DF P-State : P0
                   Adaptive Allocation : Enabled
                    Dram Refresh Delay : Performance
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on M772501-M7725 Sat Feb  7 12:30:12 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-57-generic #59-Ubuntu SMP PREEMPT_DYNAMIC Sat Mar 15 17:40:59 UTC 2025 x86_64

------------------------------------------------------------
2. w
   12:30:12 up  1:01,  1 user,  load average: 0.32, 0.08, 0.03
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                12:27   36.00s  2.18s  1.12s /bin/bash
  ./amd_speed_aocc510_flang22_znver5_A1.sh

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              6189143
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

 ------------------------------------------------------------
 5. sysinfo process ancestry
  /sbin/init
  /bin/login -p --
  -bash
  /bin/bash /home/DellFiles/bin/DELL_speed.sh
  /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
  /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
  /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
    html,pdf,txt
  python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
  /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
  runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
    DL-VERS=7.0_T01 --output_format html,pdf,txt fpspeed
  runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
    DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode speed --tune base --size
    test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /mnt/ramdisk/cpu2026rc2

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : AMD EPYC 9755 128-Core Processor
     vendor_id       : AuthenticAMD
     cpu family      : 26
     model           : 2
     stepping        : 1
     microcode       : 0xb00215a
```

(Continued on next page)

Platform Notes (Continued)

```
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 128
     siblings        : 128
     2 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 1: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
     64-471,480-487,496-503
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               256
   On-line CPU(s) list:                  0-255
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       AMD
   Model name:                           AMD EPYC 9755 128-Core Processor
   BIOS Model name:                    AMD EPYC 9755 128-Core Processor                CPU @ 2.7GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   1
   Core(s) per socket:                   128
   Socket(s):                            2
   Stepping:                             1
   BogoMIPS:                             5391.48
   Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                      rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                     extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
```

(Continued on next page)

Platform Notes (Continued)

```
                                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                     cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                     perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                     ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                       smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                     xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                    pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                      vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                      movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                                             flush_l1d debug_swap
  L1d cache:                                 12 MiB (256 instances)
  L1i cache:                                 8 MiB (256 instances)
  L2 cache:                                  256 MiB (256 instances)
  L3 cache:                                  1 GiB (32 instances)
  NUMA node(s):                              2
  NUMA node0 CPU(s):                         0-127
  NUMA node1 CPU(s):                         128-255
  Vulnerability Gather data sampling:        Not affected
  Vulnerability Itlb multihit:               Not affected
  Vulnerability L1tf:                        Not affected
  Vulnerability Mds:                         Not affected
  Vulnerability Meltdown:                    Not affected
  Vulnerability Mmio stale data:             Not affected
  Vulnerability Reg file data sampling:      Not affected
  Vulnerability Retbleed:                    Not affected
  Vulnerability Spec rstack overflow:        Not affected
  Vulnerability Spec store bypass:           Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:                  Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                             disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                       Not affected
  Vulnerability Tsx async abort:             Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K      12M   12 Data            1    64        1             64
      L1i       32K       8M    8 Instruction     1    64        1             64
      L2         1M     256M   16 Unified         2  1024        1             64
      L3        32M       1G   16 Unified         3 32768        1             64

 --------------------------------------------------------------
```


(Continued on next page)

Platform Notes (Continued)

```
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0-127
   node 0 size: 773358 MB
   node 0 free: 771359 MB
   node 1 cpus: 128-255
   node 1 size: 774001 MB
   node 1 free: 758801 MB
   node distances:
   node   0   1
     0:  10  32
     1:  32  10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       1584496868 kB

 ------------------------------------------------------------
 10. who -r
   run-level 5 Feb 7 11:28

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
   Default Target  Status
   graphical       degraded

 ------------------------------------------------------------
 12. Failed units, from systemctl list-units --state=failed
     UNIT                   LOAD   ACTIVE SUB    DESCRIPTION
   * cxl-monitor.service    loaded failed failed CXL Monitor Daemon
   * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
   Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
           ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
           SUB    -> The low-level unit activation state, values depend on unit type.
   2 loaded units listed.

 ------------------------------------------------------------
 13. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron cxl-monitor dmesg e2scrub_reap finalrd getty@
                    gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor
                    multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                    setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                    systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                    ufw vgauth
```

(Continued on next page)

Platform Notes (Continued)

```
   enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
   disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator
                systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                    systemd-time-wait-sync upower
   indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/vmlinuz-6.8.0-57-generic
   root=/dev/mapper/ubuntu--vg-ubuntu--lv
   ro

------------------------------------------------------------
15. cpupower frequency-info
   analyzing CPU 120:
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes
       Boost States: 0
       Total States: 3
       Pstate-P0:  2700MHz

------------------------------------------------------------
16. tuned-adm active
   Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           0
   vm.compaction_proactiveness        20
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                      8
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
   vm.nr_hugepages                     0
   vm.nr_hugepages_mempolicy           0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  150G   11G  140G   7% /mnt/ramdisk

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge M7725
    Product Family: PowerEdge
    Serial:         M772501

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
  Memory:
    1x 80CE000080CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
    23x 80CE000080CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.5.3
    BIOS Date:         10/29/2025
    BIOS Revision:     1.5
```

Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
        | 872.marian_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

Fortran benchmarks:
```
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp
```

Base Other Flags

C benchmarks:
```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using both C and C++:
```
-Wno-return-type -Wno-unused-command-line-argument
```

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: `basepeak = yes`

816.nab_s: `basepeak = yes`

881.neutron_s: `basepeak = yes`

C++ benchmarks:

803.sph_exa_s: `basepeak = yes`

857.namd_s: `basepeak = yes`

867.nest_s: `basepeak = yes`

872.marian_s: `basepeak = yes`

Fortran benchmarks:

800.pot3d_s: `basepeak = yes`

820.cloverleaf_s: `basepeak = yes`

822.palm_s: `basepeak = yes`

849.fotonik3d_s: `basepeak = yes`

865.roms_s: `basepeak = yes`

Benchmarks using both C and C++:

809.cactus_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2026/results/flags/aocc-flags.html`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2026/results/flags/aocc-flags.xml`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-07 13:30:11-0500.
Report generated on 2026-05-04 23:32:18 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.