# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_fp_base = 17.9

SPECspeed®2026_fp_peak = 17.9

**CPU2026 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Feb-2026
**Hardware Availability:** Jan-2025
**Software Availability:** Jan-2026

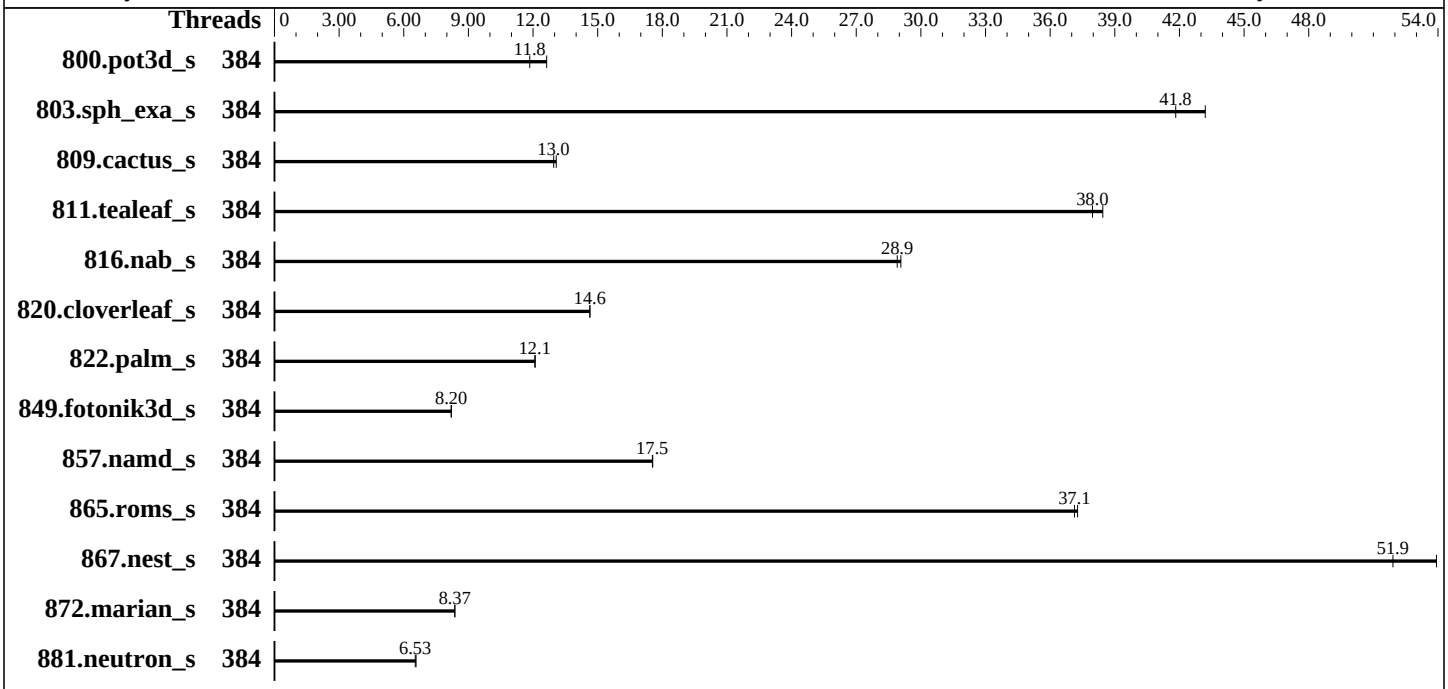


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9965 |
| Max MHz: | 3700 |
| Nominal: | 2250 |
| Enabled: | 384 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 384 MB I+D on chip per chip, 32 MB shared / 16 cores |
| Other: | None |
| Memory: | 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 350 GB on tmpfs |
| Cooling: | DLC |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Ubuntu 24.04.1 LTS 6.8.0-57-generic |
| Compiler: | C/C++: Version 5.1.0 of AOCC Fortran: Flang v22 |
| Compiler Category: | Vendor |
| Firmware: | Version 1.5.3 released Oct-2025 |
| File System: | tmpfs |
| System State: | Run level 5 (graphical multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_fp_base = 17.9

SPECspeed®2026_fp_peak = 17.9

**CPU2026 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Feb-2026
**Hardware Availability:** Jan-2025
**Software Availability:** Jan-2026

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 800.pot3d_s | 384 | 53.3 | 12.6 | **56.8** | **11.8** | | | 384 | 53.3 | 12.6 | **56.8** | **11.8** | | |
| 803.sph_exa_s | 384 | 28.7 | 43.2 | **29.6** | **41.8** | | | 384 | 28.7 | 43.2 | **29.6** | **41.8** | | |
| 809.cactus_s | 384 | **86.6** | **13.0** | 85.8 | 13.1 | | | 384 | **86.6** | **13.0** | 85.8 | 13.1 | | |
| 811.tealeaf_s | 384 | **14.7** | **38.0** | 14.5 | 38.4 | | | 384 | **14.7** | **38.0** | 14.5 | 38.4 | | |
| 816.nab_s | 384 | 38.7 | 29.1 | **39.0** | **28.9** | | | 384 | 38.7 | 29.1 | **39.0** | **28.9** | | |
| 820.cloverleaf_s | 384 | 58.5 | 14.6 | **58.5** | **14.6** | | | 384 | 58.5 | 14.6 | **58.5** | **14.6** | | |
| 822.palm_s | 384 | 101 | 12.1 | **102** | **12.1** | | | 384 | 101 | 12.1 | **102** | **12.1** | | |
| 849.fotonik3d_s | 384 | **80.5** | **8.20** | 80.4 | 8.20 | | | 384 | **80.5** | **8.20** | 80.4 | 8.20 | | |
| 857.namd_s | 384 | 82.7 | 17.6 | **82.8** | **17.5** | | | 384 | 82.7 | 17.6 | **82.8** | **17.5** | | |
| 865.roms_s | 384 | **29.4** | **37.1** | 29.2 | 37.3 | | | 384 | **29.4** | **37.1** | 29.2 | 37.3 | | |
| 867.nest_s | 384 | **41.6** | **51.9** | 40.1 | 53.9 | | | 384 | **41.6** | **51.9** | 40.1 | 53.9 | | |
| 872.marian_s | 384 | **129** | **8.37** | 129 | 8.37 | | | 384 | **129** | **8.37** | 129 | 8.37 | | |
| 881.neutron_s | 384 | **125** | **6.53** | 124 | 6.57 | | | 384 | **125** | **6.53** | 124 | 6.57 | | |

**SPECspeed®2026_fp_base = 17.9**

**SPECspeed®2026_fp_peak = 17.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib:/mnt
     /ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
 Benchmark run from a 350 GB ramdisk created with the cmd: "mount -t tmpfs -o size=350G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
 BIOS Settings:
            Virtualization Technology : Disabled
                       System Profile : Custom
                  CPU Power Management : Maximum Performance
                              C-States : Disabled
                   Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link Power Management : Disabled
      Periodic Directory Rinse Tuning : Blended
                   Determinism Control : Manual
                    Determinism Slider : Power Determinism
                        Optimizer Mode : Enabled
  Algorithm Performance Boost Disable : Enabled
               ApbDis Fixed DF P-State : P0
                   Adaptive Allocation : Enabled
                    Dram Refresh Delay : Performance

 Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
```

**(Continued on next page)**

## Platform Notes (Continued)

```
running on M772501-M7725 Fri Feb  6 02:26:12 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-57-generic #59-Ubuntu SMP PREEMPT_DYNAMIC Sat Mar 15 17:40:59 UTC 2025 x86_64

------------------------------------------------------------
2. w
   02:26:12 up  1:38,  1 user,  load average: 217.95, 104.29, 65.95
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
```


**(Continued on next page)**

## Platform Notes (Continued)

```
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6187506
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 tmux new -s 2026speed
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
   html,pdf,txt
 python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
 /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
 runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html,pdf,txt fpspeed
 runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode speed --tune base --size
   test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101054
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 192
    siblings        : 384
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     2 physical ids (chips)
     768 processors (hardware threads)
     physical id 0: core ids 0-191
     physical id 1: core ids 0-191
     physical id 0: apicids 0-383
     physical id 1: apicids 512-895
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               768
   On-line CPU(s) list:                  0-767
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       AMD
   Model name:                           AMD EPYC 9965 192-Core Processor
   BIOS Model name:                    AMD EPYC 9965 192-Core Processor                CPU @ 2.2GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   192
   Socket(s):                            2
   Stepping:                             0
   BogoMIPS:                             4493.45
   Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                      rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                     extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                      sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                      cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                      perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                     ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                        smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                     avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                      xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                     pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                                    vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                  avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                                           flush_l1d debug_swap
  L1d cache:                               18 MiB (384 instances)
  L1i cache:                               12 MiB (384 instances)
  L2 cache:                                384 MiB (384 instances)
  L3 cache:                                768 MiB (24 instances)
  NUMA node(s):                            2
  NUMA node0 CPU(s):                       0-191,384-575
  NUMA node1 CPU(s):                       192-383,576-767
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Not affected
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                         always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                     Not affected
  Vulnerability Tsx async abort:           Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      18M   12 Data            1    64        1             64
     L1i       32K      12M    8 Instruction     1    64        1             64
     L2         1M     384M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-191,384-575
  node 0 size: 773059 MB
  node 0 free: 769105 MB
  node 1 cpus: 192-383,576-767
  node 1 size: 773891 MB
  node 1 free: 760517 MB
  node distances:
  node   0   1
    0:  10  32
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584077928 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 6 00:47

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * cxl-monitor.service   loaded failed failed CXL Monitor Daemon
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
  Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
  2 loaded units listed.

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron cxl-monitor dmesg e2scrub_reap finalrd getty@
                   gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor
                   multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                   setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                   ufw vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  BOOT_IMAGE=/vmlinuz-6.8.0-57-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 703:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  350G   11G  340G   3% /mnt/ramdisk

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge M7725
    Product Family: PowerEdge
    Serial:         M772501

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x 80CE000080CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
    23x 80CE000080CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.5.3
   BIOS Date:         10/29/2025
   BIOS Revision:     1.5
```

## Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
        | 872.marian_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

## Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

## Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-return-type -Wno-unused-command-line-argument

## Peak Optimization Flags

C benchmarks:

811.tealeaf_s: basepeak = yes

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: basepeak = yes

857.namd_s: basepeak = yes

**(Continued on next page)**

# Peak Optimization Flags (Continued)

867.nest_s: `basepeak = yes`

872.marian_s: `basepeak = yes`

Fortran benchmarks:

800.pot3d_s: `basepeak = yes`

820.cloverleaf_s: `basepeak = yes`

822.palm_s: `basepeak = yes`

849.fotonik3d_s: `basepeak = yes`

865.roms_s: `basepeak = yes`

Benchmarks using both C and C++:

809.cactus_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2026/results/flags/aocc-flags.html`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2026/results/flags/aocc-flags.xml`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2026 v0.902.0 on 2026-02-06 03:26:11-0500.
Report generated on 2026-05-04 23:32:18 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.