SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECspeed®2026_int_base =	4.05
SPECspeed®2026_int_energy_base =	1.32
SPECspeed®2026_int_peak =	4.09
SPECspeed®2026_int_energy_peak =	1.34

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Nov-2025

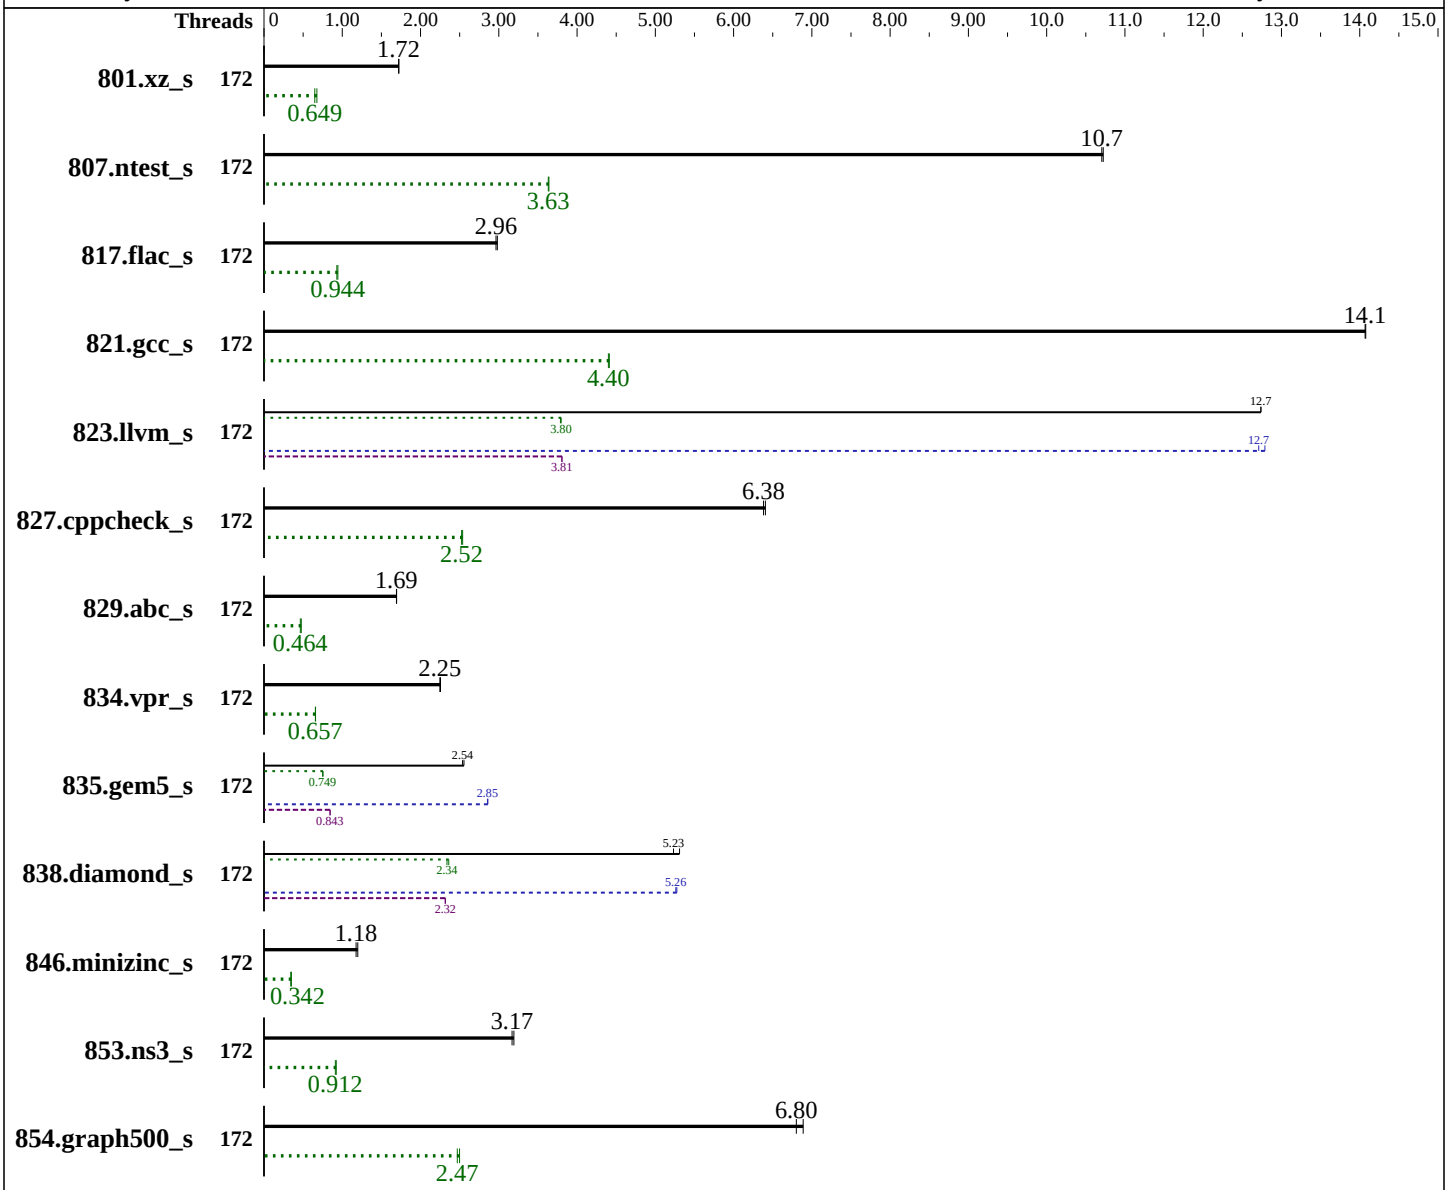

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips
Orderable: 1,2 chips

(Continued on next page)

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default

(Continued on next page)

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECspeed®2026_int_base =	4.05
SPECspeed®2026_int_energy_base =	1.32
SPECspeed®2026_int_peak =	4.09
SPECspeed®2026_int_energy_peak =	1.34

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Nov-2025

Hardware (Continued)

Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 4800)
Storage:	120 GB on tmpfs
Cooling:	Air
Other:	None

Software (Continued)

Compiler:	C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Version 1.6.4 released Nov-2025
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS and OS set to balanced performance

Power

Max. Power (W):	769.6
Idle Power (W):	180.55
Min. Temperature (C):	21.50
Elevation (m):	255
Line Standard:	220 V / 50 Hz / 1 phase / 3 wires
Provisioning:	Line-powered

Power Settings

Management FW:	Version 1.20.80.50 of IDRAC
Memory Mode:	Normal

Power-Relevant Hardware

Power Supply:	1 x 1500 W (non-redundant)
Details:	1500W Titanium Power supply DPN 1PKMH
Backplane:	8 x EDSFF E3.S NVMe
Other Storage:	1 x NVMe E3 Drive
Storage Model #s:	NVMe PM1745 MU E3.S 3.2TB
NICs Installed:	1 x Intel E610-XT2 @ 10 Gbps (Dell P/N FC0HK)
NICs Enabled (FW/OS):	2 / 1
NICs Connected/Speed:	1 @ 10 Gb
Other HW Model #s:	6 x performance fans

Power Analyzer

Power Analyzer:	192.168.0.5:8888
Hardware Vendor:	Yokogawa Meters and Instruments Corporation
Model:	YokogawaWT310E
Serial Number:	T11733386
Input Connection:	Default
Metrology Institute:	Tescom
Calibration By:	NIST
Calibration Label:	T126623
Calibration Date:	13-Aug-2025
PTDaemon® Version:	1.11.4 (5bcc369b; 2026-01-19)
Setup Description:	Connected to PSU1
Current Ranges Used:	10A
Voltage Range Used:	300V

Temperature Meter

Temperature Meter:	192.168.0.5:8889
Hardware Vendor:	Digi International Inc.
Model:	DigiWATCHPORT_H
Serial Number:	W13370940
Input Connection:	USB
PTDaemon Version:	1.11.4 (5bcc369b; 2026-01-19)
Setup Description:	25 mm in front of SUT main airflow intake

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECspeed®2026_int_base = 4.05

SPECspeed®2026_int_energy_base = 1.32

SPECspeed®2026_int_peak = 4.09

SPECspeed®2026_int_energy_peak = 1.34

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Nov-2025

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
801.xz_s	172	343	1.72	123	0.676	358	650	**344**	**1.72**	**128**	**0.649**	**371**	**659**						
807.ntest_s	172	**106**	**10.7**	**63.9**	**3.63**	**600**	**647**	106	10.7	63.7	3.64	599	647						
817.flac_s	172	**586**	**2.96**	**197**	**0.944**	**336**	**385**	583	2.98	200	0.931	343	384						
821.gcc_s	172	147	14.1	96.4	4.41	655	700	**147**	**14.1**	**96.6**	**4.40**	**657**	**702**						
823.llvm_s	172	**111**	**12.7**	**77.1**	**3.80**	**696**	**729**	111	12.7	77.3	3.79	698	731						
827.cppcheck_s	172	175	6.41	95.7	2.54	548	770	**175**	**6.38**	**96.2**	**2.52**	**549**	**768**						
829.abc_s	172	490	1.69	146	0.476	298	351	**491**	**1.69**	**150**	**0.464**	**306**	**350**						
834.vpr_s	172	**425**	**2.25**	**122**	**0.657**	**287**	**291**	423	2.26	122	0.659	288	291						
835.gem5_s	172	446	2.55	128	0.754	288	290	**449**	**2.54**	**129**	**0.749**	**287**	**290**						
838.diamond_s	172	**191**	**5.23**	**85.6**	**2.34**	**448**	**603**	189	5.31	84.8	2.36	450	602						
846.minizinc_s	172	559	1.20	179	0.350	320	348	**569**	**1.18**	**184**	**0.342**	**322**	**348**						
853.ns3_s	172	361	3.19	107	0.923	297	344	**364**	**3.17**	**109**	**0.912**	**299**	**344**						
854.graph500_s	172	**89.8**	**6.80**	**52.6**	**2.47**	**585**	**728**	88.7	6.89	52.0	2.50	586	727						

SPECspeed®2026_int_base = 4.05

SPECspeed®2026_int_energy_base = 1.32

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
801.xz_s	172	343	1.72	123	0.676	358	650	**344**	**1.72**	**128**	**0.649**	**371**	**659**						
807.ntest_s	172	**106**	**10.7**	**63.9**	**3.63**	**600**	**647**	106	10.7	63.7	3.64	599	647						
817.flac_s	172	**586**	**2.96**	**197**	**0.944**	**336**	**385**	583	2.98	200	0.931	343	384						
821.gcc_s	172	147	14.1	96.4	4.41	655	700	**147**	**14.1**	**96.6**	**4.40**	**657**	**702**						
823.llvm_s	172	**111**	**12.7**	**76.9**	**3.81**	**693**	**731**	110	12.8	76.9	3.81	697	732						
827.cppcheck_s	172	175	6.41	95.7	2.54	548	770	**175**	**6.38**	**96.2**	**2.52**	**549**	**768**						
829.abc_s	172	490	1.69	146	0.476	298	351	**491**	**1.69**	**150**	**0.464**	**306**	**350**						
834.vpr_s	172	**425**	**2.25**	**122**	**0.657**	**287**	**291**	423	2.26	122	0.659	288	291						
835.gem5_s	172	398	2.86	114	0.845	287	290	**399**	**2.85**	**115**	**0.843**	**287**	**290**						
838.diamond_s	172	190	5.28	86.5	2.32	456	616	**190**	**5.26**	**86.4**	**2.32**	**454**	**617**						
846.minizinc_s	172	559	1.20	179	0.350	320	348	**569**	**1.18**	**184**	**0.342**	**322**	**348**						
853.ns3_s	172	361	3.19	107	0.923	297	344	**364**	**3.17**	**109**	**0.912**	**299**	**344**						
854.graph500_s	172	**89.8**	**6.80**	**52.6**	**2.47**	**585**	**728**	88.7	6.89	52.0	2.50	586	727						

SPECspeed®2026_int_peak = 4.09

SPECspeed®2026_int_energy_peak = 1.34

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2026rc2/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
Benchmark run from a 120 GB ramdisk created with the cmd: "mount -t tmpfs -o size=120G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS Settings:
         Logical Processor : Disabled
 Virtualization Technology : Disabled
       Hardware Prefetcher : Disabled
          Sub NUMA Cluster : Enabled
     MADT Core Enumeration : Linear

            System Profile : Custom
      CPU Power Management : OS DBPM
          Memory Frequency : Maximum Reliability
               Turbo Boost : Disabled
    Energy Efficient Turbo : Disabled
    Latency Optimized Mode : Enabled
   Energy Efficient Policy : Energy Efficient
             ADDDC Setting : Disabled
       DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on B2KQ54-R770 Thu Feb  5 20:10:44 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
```

(Continued on next page)

Platform Notes (Continued)

```
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64

------------------------------------------------------------
2. w
   20:10:44 up  4:24,  1 user,  load average: 1.30, 23.39, 62.31
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:47   44.00s  2.84s  0.00s /bin/bash
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126573
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126573
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
   html,pdf,txt
 runcpu --nobuild --reportable --action validate --define default-platform-flags -c
  ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 172 --define cores=172 --tune base,peak
  -o all --define intspeedaffinity --define drop_caches --iterations 2 --define DL-VERS=7.0_T01
   --output_format html,pdf,txt intspeed
 runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
  ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 172 --define cores=172 --tune base,peak
  --output_format all --define intspeedaffinity --define drop_caches --iterations 2 --define DL-VERS=7.0_T01
  --output_format html,pdf,txt --runmode speed --tune base:peak --size refspeed intspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003f3
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 86
```

(Continued on next page)

Platform Notes (Continued)

```
     siblings        : 86
     2 physical ids (chips)
     172 processors (hardware threads)
     physical id 0: core ids 0-42,64-106
     physical id 1: core ids 0-42,64-106
     physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
     0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
     physical id 1: apicids
    256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
    08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,40
    2,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454
     ,456,458,460,462,464,466,468
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               172
  On-line CPU(s) list:                  0-171
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel
  Model name:                           Intel(R) Xeon(R) 6787P
  BIOS Model name:                      Intel(R) Xeon(R) 6787P  CPU @ 2.0GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   1
  Core(s) per socket:                   86
  Socket(s):                            2
  Stepping:                             1
  CPU(s) scaling MHz:                   40%
  CPU max MHz:                          2000.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             4000.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
```

(Continued on next page)

Platform Notes (Continued)

```
                                  nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
                                 pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
                                aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                 cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                  ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                                 invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                                wbnoinvd dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                          amx_int8 flush_l1d arch_capabilities
  L1d cache:                              8.1 MiB (172 instances)
  L1i cache:                              10.8 MiB (172 instances)
  L2 cache:                               344 MiB (172 instances)
  L3 cache:                               672 MiB (2 instances)
  NUMA node(s):                           4
  NUMA node0 CPU(s):                      0-42
  NUMA node1 CPU(s):                      43-85
  NUMA node2 CPU(s):                      86-128
  NUMA node3 CPU(s):                      129-171
  Vulnerability Gather data sampling:     Not affected
  Vulnerability Itlb multihit:            Not affected
  Vulnerability L1tf:                     Not affected
  Vulnerability Mds:                      Not affected
  Vulnerability Meltdown:                 Not affected
  Vulnerability Mmio stale data:          Not affected
  Vulnerability Reg file data sampling:   Not affected
  Vulnerability Retbleed:                 Not affected
  Vulnerability Spec rstack overflow:     Not affected
  Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                          PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsx async abort:          Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     8.1M   12 Data            1     64        1             64
      L1i       64K    10.8M   16 Instruction     1     64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
     L2          2M     344M   16 Unified         2   2048        1              64
     L3        336M     672M   16 Unified         3 344064        1              64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42
  node 0 size: 257600 MB
  node 0 free: 243484 MB
  node 1 cpus: 43-85
  node 1 size: 258036 MB
  node 1 free: 257318 MB
  node 2 cpus: 86-128
  node 2 size: 258036 MB
  node 2 free: 243824 MB
  node 3 cpus: 129-171
  node 3 size: 257996 MB
  node 3 free: 257341 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056429864 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 5 15:46

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
```

(Continued on next page)

Platform Notes (Continued)

```
                    wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime   systemd-remount-fs
  disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                    firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                    man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                    vncserver@
  indirect          systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=02b3adac-b4ec-425b-b06d-e66675474f80
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 143:
    current policy: frequency should be within 800 MHz and 2.00 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: no
      Active: no

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  120G   13G  108G  11% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R770
    Product Family: PowerEdge
    Serial:         5B2KQ54

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)

Platform Notes (Continued)

```
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x 002C069D002C MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.6.4
    BIOS Date:         11/02/2025
    BIOS Revision:     1.6
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base, peak) 827.cppcheck_s(base, peak) 853.ns3_s(base,
       | peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base, peak) 817.flac_s(base, peak) 821.gcc_s(base, peak)
       | 823.llvm_s(base, peak) 829.abc_s(base, peak) 834.vpr_s(base, peak)
       | 835.gem5_s(base, peak) 838.diamond_s(base, peak)
       | 846.minizinc_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -DSPEC_LP64
835.gem5_s: -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

807.ntest_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib

(Continued on next page)

Base Optimization Flags (Continued)

807.ntest_s (continued):
-ljemalloc

827.cppcheck_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

853.ns3_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

801.xz_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

817.flac_s: Same as 801.xz_s

821.gcc_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

823.llvm_s: Same as 801.xz_s

829.abc_s: Same as 821.gcc_s

834.vpr_s: Same as 821.gcc_s

835.gem5_s: Same as 801.xz_s

838.diamond_s: Same as 801.xz_s

846.minizinc_s: Same as 801.xz_s

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

854.graph500_s: basepeak = yes

C++ benchmarks:

807.ntest_s: basepeak = yes

827.cppcheck_s: basepeak = yes

853.ns3_s: basepeak = yes

Benchmarks using both C and C++:

801.xz_s: basepeak = yes

817.flac_s: basepeak = yes

821.gcc_s: basepeak = yes

823.llvm_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto

(Continued on next page)

Peak Optimization Flags (Continued)

823.llvm_s (continued):
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -pthread
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

829.abc_s: basepeak = yes

834.vpr_s: basepeak = yes

835.gem5_s: Same as 823.llvm_s

838.diamond_s: Same as 823.llvm_s

846.minizinc_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html
http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml
http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 21:10:43-0500.
Report generated on 2026-05-04 23:29:15 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.