SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9755 128-Core Processor)

SPECspeed®2026_fp_base = 18.3

SPECspeed®2026_fp_peak = 18.3

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

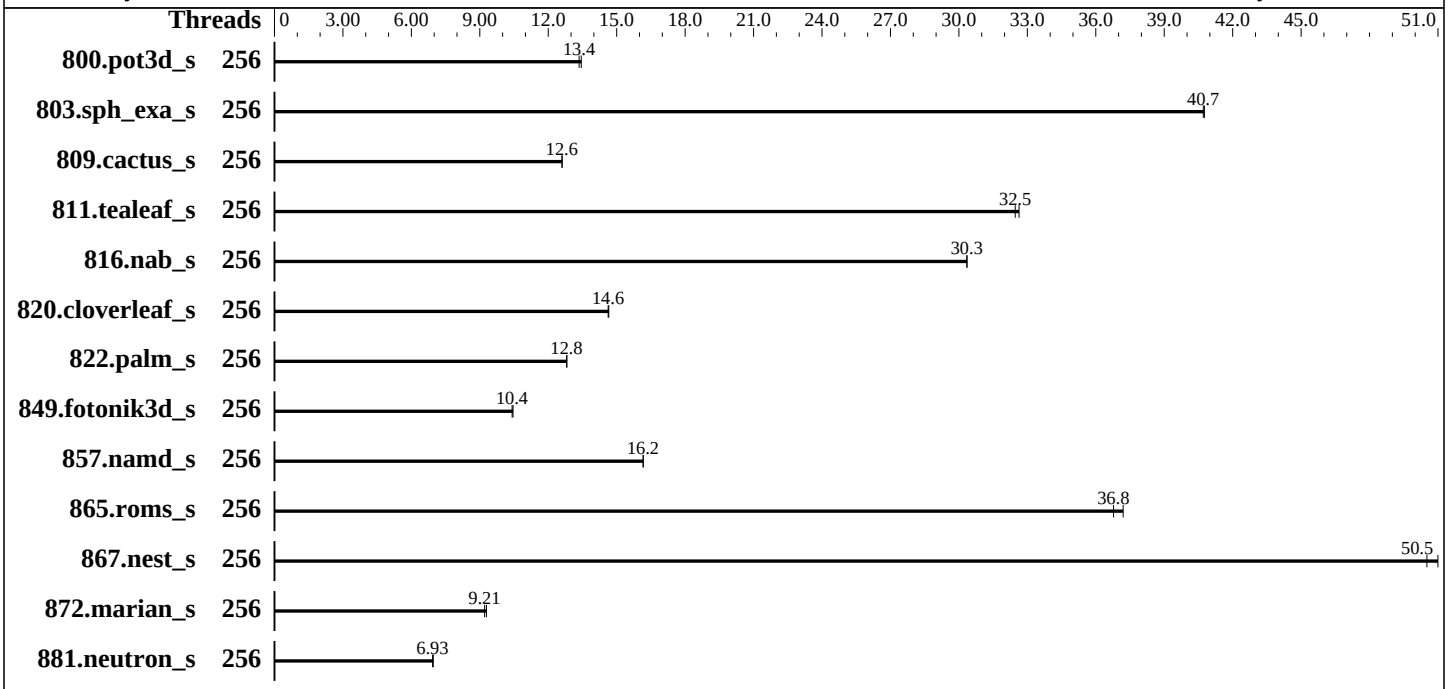

Hardware

CPU Name:	AMD EPYC 9755
Max MHz:	4100
Nominal:	2700
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	3 TB (24 x 128 GB 2Rx4 PC5-6400B-R)
Storage:	250 GB on tmpfs
Cooling:	Air
Other:	None

Software

OS:	Ubuntu 24.04 LTS 6.8.0-87-generic
Compiler:	C/C++: Version 5.1.0 of AOCC Fortran: Flang v22
Compiler Category:	Vendor
Firmware:	Version 1.5.3 released Oct-2025
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9755 128-Core Processor)

SPECspeed®2026_fp_base = 18.3

SPECspeed®2026_fp_peak = 18.3

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	256	50.1	13.4	**50.4**	**13.4**			256	50.1	13.4	**50.4**	**13.4**		
803.sph_exa_s	256	**30.4**	**40.7**	30.4	40.8			256	**30.4**	**40.7**	30.4	40.8		
809.cactus_s	256	89.0	12.6	**89.1**	**12.6**			256	89.0	12.6	**89.1**	**12.6**		
811.tealeaf_s	256	17.1	32.6	**17.2**	**32.5**			256	17.1	32.6	**17.2**	**32.5**		
816.nab_s	256	37.1	30.4	**37.1**	**30.3**			256	37.1	30.4	**37.1**	**30.3**		
820.cloverleaf_s	256	**58.6**	**14.6**	58.5	14.7			256	**58.6**	**14.6**	58.5	14.7		
822.palm_s	256	95.8	12.8	**95.9**	**12.8**			256	95.8	12.8	**95.9**	**12.8**		
849.fotonik3d_s	256	**63.4**	**10.4**	63.1	10.5			256	**63.4**	**10.4**	63.1	10.5		
857.namd_s	256	**89.9**	**16.2**	89.8	16.2			256	**89.9**	**16.2**	89.8	16.2		
865.roms_s	256	**29.6**	**36.8**	29.3	37.2			256	**29.6**	**36.8**	29.3	37.2		
867.nest_s	256	42.4	51.0	**42.8**	**50.5**			256	42.4	51.0	**42.8**	**50.5**		
872.marian_s	256	116	9.29	**117**	**9.21**			256	116	9.29	**117**	**9.21**		
881.neutron_s	256	**118**	**6.93**	117	6.96			256	**118**	**6.93**	117	6.96		

SPECspeed®2026_fp_base = **18.3**

SPECspeed®2026_fp_peak = **18.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

(Continued on next page)

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib:/mnt
     /ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
Benchmark run from a 250 GB ramdisk created with the cmd: "mount -t tmpfs -o size=250G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS Settings:
            Virtualization Technology : Disabled
                NUMA Nodes Per Socket : 4

                        System Profile : Custom
                               C-States : Disabled
                  Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link Power Management : Disabled
      Periodic Directory Rinse Tuning : Blended
                  Determinism Control : Manual
                   Determinism Slider : Power Determinism
                       Optimizer Mode : Enabled
  Algorithm Performance Boost Disable : Enabled
              ApbDis Fixed DF P-State : P0
                   Dram Refresh Delay : Performance
                  DIMM Self Healing -
        on Uncorrectable Memory Error : Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on SLR7736-R7725 Thu Feb  5 12:43:51 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-87-generic #88-Ubuntu SMP PREEMPT_DYNAMIC Sat Oct 11 09:28:41 UTC 2025 x86_64

------------------------------------------------------------
2. w
   12:43:51 up 2 min,  1 user,  load average: 0.40, 0.24, 0.10
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                12:41    1:19   2.38s  1.14s /bin/bash
  ./amd_speed_aocc510_flang22_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              12381603
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
   html,pdf,txt
 python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
 /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
 runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html,pdf,txt fpspeed
 runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode speed --tune base --size
   test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9755 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00215a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu cores       : 128
     siblings        : 256
     2 physical ids (chips)
     512 processors (hardware threads)
     physical id 0: core ids 0-127
     physical id 1: core ids 0-127
     physical id 0: apicids 0-255
     physical id 1: apicids 256-511
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               512
   On-line CPU(s) list:                  0-511
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       AMD
   Model name:                           AMD EPYC 9755 128-Core Processor
   BIOS Model name:                    AMD EPYC 9755 128-Core Processor                CPU @ 2.7GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   128
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   56%
   CPU max MHz:                          2700.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             5392.79
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                           osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                           smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)

Platform Notes (Continued)

```
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                           cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                          xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                          svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                         pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                           vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                          movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                                  flush_l1d debug_swap
  L1d cache:                      12 MiB (256 instances)
  L1i cache:                      8 MiB (256 instances)
  L2 cache:                       256 MiB (256 instances)
  L3 cache:                       1 GiB (32 instances)
  NUMA node(s):                   2
  NUMA node0 CPU(s):              0-127,256-383
  NUMA node1 CPU(s):              128-255,384-511
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected
  Vulnerability Vmscape:                Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      12M   12 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M   16 Unified         2  1024        1             64
     L3        32M       1G   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-127,256-383
  node 0 size: 1547387 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 free: 1543895 MB
   node 1 cpus: 128-255,384-511
   node 1 size: 1548090 MB
   node 1 free: 1531630 MB
   node distances:
   node   0   1
     0:  10  32
     1:  32  10

------------------------------------------------------------
9. /proc/meminfo
    MemTotal:       3169769608 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 5 12:41

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local
                     console-setup cron e2scrub_reap finalrd getty@ gpu-manager grub-common
                   grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher
                   open-iscsi pollinate secureboot-db setvtrgb systemd-networkd systemd-networkd-wait-online
                     systemd-pstore systemd-resolved systemd-timesyncd thermald
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid serial-getty@ ssh systemd-boot-check-no-failures
                     systemd-confext systemd-network-generator systemd-networkd-wait-online@
                   systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
                     systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                     systemd-time-wait-sync upower
  indirect           systemd-sysupdate systemd-sysupdate-reboot
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-87-generic
  root=UUID=a7565640-059d-4a86-afc8-58cd1cadb778
  ro

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
14. cpupower frequency-info
  analyzing CPU 415:
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2700MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  250G   11G  240G   5% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          Dell Inc.
    Product:         PowerEdge R7725
    Product Family: PowerEdge
    Serial:          SLR7736

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x 802C0000802C MTC40F2047S1RC64BB1 128 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.5.3
   BIOS Date:         10/29/2025
   BIOS Revision:     1.5
```

Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
        | 872.marian_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

Fortran benchmarks:
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-lomp

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-return-type -Wno-unused-command-line-argument

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: basepeak = yes

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: basepeak = yes

857.namd_s: basepeak = yes

867.nest_s: basepeak = yes

872.marian_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

800.pot3d_s: `basepeak = yes`

820.cloverleaf_s: `basepeak = yes`

822.palm_s: `basepeak = yes`

849.fotonik3d_s: `basepeak = yes`

865.roms_s: `basepeak = yes`

Benchmarks using both C and C++:

809.cactus_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/aocc-flags.html`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/aocc-flags.xml`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 07:43:50-0500.
Report generated on 2026-05-04 23:32:18 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.