SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 637

SPECrate®2026_fp_peak = 637

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

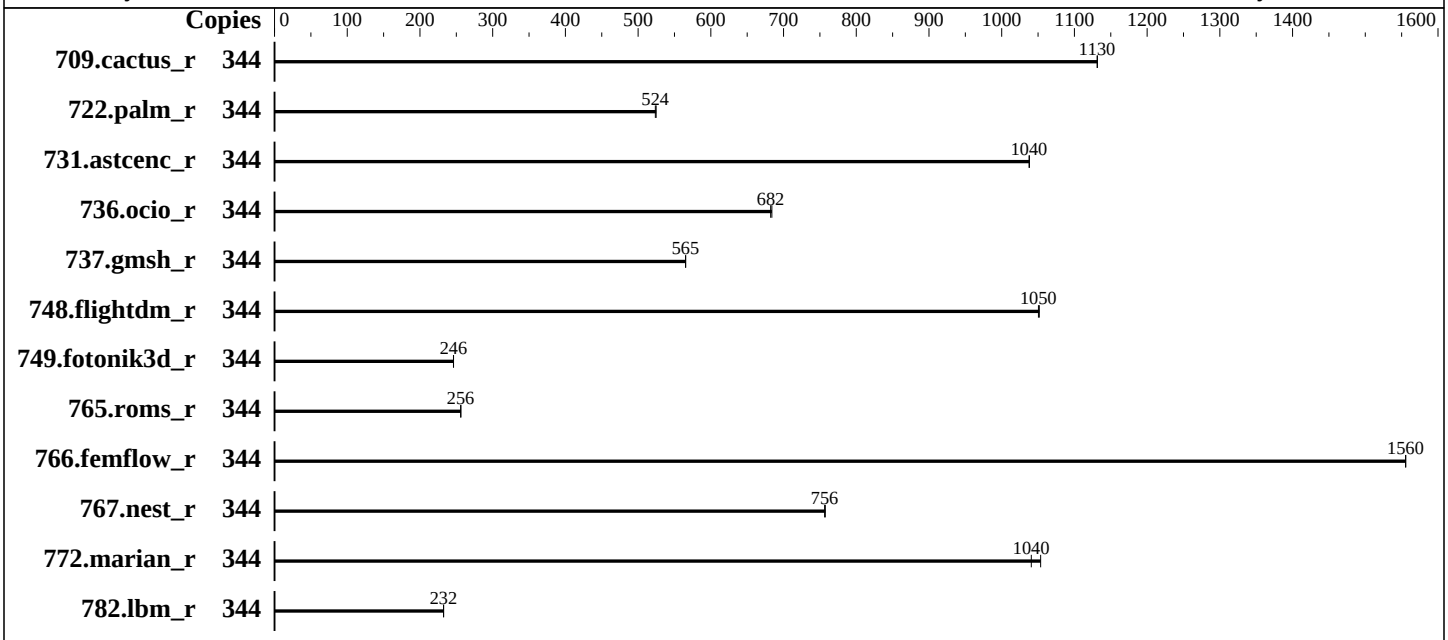

Hardware

CPU Name:	Intel Xeon 6787P
Max MHz:	3800
Nominal:	2000
Enabled:	172 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 X 3.2 TB NVMe SSD
Cooling:	DLC
Other:	None

Software

OS:	Ubuntu 24.04.3 LTS Kernel 6.8.0-90-generic
Compiler:	C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	HPE BIOS Version v1.60 released Jan-2026
File System:	ext4
System State:	Run level 5 (multi-user, graphical)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS is set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant Compute DL380 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 637

SPECrate®2026_fp_peak = 637

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	344	261	1130	**261**	**1130**			344	261	1130	**261**	**1130**		
722.palm_r	344	**867**	**524**	865	525			344	**867**	**524**	865	525		
731.astcenc_r	344	**278**	**1040**	278	1040			344	**278**	**1040**	278	1040		
736.ocio_r	344	440	684	**441**	**682**			344	440	684	**441**	**682**		
737.gmsh_r	344	279	565	**279**	**565**			344	279	565	**279**	**565**		
748.flightdm_r	344	234	1050	**234**	**1050**			344	234	1050	**234**	**1050**		
749.fotonik3d_r	344	1615	246	**1616**	**246**			344	1615	246	**1616**	**246**		
765.roms_r	344	2113	256	**2117**	**256**			344	2113	256	**2117**	**256**		
766.femflow_r	344	**324**	**1560**	324	1560			344	**324**	**1560**	324	1560		
767.nest_r	344	360	757	**361**	**756**			344	360	757	**361**	**756**		
772.marian_r	344	**522**	**1040**	516	1050			344	**522**	**1040**	516	1050		
782.lbm_r	344	**848**	**232**	848	233			344	**848**	**232**	848	233		

SPECrate®2026_fp_base = 637

SPECrate®2026_fp_peak = 637

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 was used to generate numactl commands to bind each copy to a specific processor.
 For details, please see the config file.
```

Operating System Notes

```
 Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Throughput Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Intel UPI Prefetch set to Disabled
 Workload Profile set to Custom
  DCU Stream Prefetcher set to Disabled
  Adjacent Sector Prefetch set to Disabled

 Sysinfo program /home/cpu2026/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on admin1 Wed Feb  4 01:30:20 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
```

(Continued on next page)

Platform Notes (Continued)

```
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -srvm
   Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

 ------------------------------------------------------------
 2. w
    01:30:20 up 17:46,  3 users,  load average: 215.49, 309.58, 323.81
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
   admin1            10.30.195.94     23:05   17:45m  0.00s  0.01s sshd: admin1 [priv]
   admin1            10.30.195.94     Tue07   17:45m  0.00s  0.11s sshd: admin1 [priv]
   admin1   tty1     -                Tue07   17:42m  0.03s   ?    -bash

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root
   From the command 'logname':       admin1

 ------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 132053172
   process              4126342
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 5. sysinfo process ancestry
  /sbin/init
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: admin1 [priv]
  sshd: admin1@pts/0
  -bash
  sudo -i
  sudo -i
  -bash
  -bash
  -bash
  runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
    ic2025.3-core-avx512-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
    physicalfirst --define invoke_with_interleave --define drop_caches --tune base -n 2 -o all fprate
  runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
    ic2025.3-core-avx512-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
    physicalfirst --define invoke_with_interleave --define drop_caches --tune base --iterations 2
    --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
    --logfile $SPEC/tmp/CPU2026.014/templogs/preenv.fprate.014.0.log --lognum 014.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2026

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) 6787P
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 173
     stepping        : 1
     microcode       : 0x1000411
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
     cpu cores       : 86
     siblings        : 172
     2 physical ids (chips)
     344 processors (hardware threads)
     physical id 0: core ids 0-42,64-106
     physical id 1: core ids 0-42,64-106
     physical id 0: apicids 0-85,128-213
     physical id 1: apicids 256-341,384-469
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
CPU op-mode(s):                  32-bit, 64-bit
Address sizes:                   46 bits physical, 57 bits virtual
Byte Order:                      Little Endian
CPU(s):                          344
On-line CPU(s) list:             0-343
Vendor ID:                       GenuineIntel
BIOS Vendor ID:                  Intel(R) Corporation
Model name:                      Intel(R) Xeon(R) 6787P
BIOS Model name:                 Intel(R) Xeon(R) 6787P  CPU @ 2.0GHz
BIOS CPU family:                 179
CPU family:                      6
Model:                           173
Thread(s) per core:              2
Core(s) per socket:              86
Socket(s):                       2
Stepping:                        1
CPU(s) scaling MHz:              22%
CPU max MHz:                     3800.0000
CPU min MHz:                     800.0000
BogoMIPS:                        4000.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                 pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                 pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                 nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                 tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
                                 ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
                                 fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a
                                 avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                                 avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                 user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                 hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke
                                 waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                                 movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                                 ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                 arch_capabilities ibpb_exit_to_user
Virtualization:                  VT-x
L1d cache:                       8.1 MiB (172 instances)
L1i cache:                       10.8 MiB (172 instances)
L2 cache:                        344 MiB (172 instances)
L3 cache:                        672 MiB (2 instances)
NUMA node(s):                    4
NUMA node0 CPU(s):               0-42,172-214
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node1 CPU(s):                    43-85,215-257
   NUMA node2 CPU(s):                    86-128,258-300
   NUMA node3 CPU(s):                    129-171,301-343
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected
   Vulnerability Vmscape:                Mitigation; IBPB before exit to userspace

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     8.1M   12 Data            1     64        1             64
      L1i       64K    10.8M   16 Instruction     1     64        1             64
      L2         2M     344M   16 Unified         2   2048        1             64
      L3       336M     672M   16 Unified         3 344064        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0-42,172-214
   node 0 size: 257667 MB
   node 0 free: 223318 MB
   node 1 cpus: 43-85,215-257
   node 1 size: 258018 MB
   node 1 free: 226609 MB
   node 2 cpus: 86-128,258-300
   node 2 size: 258018 MB
   node 2 free: 226659 MB
   node 3 cpus: 129-171,301-343
   node 3 size: 257960 MB
   node 3 free: 226322 MB
   node distances:
   node   0   1   2   3
     0:  10  12  21  21
     1:  12  10  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     2:  21  21  10  12
     3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056425392 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 3 07:44

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                     grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                     snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                     ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                 systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                 systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                     systemd-time-wait-sync upower
  indirect           systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
  root=UUID=390648eb-0859-4220-8de1-88ef9034ae45
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 7:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
```

(Continued on next page)

Platform Notes (Continued)

```
                    within this range.
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    40
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  2.9T  138G  2.6T   5% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:          HPE
    Product:         HPE ProLiant Compute DL380 Gen12
    Product Family:  ProLiant
    Serial:          CNXD1M02CK

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
  Memory:
    2x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
    14x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.60
   BIOS Date:         01/09/2026
   BIOS Revision:     1.60
   Firmware Revision: 1.18
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
         | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C   | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.astcenc_r: -DSPEC_LP64
736.ocio_r: -DSPEC_LP64
737.gmsh_r: -DSPEC_LP64 -fno-associative-math
748.flightdm_r: -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:
-m64 -stand f18 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

731.astcenc_r: `basepeak = yes`

736.ocio_r: `basepeak = yes`

748.flightdm_r: `basepeak = yes`

766.femflow_r: `basepeak = yes`

767.nest_r: `basepeak = yes`

772.marian_r: `basepeak = yes`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `basepeak = yes`

Benchmarks using both C and C++:

709.cactus_r: `basepeak = yes`

737.gmsh_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.html`
`http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.xml`
`http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 20:30:20-0500.
Report generated on 2026-05-11 16:37:43 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.