SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_fp_base = 12.5

SPECspeed®2026_fp_peak = 12.5

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

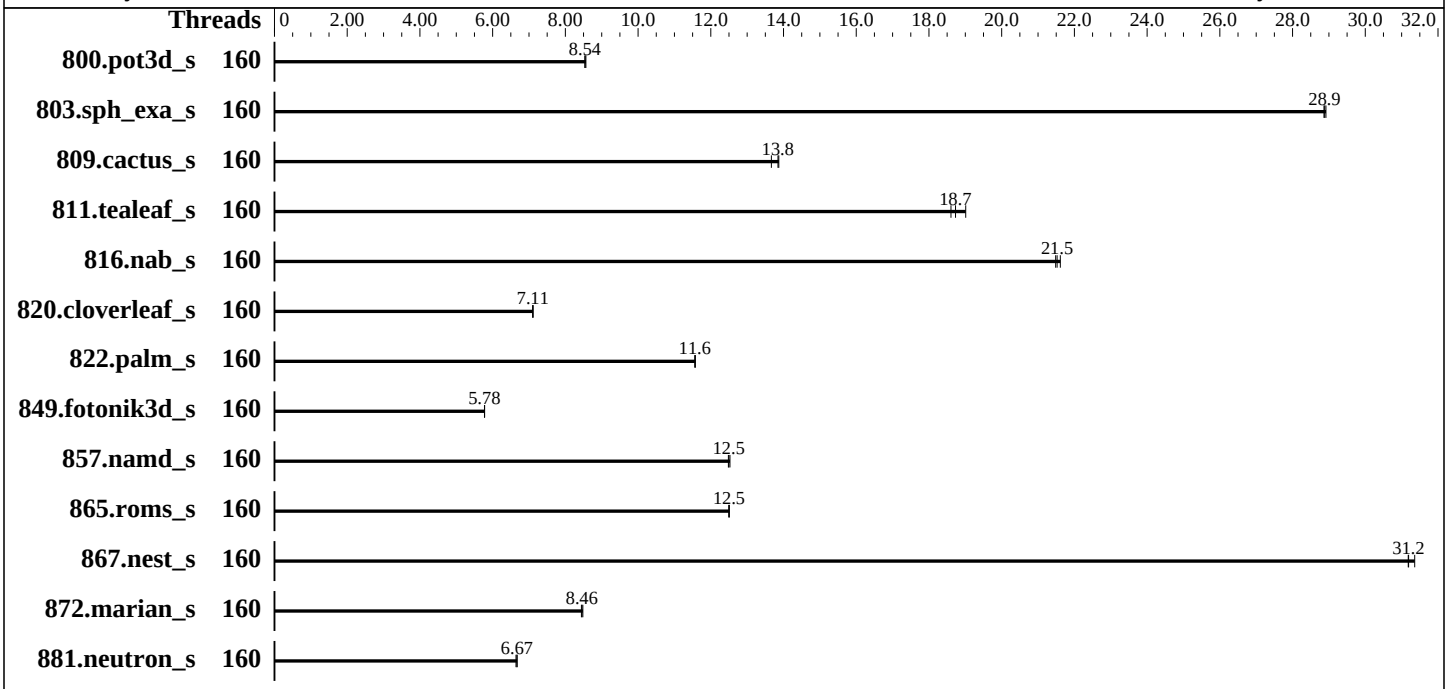

Hardware

CPU Name:	AMD EPYC 9845
Max MHz:	3700
Nominal:	2100
Enabled:	160 cores, 1 chip
Orderable:	1 Chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 480 GB NVMe SSD
Cooling:	CLC
Other:	None

Software

OS:	Ubuntu 24.04.3 LTS Kernel 6.8.0-94-generic
Compiler:	C/C++: Version 5.1.0 of AOCC Fortran: Flang v22
Compiler Category:	Vendor
Firmware:	HPE BIOS Version v2.90 released Jan-2026
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS is set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL325 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_fp_base = 12.5

SPECspeed®2026_fp_peak = 12.5

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	160	**78.8**	**8.54**	78.8	8.54	78.6	8.56	160	**78.8**	**8.54**	78.8	8.54	78.6	8.56
803.sph_exa_s	160	**42.9**	**28.9**	42.8	28.9	42.9	28.9	160	**42.9**	**28.9**	42.8	28.9	42.9	28.9
809.cactus_s	160	82.1	13.7	**81.0**	**13.8**	80.9	13.9	160	82.1	13.7	**81.0**	**13.8**	80.9	13.9
811.tealeaf_s	160	29.3	19.0	29.9	18.6	**29.7**	**18.7**	160	29.3	19.0	29.9	18.6	**29.7**	**18.7**
816.nab_s	160	52.1	21.6	**52.3**	**21.5**	52.4	21.5	160	52.1	21.6	**52.3**	**21.5**	52.4	21.5
820.cloverleaf_s	160	121	7.11	121	7.10	**121**	**7.11**	160	121	7.11	121	7.10	**121**	**7.11**
822.palm_s	160	**106**	**11.6**	106	11.6	106	11.6	160	**106**	**11.6**	106	11.6	106	11.6
849.fotonik3d_s	160	114	5.78	114	5.78	**114**	**5.78**	160	114	5.78	114	5.78	**114**	**5.78**
857.namd_s	160	116	12.5	**116**	**12.5**	116	12.5	160	116	12.5	**116**	**12.5**	116	12.5
865.roms_s	160	87.2	12.5	**87.2**	**12.5**	87.1	12.5	160	87.2	12.5	**87.2**	**12.5**	87.1	12.5
867.nest_s	160	68.9	31.4	**69.2**	**31.2**	69.3	31.2	160	68.9	31.4	**69.2**	**31.2**	69.3	31.2
872.marian_s	160	**128**	**8.46**	128	8.48	128	8.44	160	**128**	**8.46**	128	8.48	128	8.44
881.neutron_s	160	122	6.67	**122**	**6.67**	123	6.64	160	122	6.67	**122**	**6.67**	123	6.64

SPECspeed®2026_fp_base = 12.5

SPECspeed®2026_fp_peak = 12.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

(Continued on next page)

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-159"
LD_LIBRARY_PATH =
     "/home/cpu2026/amd_speed_aocc510_flang22_znver5_A_lib/lib:/home/cpu2026/
     amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB
Memory using Ubuntu 24.04
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
Last-Level Cache (LLC) as NUMA Node set to Enabled
ACPI CST C2 Latency set to 18 microseconds
Thermal Configuration set to Maximum Cooling
AMD SMT Option set to Disabled
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode

 Sysinfo program /home/cpu2026/bin/sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Tue Nov 25 18:40:30 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan  9 20:36:55 UTC 2026 x86_64

------------------------------------------------------------
2. w
   18:40:30 up 24 min,  2 users,  load average: 0.00, 0.00, 0.00
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  admin1            172.16.0.100     18:21   23:59   0.00s  0.02s sshd: admin1 [priv]
  admin1   tty1     -                18:19   20:52   0.04s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
```

(Continued on next page)

Platform Notes (Continued)

```
  From the command 'logname':       admin1

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3094317
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: admin1 [priv]
 sshd: admin1@pts/0
 -bash
 sudo ./run_fpspeed.py
 sudo ./run_fpspeed.py
 python3 ./run_fpspeed.py
 /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
 runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
   --nopower --runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9845 160-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101054
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 160
    siblings        : 160
```

(Continued on next page)

Platform Notes (Continued)

```
     1 physical ids (chips)
     160 processors (hardware threads)
     physical id 0: core ids 0-159
     physical id 0: apicids 0-159
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               160
   On-line CPU(s) list:                  0-159
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9845 160-Core Processor
   BIOS Model name:                    AMD EPYC 9845 160-Core Processor                CPU @ 2.1GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   1
   Core(s) per socket:                   160
   Socket(s):                            1
   Stepping:                             0
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   105%
   CPU max MHz:                          2100.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4193.78
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
   rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
   xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
```

(Continued on next page)

Platform Notes (Continued)

```
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                               pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                               movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                        flush_l1d debug_swap
  Virtualization:                       AMD-V
  L1d cache:                            7.5 MiB (160 instances)
  L1i cache:                            5 MiB (160 instances)
  L2 cache:                             160 MiB (160 instances)
  L3 cache:                             320 MiB (10 instances)
  NUMA node(s):                         10
  NUMA node0 CPU(s):                    0-15
  NUMA node1 CPU(s):                    16-31
  NUMA node2 CPU(s):                    32-47
  NUMA node3 CPU(s):                    48-63
  NUMA node4 CPU(s):                    64-79
  NUMA node5 CPU(s):                    80-95
  NUMA node6 CPU(s):                    96-111
  NUMA node7 CPU(s):                    112-127
  NUMA node8 CPU(s):                    128-143
  NUMA node9 CPU(s):                    144-159
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected
  Vulnerability Vmscape:                Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     7.5M   12 Data            1    64        1             64
     L1i       32K       5M    8 Instruction     1    64        1             64
     L2         1M     160M   16 Unified         2  1024        1             64
     L3        32M     320M   16 Unified         3 32768        1             64

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 10 nodes (0-9)
   node 0 cpus: 0-15
   node 0 size: 77093 MB
   node 0 free: 76854 MB
   node 1 cpus: 16-31
   node 1 size: 77408 MB
   node 1 free: 77207 MB
   node 2 cpus: 32-47
   node 2 size: 77410 MB
   node 2 free: 77228 MB
   node 3 cpus: 48-63
   node 3 size: 77408 MB
   node 3 free: 77238 MB
   node 4 cpus: 64-79
   node 4 size: 77410 MB
   node 4 free: 77150 MB
   node 5 cpus: 80-95
   node 5 size: 77410 MB
   node 5 free: 76968 MB
   node 6 cpus: 96-111
   node 6 size: 77408 MB
   node 6 free: 77120 MB
   node 7 cpus: 112-127
   node 7 size: 77410 MB
   node 7 free: 76553 MB
   node 8 cpus: 128-143
   node 8 size: 77410 MB
   node 8 free: 77231 MB
   node 9 cpus: 144-159
   node 9 size: 77288 MB
   node 9 free: 77101 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9
     0:  10  11  11  11  11  11  11  11  11  11
     1:  11  10  11  11  11  11  11  11  11  11
     2:  11  11  10  11  11  11  11  11  11  11
     3:  11  11  11  10  11  11  11  11  11  11
     4:  11  11  11  11  10  11  11  11  11  11
     5:  11  11  11  11  11  10  11  11  11  11
     6:  11  11  11  11  11  11  10  11  11  11
     7:  11  11  11  11  11  11  11  10  11  11
     8:  11  11  11  11  11  11  11  11  10  11
     9:  11  11  11  11  11  11  11  11  11  10

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 9. /proc/meminfo
    MemTotal:       792227000 kB

------------------------------------------------------------
10. who -r
  run-level 5 Nov 25 18:16

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                     grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                     snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                     systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
                       unattended-upgrades vgauth
  enabled-runtime    netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled           console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                     systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                       systemd-time-wait-sync systemd-timesyncd upower
  indirect           systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-94-generic
  root=UUID=c8895b10-3344-47fb-81a4-2b6fb85bbd20
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 36:
    current policy: frequency should be within 1.50 GHz and 2.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
```

(Continued on next page)

Platform Notes (Continued)

```
      Boost States: 0
      Total States: 3
      Pstate-P0:  2100MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: balanced

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  438G   93G  323G  23% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL325 Gen11
    Product Family: ProLiant
    Serial:         DL325G11-008

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
     11x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      2.90
   BIOS Date:         01/09/2026
   BIOS Revision:     2.90
   Firmware Revision: 1.70
```

Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
        | 872.marian_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

Fortran benchmarks:
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-return-type -Wno-unused-command-line-argument

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: basepeak = yes

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: basepeak = yes

857.namd_s: basepeak = yes

867.nest_s: basepeak = yes

872.marian_s: basepeak = yes

Fortran benchmarks:

800.pot3d_s: basepeak = yes

820.cloverleaf_s: basepeak = yes

822.palm_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

849.fotonik3d_s: `basepeak = yes`

865.roms_s: `basepeak = yes`

Benchmarks using both C and C++:

809.cactus_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2025-11-25 13:40:30-0500.
Report generated on 2026-05-04 23:33:22 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.