SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base =	818
SPECrate®2026_int_energy_base =	81.0
SPECrate®2026_int_peak =	818
SPECrate®2026_int_energy_peak =	81.0

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

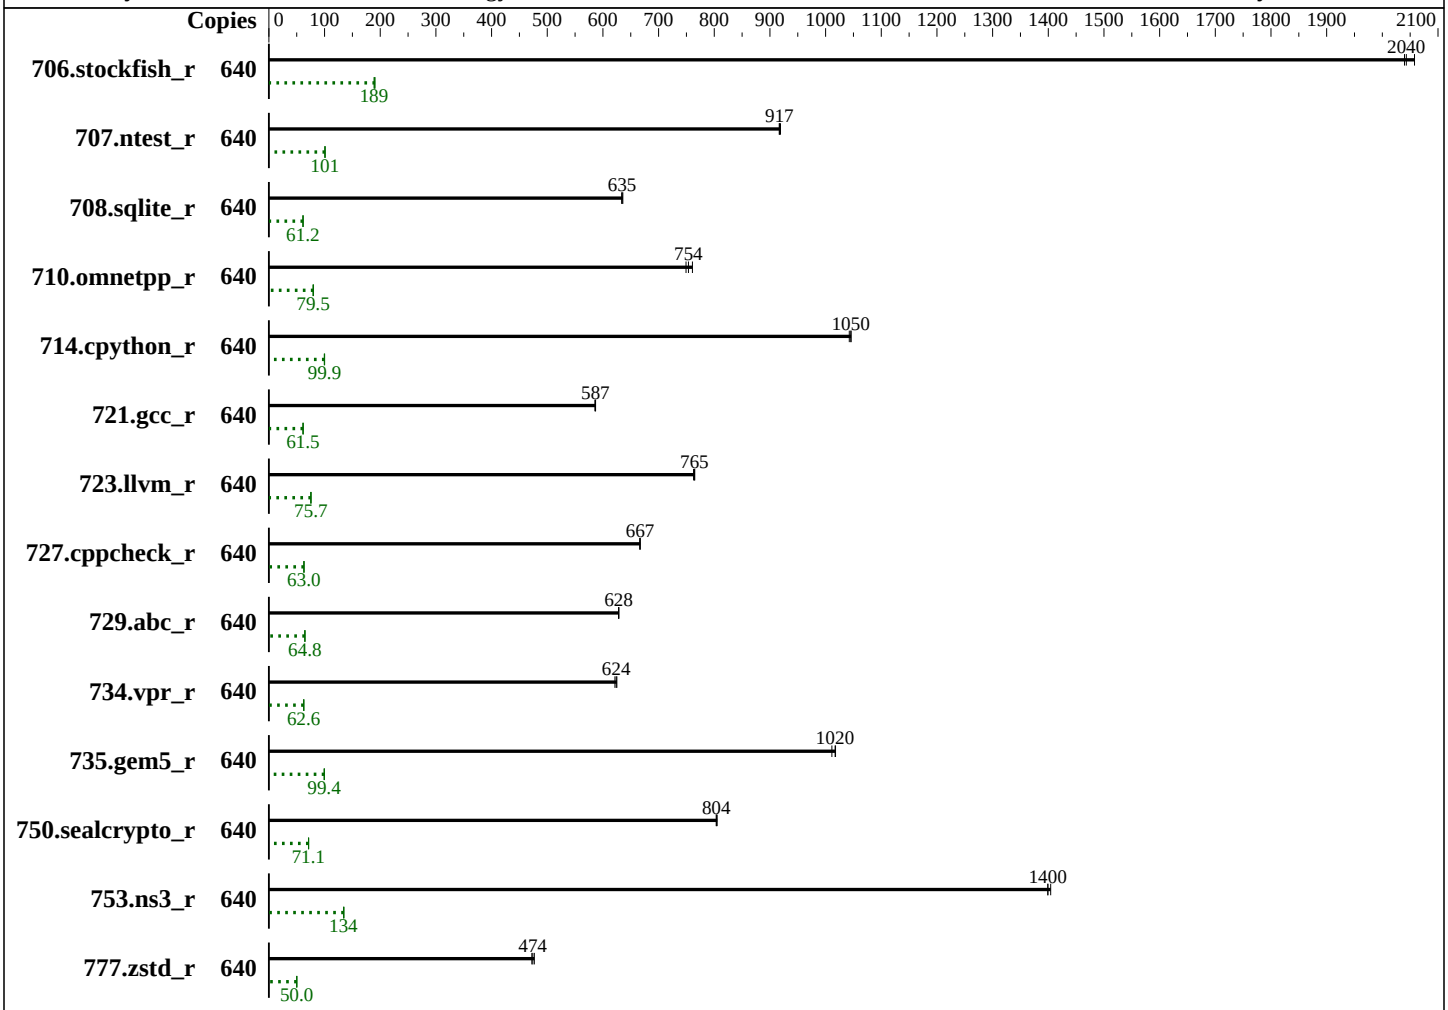

Hardware

CPU Name:	AMD EPYC 9845
Max MHz:	3700
Nominal:	2100
Enabled:	320 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None

(Continued on next page)

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Lenovo BIOS Version KAE141G 5.81 released Jan-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to balance power and performance

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base =	818
SPECrate®2026_int_energy_base =	81.0
SPECrate®2026_int_peak =	818
SPECrate®2026_int_energy_peak =	81.0

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Hardware (Continued)

Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 480 GB SATA SSD
Cooling: Air
Other: None

Power

Max. Power (W): 1118.0
Idle Power (W): 146.1
Min. Temperature (C): 22.25
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 56.2 of KAX367O
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1800 W (non-redundant)
Details: ThinkSystem 1800W 230V Platinum Hot-Swap Gen2 Power Supply v2 4P57A78362
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A82259
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UD17023E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: CEPREI Calibration and Testing Centre
Calibration Label: 1GA25011731-0005
Calibration Date: 15-Sep-2025
PTDaemon® Version: 1.11.1 (462c978e; 2024-09-07)
Setup Description: Connected to PSU1
Current Ranges Used: 5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63181846
Input Connection: USB
PTDaemon Version: 1.11.1 (462c978e; 2024-09-07)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	640	395	2040	359	191	908	1070	**395**	**2040**	**362**	**189**	**918**	**1080**	392	2060	361	190	922	1070
707.ntest_r	640	413	917	314	101	760	804	**413**	**917**	**315**	**101**	**763**	**808**	412	919	316	101	766	807

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 818

SPECrate®2026_int_energy_base = 81.0

SPECrate®2026_int_peak = 818

SPECrate®2026_int_energy_peak = 81.0

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Base Results Table (Continued)

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
708.sqlite_r	640	533	634	463	61.3	868	1120	**532**	**635**	**463**	**61.2**	**870**	**1120**	532	636	461	61.5	867	1120
710.omnetpp_r	640	415	749	330	79.4	795	950	409	761	327	80.1	799	950	**413**	**754**	**329**	**79.5**	**798**	**957**
714.cpython_r	640	293	1050	256	100	873	1060	**293**	**1050**	**256**	**99.9**	**874**	**1090**	294	1040	258	99.5	876	1080
721.gcc_r	640	748	587	603	61.3	806	913	750	586	603	61.4	804	910	**748**	**587**	**601**	**61.5**	**803**	**913**
723.llvm_r	640	425	763	362	75.1	852	920	**424**	**765**	**360**	**75.7**	**847**	**920**	424	765	360	75.6	848	922
727.cppcheck_r	640	345	666	307	62.8	891	1010	**345**	**667**	**306**	**63.0**	**888**	**1000**	345	667	306	63.1	888	1000
729.abc_r	640	468	628	381	64.5	815	966	**468**	**628**	**380**	**64.8**	**812**	**967**	467	629	380	64.8	813	963
734.vpr_r	640	**473**	**624**	**395**	**62.6**	**834**	**961**	472	625	394	62.7	835	964	475	622	394	62.6	831	958
735.gem5_r	640	308	1010	262	99.4	851	963	**306**	**1020**	**262**	**99.4**	**856**	**964**	306	1020	262	99.7	855	963
750.sealcrypto_r	640	**427**	**804**	**407**	**71.1**	**954**	**972**	427	804	405	71.4	950	970	426	805	406	71.4	952	971
753.ns3_r	640	**280**	**1400**	**246**	**134**	**876**	**939**	279	1400	245	135	876	940	280	1400	245	135	873	941
777.zstd_r	640	**869**	**474**	**691**	**50.0**	**795**	**920**	873	472	691	50.1	792	915	864	477	689	50.2	798	914

SPECrate®2026_int_base = 818

SPECrate®2026_int_energy_base = 81.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	640	395	2040	359	191	908	1070	**395**	**2040**	**362**	**189**	**918**	**1080**	392	2060	361	190	922	1070
707.ntest_r	640	413	917	314	101	760	804	**413**	**917**	**315**	**101**	**763**	**808**	412	919	316	101	766	807
708.sqlite_r	640	533	634	463	61.3	868	1120	**532**	**635**	**463**	**61.2**	**870**	**1120**	532	636	461	61.5	867	1120
710.omnetpp_r	640	415	749	330	79.4	795	950	409	761	327	80.1	799	950	**413**	**754**	**329**	**79.5**	**798**	**957**
714.cpython_r	640	293	1050	256	100	873	1060	**293**	**1050**	**256**	**99.9**	**874**	**1090**	294	1040	258	99.5	876	1080
721.gcc_r	640	748	587	603	61.3	806	913	750	586	603	61.4	804	910	**748**	**587**	**601**	**61.5**	**803**	**913**
723.llvm_r	640	425	763	362	75.1	852	920	**424**	**765**	**360**	**75.7**	**847**	**920**	424	765	360	75.6	848	922
727.cppcheck_r	640	345	666	307	62.8	891	1010	**345**	**667**	**306**	**63.0**	**888**	**1000**	345	667	306	63.1	888	1000
729.abc_r	640	468	628	381	64.5	815	966	**468**	**628**	**380**	**64.8**	**812**	**967**	467	629	380	64.8	813	963
734.vpr_r	640	**473**	**624**	**395**	**62.6**	**834**	**961**	472	625	394	62.7	835	964	475	622	394	62.6	831	958
735.gem5_r	640	308	1010	262	99.4	851	963	**306**	**1020**	**262**	**99.4**	**856**	**964**	306	1020	262	99.7	855	963
750.sealcrypto_r	640	**427**	**804**	**407**	**71.1**	**954**	**972**	427	804	405	71.4	950	970	426	805	406	71.4	952	971
753.ns3_r	640	**280**	**1400**	**246**	**134**	**876**	**939**	279	1400	245	135	876	940	280	1400	245	135	873	941
777.zstd_r	640	**869**	**474**	**691**	**50.0**	**795**	**920**	873	472	691	50.1	792	915	864	477	689	50.2	798	914

SPECrate®2026_int_peak = 818

SPECrate®2026_int_energy_peak = 81.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
```

(Continued on next page)

Submit Notes (Continued)

```
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_rate_aocc510_znver5_A_l
     ib/lib:/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_rate_aocc510_znve
     r5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Custom Mode
NUMA Nodes per Socket set to NPS2
```

(Continued on next page)

Platform Notes (Continued)

```
Core Performance Boost set to Disabled
Memory Speed set to 5200MHz
L1 Stride Prefetcher set to Disabled

 Sysinfo program /home/cpu2026-0.902.0-amd_aocc510_znver5_A1/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on localhost Tue Feb  3 22:06:40 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

 ------------------------------------------------------------
 2. w
    22:06:40 up 4 min,  1 user,  load average: 0.35, 0.57, 0.31
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6188806
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6188806
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.02.sh
 /bin/bash ./Run022-compliant-amd-rateint_base.sh
 python3 ./run_amd_rate_aocc510_znver5_A1.py
 /bin/bash ./amd_rate_aocc510_znver5_A1.sh
 runcpu --power --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
 runcpu --power --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --runmode
   rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.017/templogs/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-amd_aocc510_znver5_A1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9845 160-Core Processor
    vendor_id       : AuthenticAMD
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu family      : 26
     model           : 17
     stepping        : 0
     microcode       : 0xb10104f
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
     TLB size        : 192 4K pages
     cpu cores       : 160
     siblings        : 320
     2 physical ids (chips)
     640 processors (hardware threads)
     physical id 0: core ids 0-159
     physical id 1: core ids 0-159
     physical id 0: apicids 0-319
     physical id 1: apicids 512-831
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               640
   On-line CPU(s) list:                  0-639
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9845 160-Core Processor
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   160
   Socket(s):                            2
   Stepping:                             0
   CPU(s) scaling MHz:                   71%
   CPU max MHz:                          2100.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4193.82
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)

Platform Notes (Continued)

```
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                              perfctr_llc mwaitx cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs
                              ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep
                                 bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                               xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                              pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                              avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                              movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                 flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                                        amd_lbr_pmc_freeze
  Virtualization:                       AMD-V
  L1d cache:                            15 MiB (320 instances)
  L1i cache:                            10 MiB (320 instances)
  L2 cache:                             320 MiB (320 instances)
  L3 cache:                             640 MiB (20 instances)
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-79,320-399
  NUMA node1 CPU(s):                    80-159,400-479
  NUMA node2 CPU(s):                    160-239,480-559
  NUMA node3 CPU(s):                    240-319,560-639
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      15M   12 Data            1    64        1             64
     L1i       32K      10M    8 Instruction     1    64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
     L2          1M     320M   16 Unified         2  1024        1              64
     L3         32M     640M   16 Unified         3 32768        1              64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-79,320-399
  node 0 size: 386377 MB
  node 0 free: 385365 MB
  node 1 cpus: 80-159,400-479
  node 1 size: 387029 MB
  node 1 free: 385988 MB
  node 2 cpus: 160-239,480-559
  node 2 size: 387029 MB
  node 2 free: 385996 MB
  node 3 cpus: 240-319,560-639
  node 3 size: 386791 MB
  node 3 free: 385743 MB
  node distances:
  node   0   1   2   3
    0:  10  12  32  32
    1:  12  10  32  32
    2:  32  32  10  12
    3:  32  32  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584361980 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 3 22:03

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                   systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
```

(Continued on next page)

Platform Notes (Continued)

```
   enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                  firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                  kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                      systemd-timesyncd
   generated         ntp_sync
   indirect          systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
   root=UUID=6b4a02b3-a7c2-4def-af3d-b12e11842422
   splash=silent
   mitigations=auto
   quiet
   security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
   analyzing CPU 543:
     current policy: frequency should be within 1.50 GHz and 2.10 GHz.
                     The governor "ondemand" may decide which speed to use
                     within this range.
     boost state support:
       Supported: no
       Active: no

------------------------------------------------------------
15. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           0
   vm.compaction_proactiveness        20
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                      8
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
   vm.nr_hugepages                     0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2026-0.902.0-amd_aocc510_znver5_A1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs   444G  130G  315G  30% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR665 V3
    Product Family: ThinkSystem
    Serial:         1234567890

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)

Platform Notes (Continued)

```
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     4x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 5200
     9x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 5200
     10x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 5200
     1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400, configured at 5200


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      KAE141G-5.81
    BIOS Date:         01/22/2026
    BIOS Revision:     5.81
    Firmware Revision: 56.20
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
       | 753.ns3_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
       | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

706.stockfish_r: -DSPEC_LP64
707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

707.ntest_r: `basepeak = yes`

727.cppcheck_r: `basepeak = yes`

753.ns3_r: `basepeak = yes`

Benchmarks using both C and C++:

710.omnetpp_r: `basepeak = yes`

721.gcc_r: `basepeak = yes`

723.llvm_r: `basepeak = yes`

729.abc_r: `basepeak = yes`

734.vpr_r: `basepeak = yes`

735.gem5_r: `basepeak = yes`

750.sealcrypto_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.html`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.xml`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml`

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 09:06:39-0500.
Report generated on 2026-05-04 23:34:02 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.