SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(3.60 GHz, Intel Xeon 6724P)

SPECspeed®2026_int_base = 5.65

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

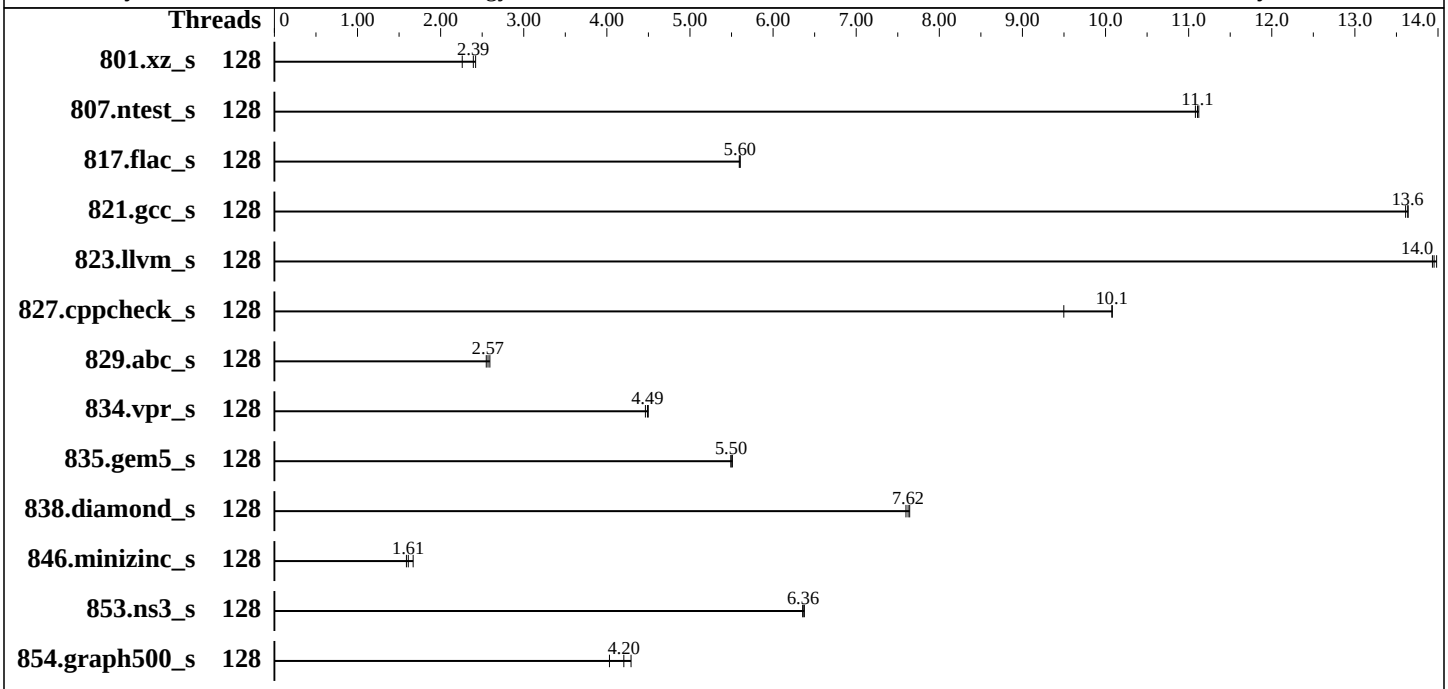

Hardware

CPU Name:	Intel Xeon 6724P
Max MHz:	4300
Nominal:	3600
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	72 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 960 GB M.2 NVME SSD
Cooling:	Air
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Lenovo BIOS Version RVE105I 1.20 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(3.60 GHz, Intel Xeon 6724P)

SPECspeed®2026_int_base = 5.65

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	128	**247**	**2.39**	262	2.26	244	2.42							
807.ntest_s	128	103	11.1	**103**	**11.1**	102	11.1							
817.flac_s	128	311	5.59	**310**	**5.60**	310	5.60							
821.gcc_s	128	152	13.6	152	13.6	**152**	**13.6**							
823.llvm_s	128	**101**	**14.0**	101	14.0	101	13.9							
827.cppcheck_s	128	111	10.1	118	9.50	**111**	**10.1**							
829.abc_s	128	321	2.59	**323**	**2.57**	326	2.55							
834.vpr_s	128	212	4.50	**213**	**4.49**	214	4.46							
835.gem5_s	128	**207**	**5.50**	207	5.51	207	5.49							
838.diamond_s	128	131	7.64	132	7.60	**131**	**7.62**							
846.minizinc_s	128	**416**	**1.61**	401	1.67	422	1.59							
853.ns3_s	128	181	6.38	181	6.36	**181**	**6.36**							
854.graph500_s	128	152	4.03	142	4.29	**145**	**4.20**							

SPECspeed®2026_int_base = 5.65

SPECspeed®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026-0.902.0-ic2025p3/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Workload Profile set to General Computing - Peak Frequency
Page Policy set to Adaptive

 Sysinfo program /home/cpu2026-0.902.0-ic2025p3/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on localhost Wed Feb  4 17:43:54 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

 ------------------------------------------------------------
 2. w
    17:43:54 up 3 min,  1 user,  load average: 0.50, 0.28, 0.12
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8255353
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8255353
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 sh Run542-compliant-ic2025.3-lin-sapphirerapids-speedint-base-smt-on-20260121.sh
 runcpu --nobuild --reportable --iterations=3 --action validate --define default-platform-flags -c
   ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 128 --define cores=64 --tune base -o
    all --define intspeedaffinity --define smt-on --define drop_caches intspeed
 runcpu --nobuild --reportable --iterations 3 --action validate --define default-platform-flags --configfile
   ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 128 --define cores=64 --tune base
   --output_format all --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode
    speed --tune base --size refspeed intspeed --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.010/templogs/preenv.intspeed.010.0.log --lognum 010.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-ic2025p3

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6724P
    vendor_id       : GenuineIntel
    cpu family      : 6
```

(Continued on next page)

Platform Notes (Continued)

```
     model           : 173
     stepping        : 1
     microcode       : 0x1000405
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
     cpu cores       : 16
     siblings        : 32
     4 physical ids (chips)
     128 processors (hardware threads)
     physical id 0: core ids 0-15
     physical id 1: core ids 0-15
     physical id 2: core ids 0-15
     physical id 3: core ids 0-15
     physical id 0: apicids 0-31
     physical id 1: apicids 128-159
     physical id 2: apicids 256-287
     physical id 3: apicids 384-415
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                            x86_64
   CPU op-mode(s):                          32-bit, 64-bit
   Address sizes:                           52 bits physical, 57 bits virtual
   Byte Order:                              Little Endian
   CPU(s):                                  128
   On-line CPU(s) list:                     0-127
   Vendor ID:                               GenuineIntel
   Model name:                              Intel(R) Xeon(R) 6724P
   CPU family:                              6
   Model:                                   173
   Thread(s) per core:                      2
   Core(s) per socket:                      16
   Socket(s):                               4
   Stepping:                                1
   BogoMIPS:                                7200.00
   Flags:                                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                            pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                            pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                            nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                            pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                            xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                            tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                            3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                            ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
```

(Continued on next page)

Platform Notes (Continued)

```
                                vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                 rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                 intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                     xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                 vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                          amx_int8 flush_l1d arch_capabilities
  Virtualization:                         VT-x
  L1d cache:                              3 MiB (64 instances)
  L1i cache:                              4 MiB (64 instances)
  L2 cache:                               128 MiB (64 instances)
  L3 cache:                               288 MiB (4 instances)
  NUMA node(s):                           4
  NUMA node0 CPU(s):                      0-15,64-79
  NUMA node1 CPU(s):                      16-31,80-95
  NUMA node2 CPU(s):                      32-47,96-111
  NUMA node3 CPU(s):                      48-63,112-127
  Vulnerability Gather data sampling:     Not affected
  Vulnerability Itlb multihit:            Not affected
  Vulnerability L1tf:                     Not affected
  Vulnerability Mds:                      Not affected
  Vulnerability Meltdown:                 Not affected
  Vulnerability Mmio stale data:          Not affected
  Vulnerability Reg file data sampling:   Not affected
  Vulnerability Retbleed:                 Not affected
  Vulnerability Spec rstack overflow:     Not affected
  Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                          PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsx async abort:          Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       64K       4M   16 Instruction     1    64        1             64
     L2         2M     128M   16 Unified         2  2048        1             64
     L3        72M     288M   16 Unified         3 73728        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 cpus: 0-15,64-79
  node 0 size: 515650 MB
  node 0 free: 514620 MB
  node 1 cpus: 16-31,80-95
  node 1 size: 516087 MB
  node 1 free: 514941 MB
  node 2 cpus: 32-47,96-111
  node 2 size: 516087 MB
  node 2 free: 515201 MB
  node 3 cpus: 48-63,112-127
  node 3 size: 516041 MB
  node 3 free: 514976 MB
  node distances:
  node   0   1   2   3
    0:  10  21  21  21
    1:  21  10  21  21
    2:  21  21  10  21
    3:  21  21  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113398248 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 4 17:41

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
                     wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                    man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
                     vncserver@
```

(Continued on next page)

Platform Notes (Continued)

```
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=5a678bc4-a730-4b05-8b78-acf3aaaa7251
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 111:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026-0.902.0-ic2025p3
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 xfs   854G   99G  756G  12% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SR860 V4
    Product Family: ThinkSystem
    Serial:          9876543210

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     11x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
     18x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
     3x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      RVE105I-1.20
    BIOS Date:         12/16/2025
    BIOS Revision:     1.20
    Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
       | 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
       | 846.minizinc_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Benchmarks using both C and C++:
`icpx icx`

Base Portability Flags

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -DSPEC_LP64
835.gem5_s: -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

807.ntest_s: -m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

827.cppcheck_s: -m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

853.ns3_s: -m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

801.xz_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto

(Continued on next page)

Base Optimization Flags (Continued)

801.xz_s (continued):
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

817.flac_s: Same as 801.xz_s

821.gcc_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

823.llvm_s: Same as 801.xz_s

829.abc_s: Same as 821.gcc_s

834.vpr_s: Same as 821.gcc_s

835.gem5_s: Same as 801.xz_s

838.diamond_s: Same as 801.xz_s

846.minizinc_s: Same as 801.xz_s

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.html
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.xml
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-04 04:43:53-0500.
Report generated on 2026-05-04 23:34:24 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.