



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro


CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

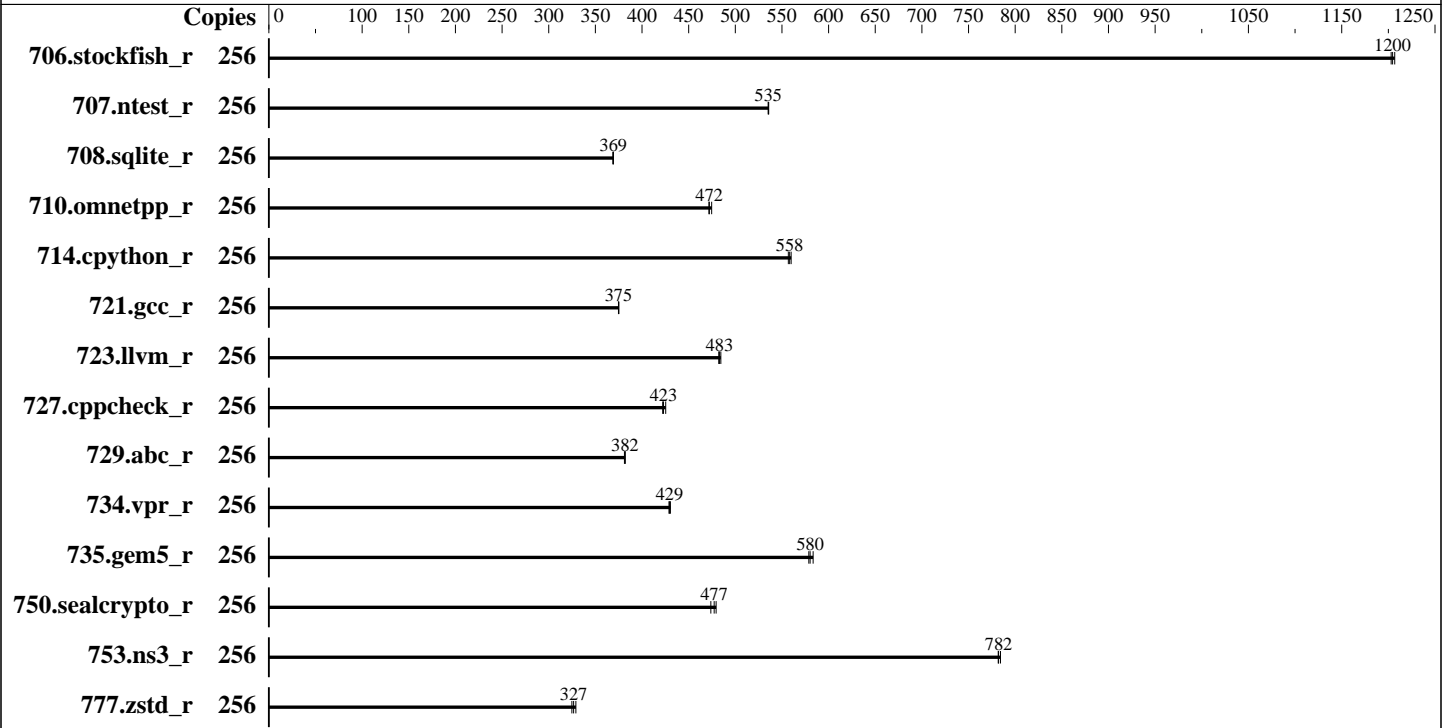

Hardware

CPU Name: AMD EPYC 9755
Max MHz: 4100
Nominal: 2700
Enabled: 128 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Cooling: Air
Other: None

Software

OS: Ubuntu 24.04.3 LTS
6.8.0-90-generic
Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category: Vendor
Firmware: Version 1.5a released Aug-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	256	268	1200	268	1200	267	1210	256	268	1200	268	1200	267	1210
707.ntest_r	256	283	536	283	535	283	535	256	283	536	283	535	283	535
708.sqlite_r	256	366	369	366	369	367	369	256	366	369	366	369	367	369
710.omnetpp_r	256	263	472	262	475	264	472	256	263	472	262	475	264	472
714.cpython_r	256	220	557	220	558	219	560	256	220	557	220	558	219	560
721.gcc_r	256	469	375	468	375	469	375	256	469	375	468	375	469	375
723.llvm_r	256	269	482	268	484	269	483	256	269	482	268	484	269	483
727.cppcheck_r	256	217	423	218	422	216	425	256	217	423	218	422	216	425
729.abc_r	256	308	381	308	382	308	382	256	308	381	308	382	308	382
734.vpr_r	256	275	429	274	430	275	429	256	275	429	274	430	275	429
735.gem5_r	256	215	579	215	580	214	583	256	215	579	215	580	214	583
750.sealcrypto_r	256	290	474	287	477	286	479	256	290	474	287	477	286	479
753.ns3_r	256	201	782	201	782	200	784	256	201	782	201	782	200	784
777.zstd_r	256	508	325	505	327	501	329	256	508	325	505	327	501	329

SPECrate®2026_int_base = **497**

SPECrate®2026_int_peak = **497**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/spec/speccpu2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib:/spec/speccp
u2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS settings:
SEV Control = Disabled
SMEE = Disabled
Memory Target Speed = DDR6400
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 500
Package Power Limit Control = Manual
Package Power Limit = 500
TSME = Disabled
NUMA nodes per socket = NPS4

Sysinfo program /spec/speccpu2026rc2bsub/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on smc2348turin-os Sat Jan 31 00:03:11 2026

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
```

```
2. w
00:03:11 up 4:13, 2 users, load average: 0.00, 0.07, 0.37
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
amd       -        172.31.137.186 21:16      2:40m      0.00s     0.02s     sshd: amd [priv]
amd       tty1     -             19:54      4:09m      0.08s     0.01s     -bash
```

```
3. Username
From environment variable $USER: root
From the command 'logname':    amd
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	3093693
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

5. sysinfo process ancestry

```

/sbin/init
SCREEN -S cpu
/bin/bash
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templots/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/speccpu2026rc2bsub

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9755 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002147
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 128
siblings       : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 0: apicids 0-255

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:        0-255
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:             Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9755 128-Core Processor
BIOS Model name:            AMD EPYC 9755 128-Core Processor          Unknown CPU @ 2.7GHz
BIOS CPU family:            107
CPU family:                  26
Model:                       2
Thread(s) per core:         2
Core(s) per socket:         128
Socket(s):                   1
Stepping:                    1
Frequency boost:             enabled
CPU(s) scaling MHz:         101%
CPU max MHz:                 2700.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    5400.16
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                             smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                             xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                             svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                             pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                             vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                             avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                             movdiri movdir64b overflow_recov succor smca fsmr avx512_vp2intersect
                             flush_l1d debug_swap
L1d cache:                   6 MiB (128 instances)
L1i cache:                   4 MiB (128 instances)
L2 cache:                    128 MiB (128 instances)
L3 cache:                    512 MiB (16 instances)
NUMA node(s):                4

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

NUMA node0 CPU(s):          0-31,128-159
NUMA node1 CPU(s):          32-63,160-191
NUMA node2 CPU(s):          64-95,192-223
NUMA node3 CPU(s):          96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape:        Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 193072 MB
node 0 free: 191114 MB
node 1 cpus: 32-63,160-191
node 1 size: 193470 MB
node 1 free: 191567 MB
node 2 cpus: 64-95,192-223
node 2 size: 193514 MB
node 2 free: 191670 MB
node 3 cpus: 96-127,224-255
node 3 size: 193443 MB
node 3 free: 191738 MB
node distances:
node  0  1  2  3
0:  10 12 12 12

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
1: 12 10 12 12
2: 12 12 10 12
3: 12 12 12 10
```

9. /proc/meminfo
MemTotal: 792065124 kB

10. who -r
run-level 5 Jan 30 19:50

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
generated	openipmi
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-90-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

14. cpupower frequency-info
analyzing CPU 111:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

current policy: frequency should be within 1.50 GHz and 2.70 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2700MHz

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

19. Disk information

SPEC is set to: /spec/speccpu2026rc2bsub

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	25G	394G	6%	/

20. /sys/devices/virtual/dmi/id

Vendor: Supermicro
Product: AS -1116CS-TN
Product Family: SMC H14
Serial: S931316X4B12348

21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x SK Hynix HMC94AHBRA277N 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.5a
BIOS Date: 08/11/2025
BIOS Revision: 5.35

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
| 753.ns3_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
| 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

706.stockfish_r: -DSPEC_LP64
707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Base Portability Flags (Continued)

727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate®2026_int_base = 497

SPECrate®2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Peak Optimization Flags

C benchmarks:

- 708.sqlite_r: basepeak = yes
- 714.cpython_r: basepeak = yes
- 777.zstd_r: basepeak = yes

C++ benchmarks:

- 706.stockfish_r: basepeak = yes
- 707.ntest_r: basepeak = yes
- 727.cppcheck_r: basepeak = yes
- 753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

- 710.omnetpp_r: basepeak = yes
- 721.gcc_r: basepeak = yes
- 723.llvm_r: basepeak = yes
- 729.abc_r: basepeak = yes
- 734.vpr_r: basepeak = yes
- 735.gem5_r: basepeak = yes
- 750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.xml>



SPEC CPU[®]2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9755)

SPECrate[®]2026_int_base = 497

SPECrate[®]2026_int_peak = 497

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2026 v0.902.0 on 2026-01-30 19:03:11-0500.
Report generated on 2026-05-11 16:38:41 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.