



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

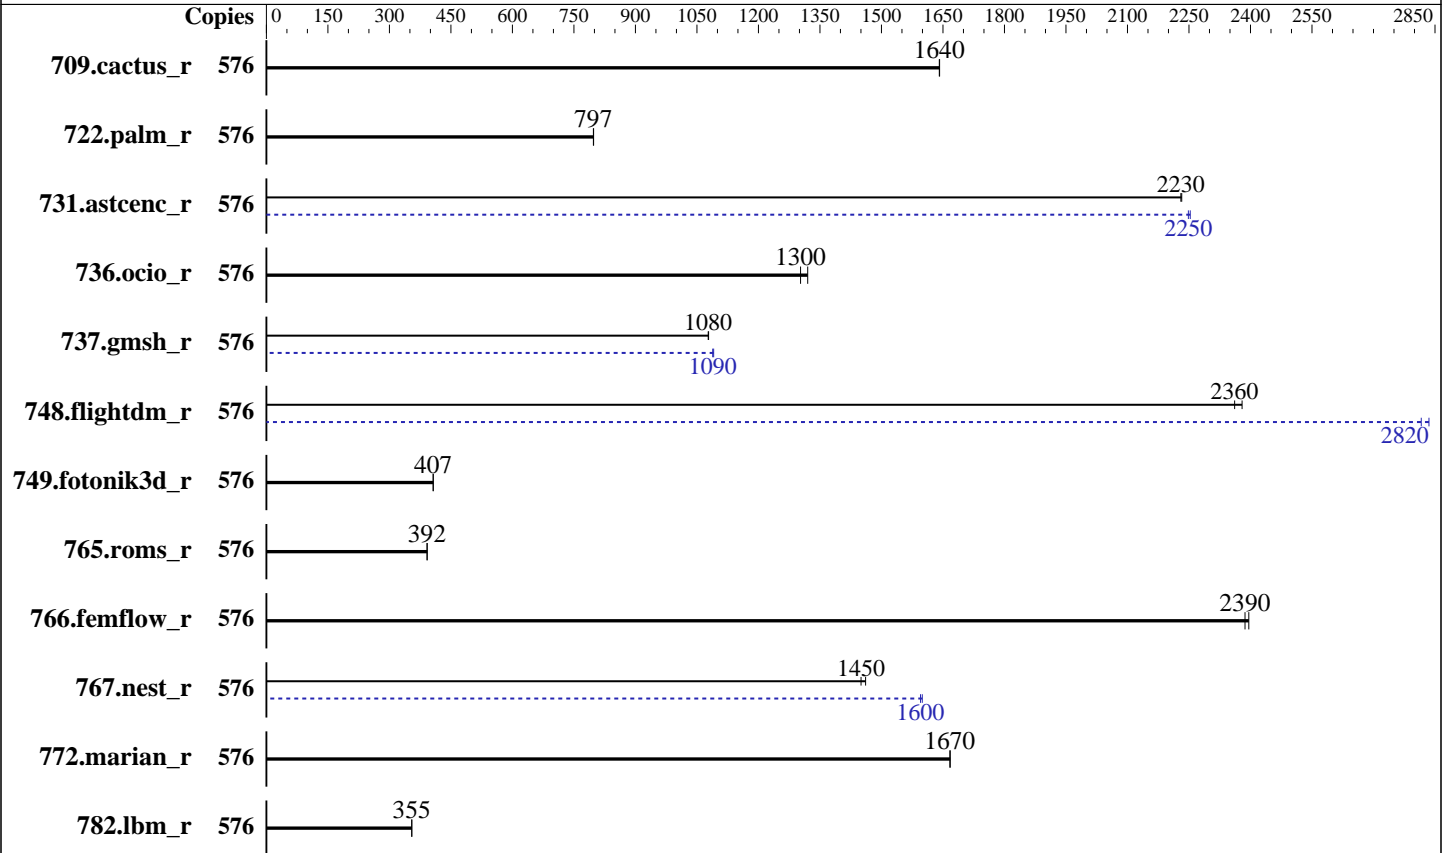

Hardware

CPU Name: Intel Xeon 6990E+
 Max MHz: 3200
 Nominal: 2200
 Enabled: 576 cores, 2 chips
 Orderable: 1, 2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 576 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-8000B-R)
 Storage: 1 x 1.92TB NVMe SSD
 Cooling: DLC
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
 6.4.0-150700.51-default
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2026.0 of Intel Fortran
 Compiler for Linux
 Compiler Category: Vendor
 Firmware: Version 2.0 released May-2026
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	576	301	1640	301	1640			576	301	1640	301	1640		
722.palm_r	576	953	797	953	798			576	953	797	953	798		
731.ascenc_r	576	217	2230	217	2230			576	215	2250	215	2250		
736.ocio_r	576	387	1300	382	1320			576	387	1300	382	1320		
737.gmsh_r	576	245	1080	245	1080			576	242	1090	243	1090		
748.flightdm_r	576	175	2360	173	2380			576	145	2840	146	2820		
749.fotonik3d_r	576	1637	407	1637	407			576	1637	407	1637	407		
765.roms_r	576	2316	392	2313	392			576	2316	392	2313	392		
766.femflow_r	576	353	2400	354	2390			576	353	2400	354	2390		
767.nest_r	576	315	1450	313	1460			576	286	1600	286	1600		
772.marian_r	576	545	1670	546	1670			576	545	1670	546	1670		
782.lbm_r	576	931	355	931	355			576	931	355	931	355		

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance

sysinfo program /home/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on Wed May 13 20:24:52 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -srvm
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
-----
```

```
2. w
 20:24:52 up 4:21, 1 user, load average: 151.56, 429.09, 492.09
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU  WHAT
root      tty1     -              16:05       4:18m      1.69s     0.03s  -bash
-----
```

```
3. Username
From environment variable $USER: root
-----
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6189164
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6189164
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 576 -c
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=288
-----
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
-o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 576 --configfile
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=288
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.004/templogs/preenv.fprate.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6990E+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappgs
cpu cores     : 288
siblings      : 288
2 physical ids (chips)
576 processors (hardware threads)
physical id 0: core ids 0-95,128-223,256-351
physical id 1: core ids 0-95,128-223,256-351
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300
, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352,
354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 4
06, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 512, 514, 516, 518, 520, 52
2, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574
, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626,
628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 6
80, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702
physical id 1: apicids
1024, 1026, 1028, 1030, 1032, 1034, 1036, 1038, 1040, 1042, 1044, 1046, 1048, 1050, 1052, 1054, 1056, 1058, 1060, 1062, 1064,
1066, 1068, 1070, 1072, 1074, 1076, 1078, 1080, 1082, 1084, 1086, 1088, 1090, 1092, 1094, 1096, 1098, 1100, 1102, 1104, 1106,
1108, 1110, 1112, 1114, 1116, 1118, 1120, 1122, 1124, 1126, 1128, 1130, 1132, 1134, 1136, 1138, 1140, 1142, 1144, 1146, 1148,
1150, 1152, 1154, 1156, 1158, 1160, 1162, 1164, 1166, 1168, 1170, 1172, 1174, 1176, 1178, 1180, 1182, 1184, 1186, 1188, 1190,
1192, 1194, 1196, 1198, 1200, 1202, 1204, 1206, 1208, 1210, 1212, 1214, 1280, 1282, 1284, 1286, 1288, 1290, 1292, 1294, 1296,
1298, 1300, 1302, 1304, 1306, 1308, 1310, 1312, 1314, 1316, 1318, 1320, 1322, 1324, 1326, 1328, 1330, 1332, 1334, 1336, 1338,
1340, 1342, 1344, 1346, 1348, 1350, 1352, 1354, 1356, 1358, 1360, 1362, 1364, 1366, 1368, 1370, 1372, 1374, 1376, 1378, 1380,
1382, 1384, 1386, 1388, 1390, 1392, 1394, 1396, 1398, 1400, 1402, 1404, 1406, 1408, 1410, 1412, 1414, 1416, 1418, 1420, 1422,

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

1424,1426,1428,1430,1432,1434,1436,1438,1440,1442,1444,1446,1448,1450,1452,1454,1456,1458,1460,1462,1464,1466,1468,1470,1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,1562,1564,1566,1568,1570,1572,1574,1576,1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1600,1602,1604,1606,1608,1610,1612,1614,1616,1618,1620,1622,1624,1626,1628,1630,1632,1634,1636,1638,1640,1642,1644,1646,1648,1650,1652,1654,1656,1658,1660,1662,1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,1684,1686,1688,1690,1692,1694,1696,1698,1700,1702,1704,1706,1708,1710,1712,1714,1716,1718,1720,1722,1724,1726

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                576
On-line CPU(s) list:   0-575
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6990E+
CPU family:            6
Model:                 221
Thread(s) per core:    1
Core(s) per socket:    288
Socket(s):             2
Stepping:              1
BogoMIPS:              4400.00
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi unip
pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
arch_lbr ibt flush_lld arch_capabilities
```

```
Virtualization:        VT-x
L1d cache:             18 MiB (576 instances)
L1i cache:             36 MiB (576 instances)
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

L2 cache:                    576 MiB (144 instances)
L3 cache:                    1.1 GiB (2 instances)
NUMA node(s):                6
NUMA node0 CPU(s):          0-95
NUMA node1 CPU(s):          96-191
NUMA node2 CPU(s):          192-287
NUMA node3 CPU(s):          288-383
NUMA node4 CPU(s):          384-479
NUMA node5 CPU(s):          480-575
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:            Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data:  Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:        Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:       Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	18M	8	Data	1	64	1	64
L1i	64K	36M	8	Instruction	1	128	1	64
L2	4M	576M	16	Unified	2	4096	1	64
L3	576M	1.1G	16	Unified	3	589824	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 6 nodes (0-5)
node 0 cpus: 0-95
node 0 size: 257400 MB
node 0 free: 235788 MB
node 1 cpus: 96-191
node 1 size: 258022 MB
node 1 free: 236805 MB
node 2 cpus: 192-287
node 2 size: 258022 MB
node 2 free: 236797 MB
node 3 cpus: 288-383
node 3 size: 257983 MB

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

node 3 free: 237109 MB
node 4 cpus: 384-479
node 4 size: 258022 MB
node 4 free: 236990 MB
node 5 cpus: 480-575
node 5 size: 257867 MB
node 5 free: 236963 MB
node distances:
node  0  1  2  3  4  5
  0:  10 15 17 21 28 26
  1:  15 10 15 23 26 23
  2:  17 15 10 26 23 21
  3:  21 28 26 10 15 17
  4:  23 26 23 15 10 15
  5:  26 23 21 17 15 10

```

```

-----
9. /proc/meminfo
   MemTotal:          1584455504 kB

```

```

-----
10. who -r
    run-level 3 May 13 16:05

```

```

-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                  display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd
                  nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd
                  sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled          accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                  ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
                  exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                  ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd
                  serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
indirect          systemd-userdbd wickedd

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=a01dde6d-ca13-4c27-8508-91fa7301d7f7
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 123:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs    60000
    defrag                    1
    max_ptes_none            511
    max_ptes_shared          256
    max_ptes_swap            64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

```

```

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP7

```

```

-----
19. Disk information
    SPEC is set to: /home/cpu2026
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3  xfs   800G  155G  645G  20% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Supermicro
    Product:         Super Server
    Product Family:  Family
    Serial:          0123456789

```

```

-----
21. dmidecode
    Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
    24x Samsung MDRR644QEBC2-5R000 64 GB 2 rank 8000

```

```

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:     American Megatrends International, LLC.
    BIOS Version:    2.0
    BIOS Date:       05/06/2026
    BIOS Revision:   5.35

```



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL, Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Compiler Version Notes

=====
C | 782.lbm_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++ | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
| 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
767.nest_r(base, peak) 772.marian_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Peak Portability Flags

737.gmsh_r: -fno-associative-math

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-122HA-TN-LCC
(X14DBM-APL , Intel Xeon 6990E+)

SPECrate®2026_fp_base = 1100

SPECrate®2026_fp_peak = 1130

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Peak Optimization Flags (Continued)

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

```
737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-13 23:24:52-0400.
Report generated on 2026-06-04 10:14:17 by CPU2026 PDF formatter (unknown).
Originally published on 2026-06-04.