



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

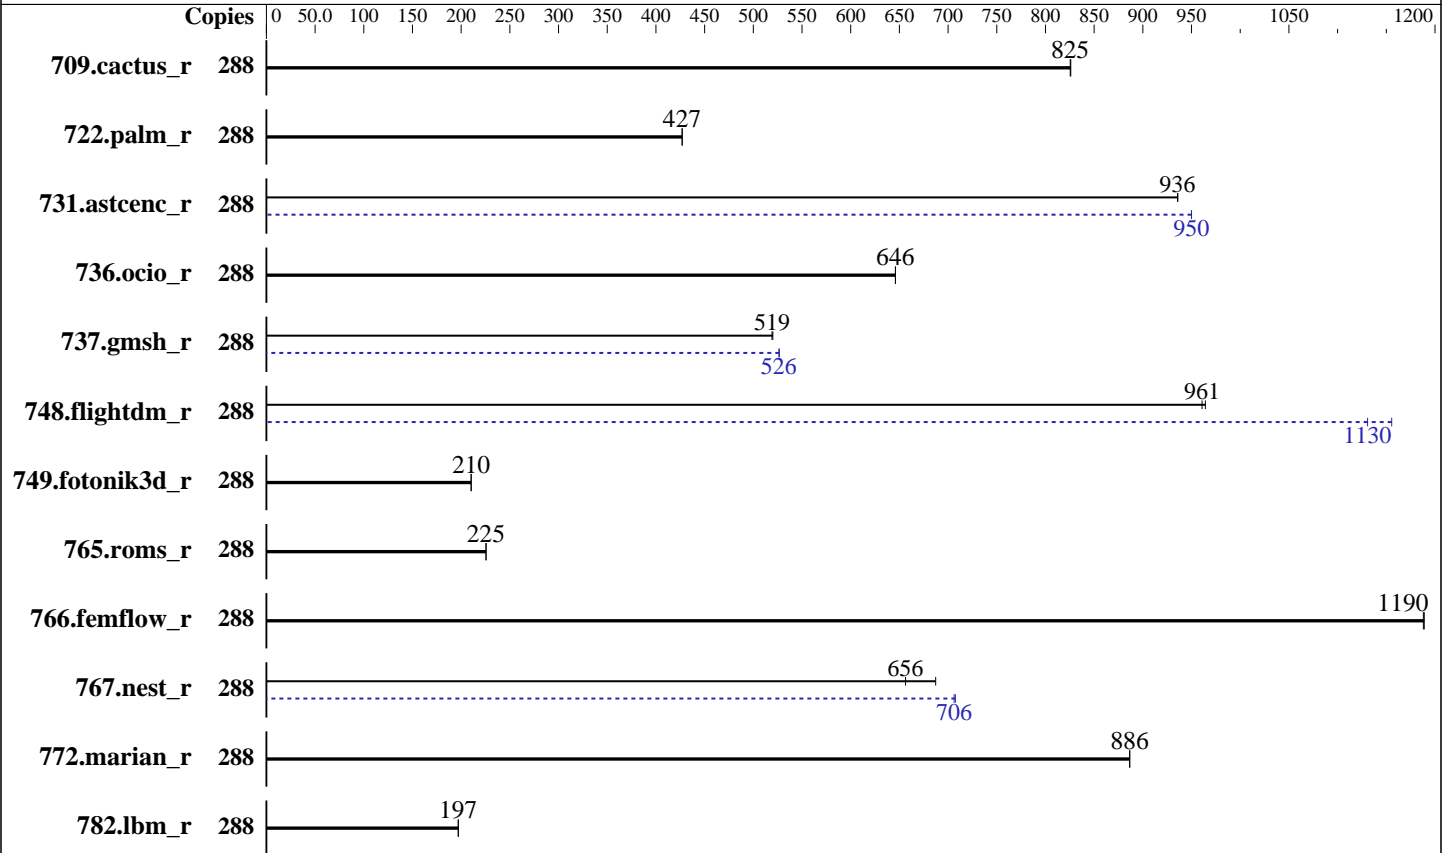

### Hardware

CPU Name: Intel Xeon 6990E+  
 Max MHz: 3200  
 Nominal: 2200  
 Enabled: 288 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 288 MB I+D on chip per chip, 4 MB shared / 4 cores  
 L3: 576 MB I+D on chip per chip  
 Other: None  
 Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.7  
 Kernel 5.14.0-611.5.1.el9\_7.x86\_64  
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.5b released May-2026  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.3.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

CPU2026 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: May-2026  
Hardware Availability: Jun-2026  
Software Availability: Apr-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	288	<b>299</b>	<b>825</b>	299	826			288	<b>299</b>	<b>825</b>	299	826		
722.palm_r	288	890	427	<b>891</b>	<b>427</b>			288	890	427	<b>891</b>	<b>427</b>		
731.ascenc_r	288	258	936	<b>259</b>	<b>936</b>			288	255	950	<b>255</b>	<b>950</b>		
736.ocio_r	288	390	646	<b>390</b>	<b>646</b>			288	390	646	<b>390</b>	<b>646</b>		
737.gmsh_r	288	<b>255</b>	<b>519</b>	254	520			288	<b>251</b>	<b>526</b>	251	527		
748.flightdm_r	288	<b>215</b>	<b>961</b>	214	964			288	<b>182</b>	<b>1130</b>	178	1160		
749.fotonik3d_r	288	1583	210	<b>1584</b>	<b>210</b>			288	1583	210	<b>1584</b>	<b>210</b>		
765.roms_r	288	<b>2012</b>	<b>225</b>	2011	226			288	<b>2012</b>	<b>225</b>	2011	226		
766.femflow_r	288	<b>356</b>	<b>1190</b>	355	1190			288	<b>356</b>	<b>1190</b>	355	1190		
767.nest_r	288	332	687	<b>348</b>	<b>656</b>			288	323	707	<b>323</b>	<b>706</b>		
772.marian_r	288	513	887	<b>513</b>	<b>886</b>			288	513	887	<b>513</b>	<b>886</b>		
782.lbm_r	288	<b>838</b>	<b>197</b>	837	197			288	<b>838</b>	<b>197</b>	837	197		

SPECrate®2026\_fp\_base = **545**

SPECrate®2026\_fp\_peak = **557**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2026/lib"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the CentOS Stream 9, and the system compiler gcc 11.5.0 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS settings:  
Workload Profile = HPC  
KTI Prefetch = Enable  
Stale AtoS = Disable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2026/bin/sysinfo  
Rev: 779ab21020787073335a329f3a45e2cd  
running on Fri May 15 20:38:49 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -srvm
Linux 5.14.0-611.5.1.el9_7.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Oct 17 14:16:35 EDT 2025 x86_64
-----
```

```
2. w
 20:38:49 up 4:42, 1 user, load average: 103.48, 230.72, 259.42
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    16:11   4:27m  1.48s  0.01s -bash
-----
```

```
3. Username
From environment variable $USER: root
-----
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4639996
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4639996
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
-----
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-----
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 -c
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
-o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 --configfile
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6990E+
vendor_id      : GenuineIntel
cpu family      : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappgs bhi spectre_v2_user
cpu cores      : 288
siblings       : 288
1 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-95,128-223,256-351
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300
,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,
354,356,358,360,362,364,366,368,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,4
06,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,512,514,516,518,520,52
2,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574
,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,
628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,6
80,682,684,686,688,690,692,694,696,698,700,702

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```

-----
7. lscpu

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 48 bits virtual
Byte Order:                  Little Endian
CPU(s):                       288
On-line CPU(s) list:         0-287
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6990E+
BIOS Model name:             Intel(R) Xeon(R) 6990E+
CPU family:                   6
Model:                       221
Thread(s) per core:          1
Core(s) per socket:          288
Socket(s):                   1
Stepping:                    1
BogoMIPS:                    4400.00

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pplb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
arch_lbr ibt flush_l1d arch_capabilities

```

```

Virtualization:              VT-x
L1d cache:                   9 MiB (288 instances)
L1i cache:                   18 MiB (288 instances)
L2 cache:                    288 MiB (72 instances)
L3 cache:                    576 MiB (1 instance)
NUMA node(s):                3
NUMA node0 CPU(s):           0-95
NUMA node1 CPU(s):           96-191
NUMA node2 CPU(s):           192-287
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	576M	576M	16	Unified	3	589824	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-95
node 0 size: 385994 MB
node 0 free: 361274 MB
node 1 cpus: 96-191
node 1 size: 387047 MB
node 1 free: 362955 MB
node 2 cpus: 192-287
node 2 size: 387021 MB
node 2 free: 362786 MB
node distances:
node    0    1    2
 0:   10   15   17
 1:   15   10   15
 2:   17   15   10

```

9. /proc/meminfo

MemTotal: 1187904808 kB

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

10. who -r  
run-level 3 May 15 15:56

-----  
11. Systemd service manager version: systemd 252 (252-55.e19)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chrynyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chryny-wait chrynyd-restricted cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit iprupdate iscsi-init iscsid iscsiui kpatch kvm_stat ledmon lvm-devices-import man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables nvme-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-sysexct tuned-ppd wpa_supplicant
indirect	iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.e19\_7.x86\_64  
root=/dev/mapper/rhel\_135--180--133-root  
ro  
resume=/dev/mapper/rhel\_135--180--133-swap  
rd.lvm.lv=rhel\_135-180-133/root  
rd.lvm.lv=rhel\_135-180-133/swap  
rhgb  
quiet  
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

-----  
14. cpupower frequency-info  
analyzing CPU 111:

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

#### 19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.7 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.7 (Plow)
system-release  Red Hat Enterprise Linux release 9.7 (Plow)
```

#### 20. Disk information

```
SPEC is set to: /home/cpu2026
Filesystem                                Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel_135--180--133-home xfs   372G  96G  277G  26% /home
```

#### 21. /sys/devices/virtual/dmi/id

```
Vendor:      Supermicro
Product:     Super Server
Product Family: Family
Serial:      0123456789
```

#### 22. dmidecode

Additional information from dmidecode 3.6 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  12x SK Hynix HMC4M4AMBRB970N 96 GB 2 rank 8000
```

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.5b
BIOS Date:        05/04/2026
BIOS Revision:    5.35
```

### Compiler Version Notes

```
=====  
C      | 782.lbm_r(base, peak)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Compiler Version Notes (Continued)

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====  
C++      | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)  
         | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)  
         | 767.nest_r(base, peak) 772.marian_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====  
C++, C   | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====  
Fortran  | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,  
         | peak)  
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Base Portability Flags

737.gmsh\_r: -fno-associative-math

## Base Optimization Flags

### C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

### C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

### Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

### Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

## Peak Compiler Invocation

### C benchmarks:

icx

### C++ benchmarks:

icpx

### Fortran benchmarks:

ifx

### Benchmarks using both C and C++:

icpx icx



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Portability Flags

737.gmsh\_r: -fno-associative-math

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.astcenc\_r: -m64 -std=c++17 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio\_r: basepeak = yes

748.flightdm\_r: Same as 731.astcenc\_r

766.femflow\_r: basepeak = yes

767.nest\_r: Same as 731.astcenc\_r

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6990E+)

SPECrate®2026\_fp\_base = 545

SPECrate®2026\_fp\_peak = 557

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Optimization Flags (Continued)

737.gmsh\_r (continued):

```
-ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-15 08:38:48-0400.  
Report generated on 2026-06-04 10:14:17 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-06-04.