SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2026_int_base = 737

SPECrate®2026_int_peak = 771

CPU2026 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: May-2026
Hardware Availability: Apr-2025
Software Availability: Mar-2026

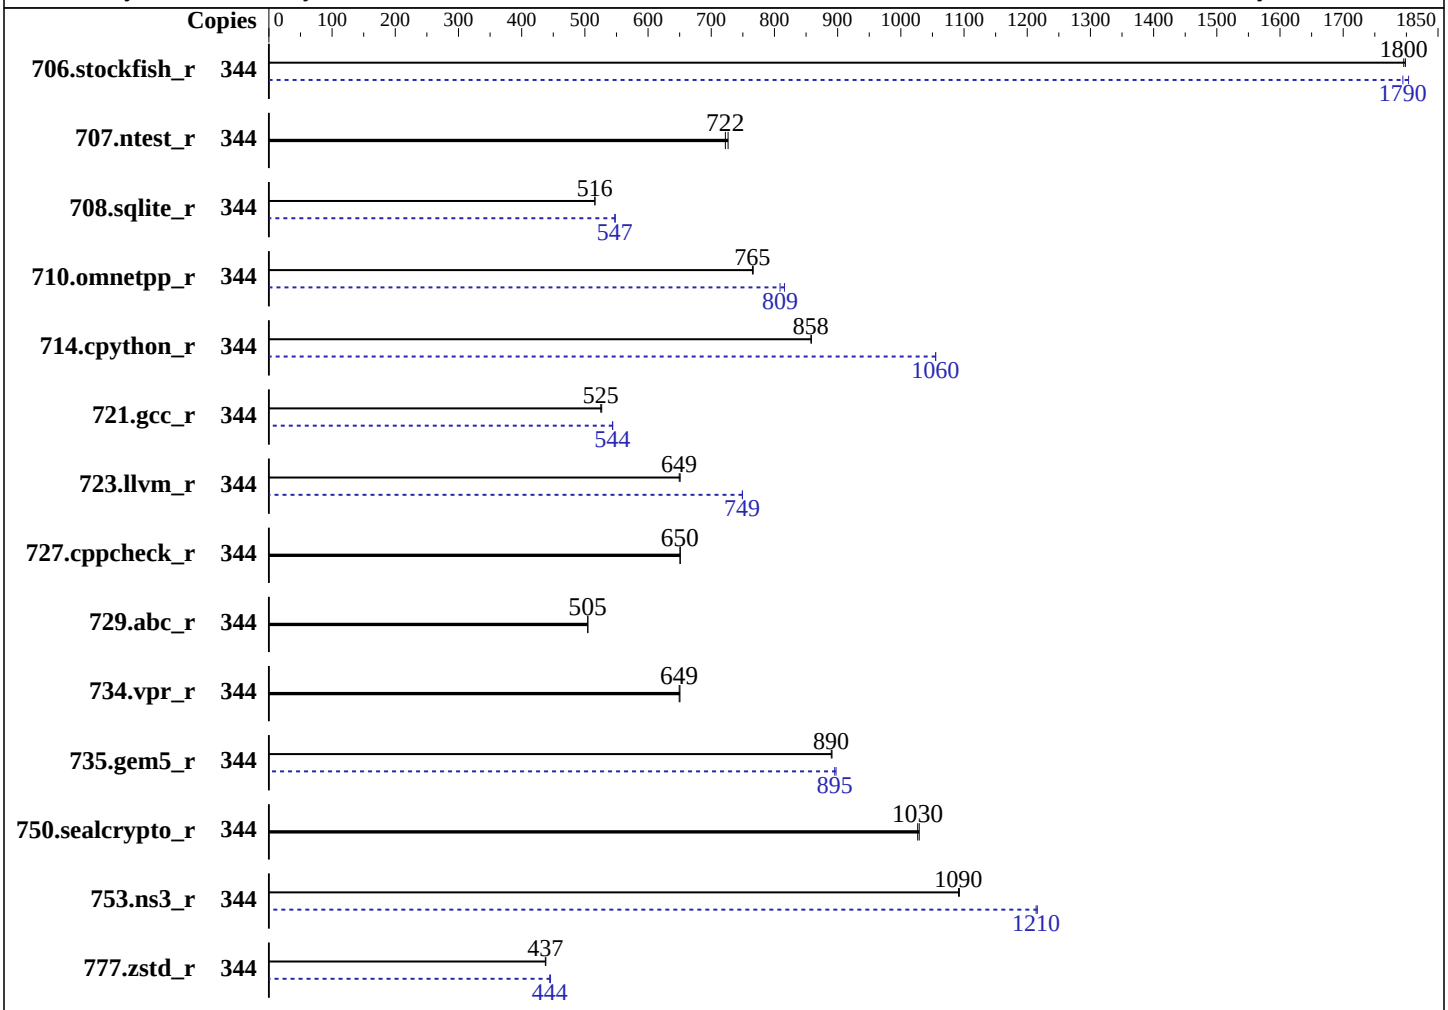

Hardware

CPU Name:	Intel Xeon 6787P
Max MHz:	3800
Nominal:	2000
Enabled:	172 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage:	1 x 1 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15.7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Version 04.01.00 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

meta brain NF5280G8 (Intel Xeon 6787P)

SPECrate®2026_int_base = 737

SPECrate®2026_int_peak = 771

CPU2026 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: May-2026
Hardware Availability: Apr-2025
Software Availability: Mar-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	344	241	1800	**241**	**1800**			344	240	1800	**242**	**1790**		
707.ntest_r	344	**282**	**722**	280	727			344	**282**	**722**	280	727		
708.sqlite_r	344	**352**	**516**	352	516			344	**332**	**547**	331	548		
710.omnetpp_r	344	**218**	**765**	218	766			344	205	816	**207**	**809**		
714.cpython_r	344	**192**	**858**	192	858			344	156	1060	**156**	**1060**		
721.gcc_r	344	**449**	**525**	448	527			344	434	544	**434**	**544**		
723.llvm_r	344	**269**	**649**	268	651			344	**233**	**749**	233	749		
727.cppcheck_r	344	190	651	**190**	**650**			344	190	651	**190**	**650**		
729.abc_r	344	313	505	**313**	**505**			344	313	505	**313**	**505**		
734.vpr_r	344	244	650	**244**	**649**			344	244	650	**244**	**649**		
735.gem5_r	344	**188**	**890**	188	891			344	**187**	**895**	187	897		
750.sealcrypto_r	344	**180**	**1030**	179	1030			344	**180**	**1030**	179	1030		
753.ns3_r	344	193	1090	**193**	**1090**			344	**174**	**1210**	173	1220		
777.zstd_r	344	505	438	**506**	**437**			344	497	446	**499**	**444**		

SPECrate®2026_int_base = 737

SPECrate®2026_int_peak = 771

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
SNC set to Enabled
VT Support set to Disable
Hardware P-states set to Disable
OS configuration:
Tuned-adm was set to throughput-performance using â  tuned-adm profile throughput-performanceâ

Sysinfo program /home/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Thu May 21 00:00:44 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
 2. w
    00:00:44 up  2:06,  1 user,  load average: 0.30, 0.10, 10.79
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                06May25 12.00s  1.41s  0.01s sh
   reportable-ic2026.0-lin-sapphirerapids-rate-smt-on-20260429.sh

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4123784
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4123784
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
```

(Continued on next page)

Platform Notes (Continued)

```
 /usr/lib/systemd/systemd --switched-root --system --deserialize=31
 login -- root
 -bash
 sh reportable-ic2026.0-lin-sapphirerapids-rate-smt-on-20260429.sh
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
   ic2026.0-sapphirerapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
   ic2026.0-sapphirerapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
   --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003d0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 86
    siblings        : 172
    2 physical ids (chips)
    344 processors (hardware threads)
    physical id 0: core ids 0-42,64-106
    physical id 1: core ids 0-42,64-106
    physical id 0: apicids 0-85,128-213
    physical id 1: apicids 256-341,384-469
 Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               344
  On-line CPU(s) list:                  0-343
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6787P
```

(Continued on next page)

Platform Notes (Continued)

```
CPU family:                          6
Model:                               173
Thread(s) per core:                  2
Core(s) per socket:                  86
Socket(s):                           2
Stepping:                            1
Frequency boost:                     enabled
CPU(s) scaling MHz:                  102%
CPU max MHz:                         2001.0000
CPU min MHz:                         800.0000
BogoMIPS:                            4000.00
Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                     pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                     nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                     pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                     pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                     cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                     ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                     cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                     intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                     xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                     split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                     arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                     vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                     bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                     serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                     amx_int8 flush_l1d arch_capabilities
L1d cache:                           8.1 MiB (172 instances)
L1i cache:                           10.8 MiB (172 instances)
L2 cache:                            344 MiB (172 instances)
L3 cache:                            672 MiB (2 instances)
NUMA node(s):                        4
NUMA node0 CPU(s):                   0-42,172-214
NUMA node1 CPU(s):                   43-85,215-257
NUMA node2 CPU(s):                   86-128,258-300
NUMA node3 CPU(s):                   129-171,301-343
Vulnerability Gather data sampling:  Not affected
Vulnerability Itlb multihit:         Not affected
Vulnerability L1tf:                  Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                                    PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                 Not affected
   Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     8.1M   12 Data            1     64        1             64
     L1i       64K    10.8M   16 Instruction     1     64        1             64
     L2         2M     344M   16 Unified         2   2048        1             64
     L3       336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42,172-214
  node 0 size: 257398 MB
  node 0 free: 247334 MB
  node 1 cpus: 43-85,215-257
  node 1 size: 258025 MB
  node 1 free: 248371 MB
  node 2 cpus: 86-128,258-300
  node 2 size: 257986 MB
  node 2 free: 248148 MB
  node 3 cpus: 129-171,301-343
  node 3 size: 257562 MB
  node 3 free: 247871 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055715876 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 6 13:57

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled         apparmor auditd cron getty@ irqbalance issue-generator kbdsettings kdump kdump-early
                  kdump-notify nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled          boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                  exchange-bmc-os-info fsidd grub2-once haveged ipmievd issue-add-ssh-keys kexec-load
                lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
                  systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                    systemd-timesyncd tuned
  indirect          systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=abf2f043-1a11-4e74-925a-2d92d4c037b3
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=382M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 222:
    current policy: frequency should be within 800 MHz and 2.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 xfs   931G   77G  855G   9% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
     Vendor:          IEIT SYSTEMS
     Product:         NF5280-M8-A0-R0-00
     Product Family: Not specified
     Serial:          000000000

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      4x Hynix HMCG94BDJHA380N 64 GB 1 rank 12800, configured at 8000
      4x Hynix HMCG94BDJHA383N 64 GB 1 rank 12800, configured at 8000
      5x Hynix HMCG94BDJHA462N 64 GB 1 rank 12800, configured at 8000
      3x Hynix HMCG94BDJHA464N 64 GB 1 rank 12800, configured at 8000


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      04.01.00
    BIOS Date:         12/17/2025
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,
       | peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
       | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,
       | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,
       | peak) 750.sealcrypto_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Peak Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2)
-xHost(pass 1) -ffp-model=fast -xsapphirerapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3 -mfpmath=sse
-funroll-loops -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:

706.stockfish_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xsapphirerapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: Same as 706.stockfish_r

Benchmarks using both C and C++:

710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xsapphirerapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3

(Continued on next page)

Peak Optimization Flags (Continued)

710.omnetpp_r (continued):
-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

721.gcc_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xsapphirerapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

723.llvm_r: Same as 721.gcc_r

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: Same as 710.omnetpp_r

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/IEIT-Platform-Settings-intel-V2.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/IEIT-Platform-Settings-intel-V2.0.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-21 00:00:44-0400.
Report generated on 2026-06-16 17:19:21 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-06-16.