SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M8 (Intel Xeon 6788P 2.0 GHz processor)

SPECspeed®2026_int_base = 6.82

SPECspeed®2026_int_peak = 6.89

CPU2026 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

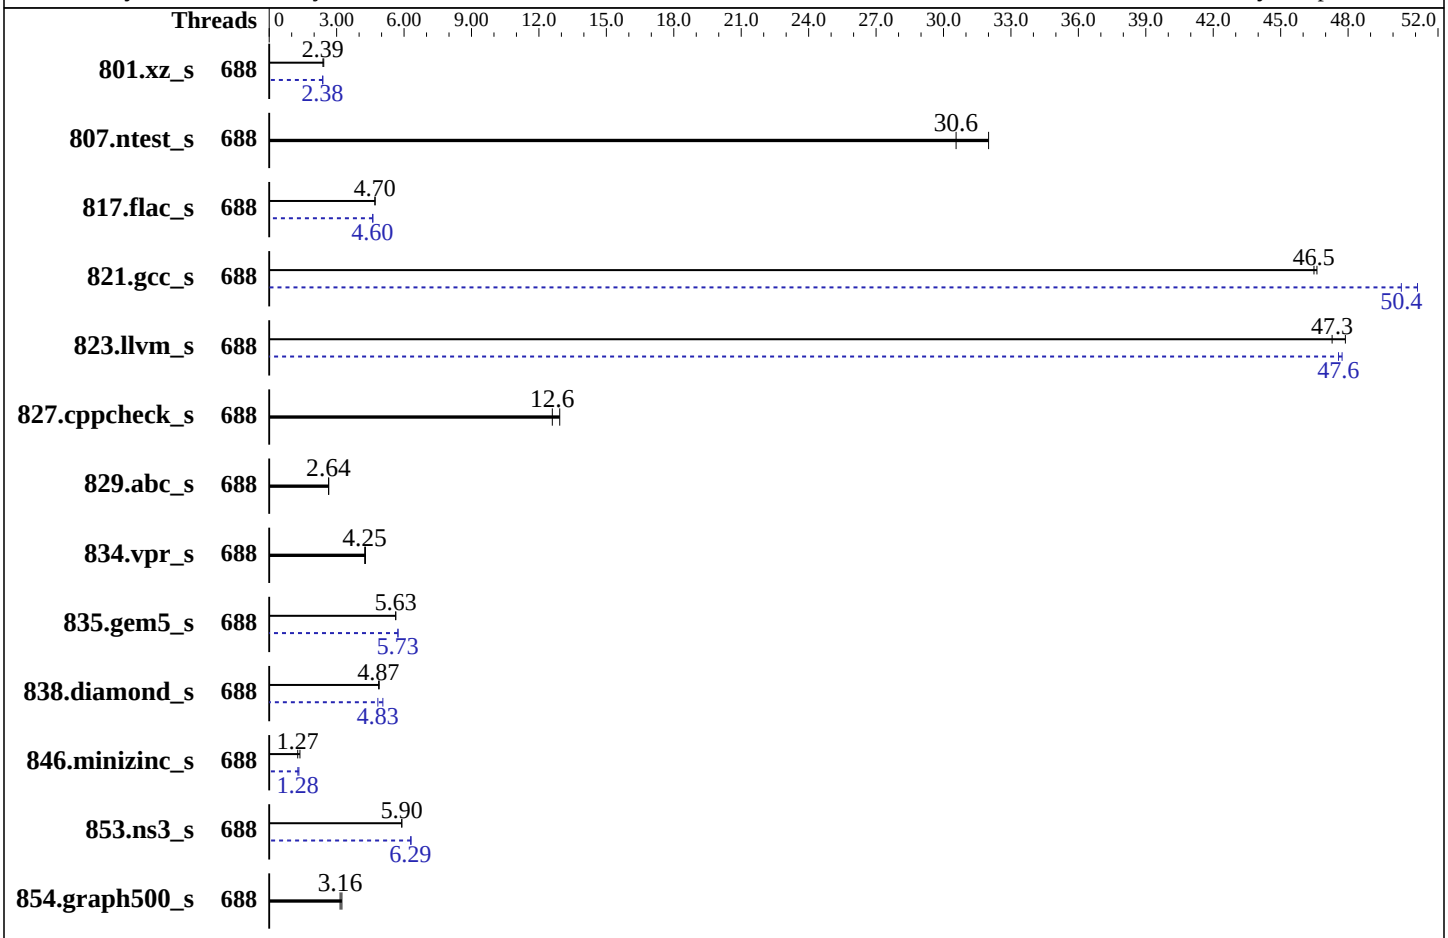

Hardware

CPU Name:	Intel Xeon 6788P
Max MHz:	3800
Nominal:	2000
Enabled:	344 cores, 4 chips, 2 threads/core
Orderable:	2,4 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 400 GB NVME SSD
Cooling:	Air
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Version 6.0.2b released Jan-2026
File System:	btrfs
System State:	Run Level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M8 (Intel Xeon 6788P 2.0 GHz processor)

SPECspeed®2026_int_base = 6.82

SPECspeed®2026_int_peak = 6.89

CPU2026 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	688	243	2.43	**247**	**2.39**			688	**249**	**2.38**	248	2.39		
807.ntest_s	688	35.6	32.0	**37.3**	**30.6**			688	35.6	32.0	**37.3**	**30.6**		
817.flac_s	688	368	4.72	**370**	**4.70**			688	376	4.61	**378**	**4.60**		
821.gcc_s	688	44.4	46.6	**44.5**	**46.5**			688	**41.1**	**50.4**	40.5	51.1		
823.llvm_s	688	29.5	47.9	**29.8**	**47.3**			688	29.6	47.7	**29.7**	**47.6**		
827.cppcheck_s	688	**88.8**	**12.6**	86.6	12.9			688	**88.8**	**12.6**	86.6	12.9		
829.abc_s	688	314	2.65	**315**	**2.64**			688	314	2.65	**315**	**2.64**		
834.vpr_s	688	223	4.28	**225**	**4.25**			688	223	4.28	**225**	**4.25**		
835.gem5_s	688	**202**	**5.63**	202	5.63			688	199	5.73	**199**	**5.73**		
838.diamond_s	688	204	4.90	**206**	**4.87**			688	**207**	**4.83**	198	5.06		
846.minizinc_s	688	490	1.37	**528**	**1.27**			688	**525**	**1.28**	507	1.32		
853.ns3_s	688	195	5.90	**196**	**5.90**			688	183	6.31	**183**	**6.29**		
854.graph500_s	688	189	3.23	**194**	**3.16**			688	189	3.23	**194**	**3.16**		

SPECspeed®2026_int_base = 6.82

SPECspeed®2026_int_peak = 6.89

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Adjacent cache line prefetcher set to Enabled
DCU Streamer Prefetch set to Enabled
UPI Power Management set to Disabled
Patrol scrub set to Disabled
XPT prefetch set to Auto
Enhanced CPU performance set to Auto
CPU Performance set to Custom

 Sysinfo program /home/cpu2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Wed May 20 09:01:58 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64

------------------------------------------------------------
2. w
   09:01:59 up  2:31,  3 users,  load average: 0.35, 0.42, 0.19
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    10.29.148.201    07:09   15.00s  2.26s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8252476
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8252476
```

(Continued on next page)

Platform Notes (Continued)

```
   virtual memory          (kbytes, -v) unlimited
   file locks                     (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --reportable --action validate --define default-platform-flags -c
   ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 688 --define cores=344 --tune base,peak
    -o all --define intspeedaffinity --define smt-on --define drop_caches intspeed
 runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
   ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 688 --define cores=344 --tune base,peak
   --output_format all --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode
    speed --tune base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.009/templogs/preenv.intspeed.009.0.log --lognum 009.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6788P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 86
    siblings        : 172
    4 physical ids (chips)
    688 processors (hardware threads)
    physical id 0: core ids 0-42,64-106
    physical id 1: core ids 0-42,64-106
    physical id 2: core ids 0-42,64-106
    physical id 3: core ids 0-42,64-106
    physical id 0: apicids 0-85,128-213
    physical id 1: apicids 256-341,384-469
    physical id 2: apicids 512-597,640-725
    physical id 3: apicids 768-853,896-981
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        46 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               688
   On-line CPU(s) list:                  0-687
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel(R) Corporation
   Model name:                           Intel(R) Xeon(R) 6788P
   BIOS Model name:                      Intel(R) Xeon(R) 6788P  CPU @ 2.0GHz
   BIOS CPU family:                      179
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   86
   Socket(s):                            4
   Stepping:                             1
   CPU(s) scaling MHz:                   22%
   CPU max MHz:                          3800.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             4000.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
                                         pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
                                         aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                         cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                         ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                                         invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                         clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                                         wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                                         hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                         vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                         bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                         serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                         amx_int8 flush_l1d arch_capabilities
   L1d cache:                            16.1 MiB (344 instances)
   L1i cache:                            21.5 MiB (344 instances)
   L2 cache:                             688 MiB (344 instances)
   L3 cache:                             1.3 GiB (4 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node(s):                         8
   NUMA node0 CPU(s):                    0-42,344-386
   NUMA node1 CPU(s):                    43-85,387-429
   NUMA node2 CPU(s):                    86-128,430-472
   NUMA node3 CPU(s):                    129-171,473-515
   NUMA node4 CPU(s):                    172-214,516-558
   NUMA node5 CPU(s):                    215-257,559-601
   NUMA node6 CPU(s):                    258-300,602-644
   NUMA node7 CPU(s):                    301-343,645-687
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K    16.1M   12 Data            1     64        1             64
      L1i       64K    21.5M   16 Instruction     1     64        1             64
      L2         2M     688M   16 Unified         2   2048        1             64
      L3       336M     1.3G   16 Unified         3 344064        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0-42,344-386
   node 0 size: 257164 MB
   node 0 free: 256322 MB
   node 1 cpus: 43-85,387-429
   node 1 size: 257986 MB
   node 1 free: 257319 MB
   node 2 cpus: 86-128,430-472
   node 2 size: 258025 MB
   node 2 free: 255353 MB
   node 3 cpus: 129-171,473-515
   node 3 size: 258025 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 free: 257183 MB
  node 4 cpus: 172-214,516-558
  node 4 size: 258025 MB
  node 4 free: 257303 MB
  node 5 cpus: 215-257,559-601
  node 5 size: 258025 MB
  node 5 free: 257376 MB
  node 6 cpus: 258-300,602-644
  node 6 size: 258025 MB
  node 6 free: 257326 MB
  node 7 cpus: 301-343,645-687
  node 7 size: 257865 MB
  node 7 free: 254965 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  21  21  21  21  21  21
    1:  12  10  21  21  21  21  21  21
    2:  21  21  10  12  21  21  21  21
    3:  21  21  12  10  21  21  21  21
    4:  21  21  21  21  10  12  21  21
    5:  21  21  21  21  12  10  21  21
    6:  21  21  21  21  21  21  10  12
    7:  21  21  21  21  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2112660780 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 20 06:32

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                    issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
```

(Continued on next page)

Platform Notes (Continued)

```
                 nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                     wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                  firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                     udisks2 vncserver@
  indirect           systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=c9a29bb1-f95d-4e5a-816b-db69c8356128
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 274:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: latency-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2026
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  371G   65G  301G  18% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-410C-M8
    Serial:         FVH2920P0DV

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)

Platform Notes (Continued)

```
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      1x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
      18x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
      13x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Cisco Systems, Inc.
    BIOS Version:      X410M8.6.0.2b.0.0130261958
    BIOS Date:         01/30/2026
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base, peak) 827.cppcheck_s(base, peak) 853.ns3_s(base,
       | peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base, peak) 817.flac_s(base, peak) 821.gcc_s(base, peak)
       | 823.llvm_s(base, peak) 829.abc_s(base, peak) 834.vpr_s(base, peak)
       | 835.gem5_s(base, peak) 838.diamond_s(base, peak)
       | 846.minizinc_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

834.vpr_s: -fno-fast-math

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Peak Portability Flags

834.vpr_s: -fno-fast-math

Peak Optimization Flags

C benchmarks:

854.graph500_s: basepeak = yes

C++ benchmarks:

807.ntest_s: basepeak = yes

827.cppcheck_s: basepeak = yes

853.ns3_s: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -pthread -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

801.xz_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

817.flac_s: Same as 801.xz_s

821.gcc_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

823.llvm_s: Same as 821.gcc_s

829.abc_s: basepeak = yes

834.vpr_s: basepeak = yes

835.gem5_s: Same as 801.xz_s

838.diamond_s: Same as 801.xz_s

846.minizinc_s: Same as 801.xz_s

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-V2.0-GNR-revP.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-V2.0-GNR-revP.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-20 12:01:58-0400.
Report generated on 2026-06-16 17:19:24 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-06-16.