



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

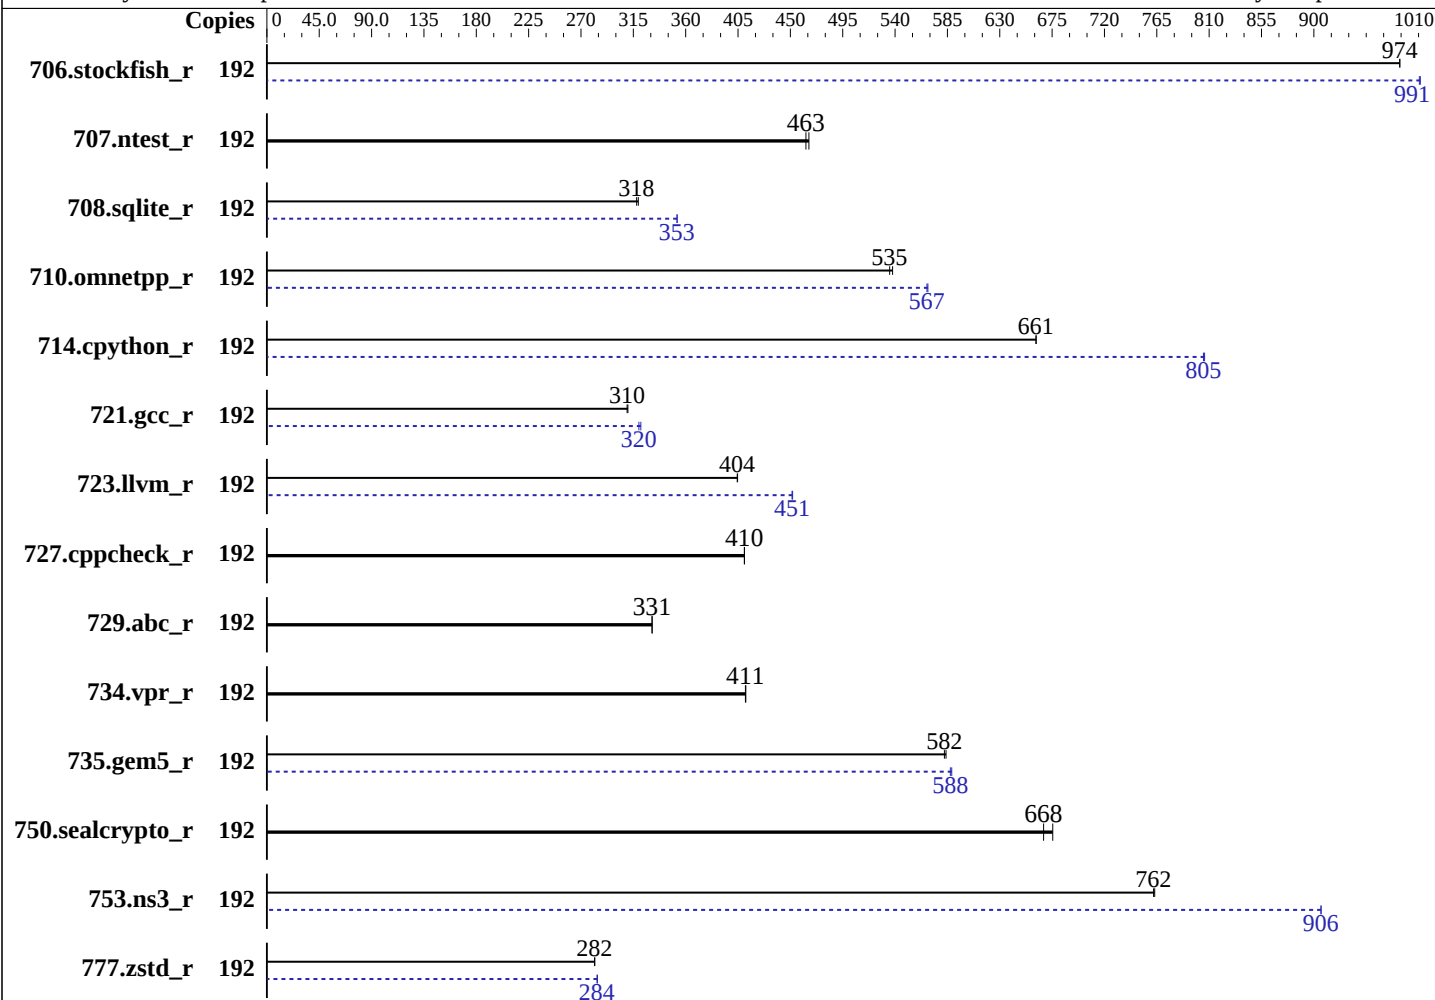

Hardware

CPU Name: Intel Xeon 6970E+
Max MHz: 3200
Nominal: 2300
Enabled: 192 cores, 1 chip
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 192 MB I+D on chip per chip, 4 MB shared / 4 cores
L3: 480 MB I+D on chip per chip
Other: None
Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)
Storage: 1 x 480 GB NVMe SSD
Cooling: Air
Other: None

Software

OS: Red Hat Enterprise Linux 9.7
Kernel 5.14.0-611.5.1.el9_7.x86_64
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Version 1.5b released May-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	192	248	974	248	974			192	244	992	244	991		
707.ntest_r	192	245	463	244	466			192	245	463	244	466		
708.sqlite_r	192	319	318	318	319			192	287	353	288	353		
710.omnetpp_r	192	174	535	173	538			192	164	568	164	567		
714.cpython_r	192	139	661	139	661			192	114	805	114	806		
721.gcc_r	192	424	310	425	310			192	410	321	412	320		
723.llvm_r	192	241	405	241	404			192	216	451	215	452		
727.cppcheck_r	192	168	410	168	411			192	168	410	168	411		
729.abc_r	192	266	331	266	331			192	266	331	266	331		
734.vpr_r	192	215	412	215	411			192	215	412	215	411		
735.gem5_r	192	161	582	160	584			192	159	589	159	588		
750.sealcrypto_r	192	154	668	152	676			192	154	668	152	676		
753.ns3_r	192	154	763	154	762			192	130	906	130	906		
777.zstd_r	192	439	282	439	282			192	435	284	436	284		

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

General Notes (Continued)

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
Workload Profile = HPC
KTI Prefetch = Enable
Stale AtoS = Disable
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on Thu May 28 15:48:52 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srv
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.el9)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -srvmm
Linux 5.14.0-611.5.1.el9_7.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Oct 17 14:16:35 EDT 2025 x86_64
```

```
2. w
15:48:52 up 2 min, 1 user, load average: 0.08, 0.11, 0.05
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1     15:46   8.00s  1.40s  0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 4640390
max locked memory           (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4640390
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```
-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 192 -c
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=192 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
intrate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 192 --configfile
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=192 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6970E+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 221
stepping        : 1
microcode       : 0x1000120
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores       : 192
siblings        : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-63,128-191,256-319
physical id 0:  apicids
```

```
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,256,258,2
60,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,31
2,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364
,366,368,370,372,374,376,378,380,382,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,
546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,5
98,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 48 bits virtual

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	192
On-line CPU(s) list:	0-191
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6970E+
BIOS Model name:	Intel(R) Xeon(R) 6970E+
CPU family:	6
Model:	221
Thread(s) per core:	1
Core(s) per socket:	192
Socket(s):	1
Stepping:	1
BogoMIPS:	4600.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
arch_lbr ibt flush_l1d arch_capabilities

Virtualization:	VT-x
L1d cache:	6 MiB (192 instances)
L1i cache:	12 MiB (192 instances)
L2 cache:	192 MiB (48 instances)
L3 cache:	480 MiB (1 instance)
NUMA node(s):	3
NUMA node0 CPU(s):	0-63
NUMA node1 CPU(s):	64-127
NUMA node2 CPU(s):	128-191
Vulnerability Gather data sampling:	Not affected
Vulnerability Indirect target selection:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	64K	12M	8	Instruction	1	128	1	64
L2	4M	192M	16	Unified	2	4096	1	64
L3	480M	480M	16	Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 3 nodes (0-2)

node 0 cpus: 0-63

node 0 size: 386111 MB

node 0 free: 384664 MB

node 1 cpus: 64-127

node 1 size: 387055 MB

node 1 free: 385787 MB

node 2 cpus: 128-191

node 2 size: 386994 MB

node 2 free: 385599 MB

node distances:

node	0	1	2
0:	10	15	17
1:	15	10	15
2:	17	15	10

9. /proc/meminfo

MemTotal: 1188005544 kB

10. who -r

run-level 3 May 28 15:46

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

11. Systemd service manager version: systemd 252 (252-55.el9)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprump iprinit iprupdate iscsi-init iscsid iscsiui kpatch kvm_stat ledmon lvm-devices-import man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables nvme-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-sysextd tuned-ppd wpa_supplicant
indirect	iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.el9_7.x86_64
root=/dev/mapper/rhel_135--180--133-root
ro
resume=/dev/mapper/rhel_135--180--133-swap
rd.lvm.lv=rhel_135-180-133/root
rd.lvm.lv=rhel_135-180-133/swap
rhgb
quiet
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

14. cpupower frequency-info

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

os-release Red Hat Enterprise Linux 9.7 (Plow)
redhat-release Red Hat Enterprise Linux release 9.7 (Plow)
system-release Red Hat Enterprise Linux release 9.7 (Plow)

20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel_135--180--133-home	xfs	372G	37G	336G	10%	/home

21. /sys/devices/virtual/dmi/id

Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC64AMBRB970N 96 GB 2 rank 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.5b
BIOS Date: 05/04/2026
BIOS Revision: 5.35

Compiler Version Notes

C | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP, Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Compiler Version Notes (Continued)

```
=====
C++      | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
          | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
=====
C++, C   | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,
          | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,
          | peak) 750.sealcrypto_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -wl, -z, muldefs  
-wl, -plugin-opt=-inline-threshold=1500 -xclearwaterforest -03  
-ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-aliasing  
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Peak Optimization Flags

C benchmarks:

```
-m64 -std=c18 -wl, -z, muldefs -wl, -plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2)  
-xCORE-AVX2(pass 1) -ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -03 -mfpmath=sse -funroll-loops  
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

C++ benchmarks:

```
706.stockfish_r: -m64 -std=c++17 -wl, -z, muldefs  
-wl, -plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -03 -mfpmath=sse -funroll-loops  
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6970E+)

SPECrate®2026_int_base = 475

SPECrate®2026_int_peak = 499

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Peak Optimization Flags (Continued)

753.ns3_r: Same as 706.stockfish_r

Benchmarks using both C and C++:

710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl, -z,muldefs
-Wl, -plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmallo

721.gcc_r: -m64 -std=c++17 -std=c18 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmallo

723.llvm_r: Same as 721.gcc_r

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: Same as 710.omnetpp_r

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-28 03:48:51-0400.
Report generated on 2026-06-16 17:20:05 by CPU2026 PDF formatter (unknown).
Originally published on 2026-06-16.