



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

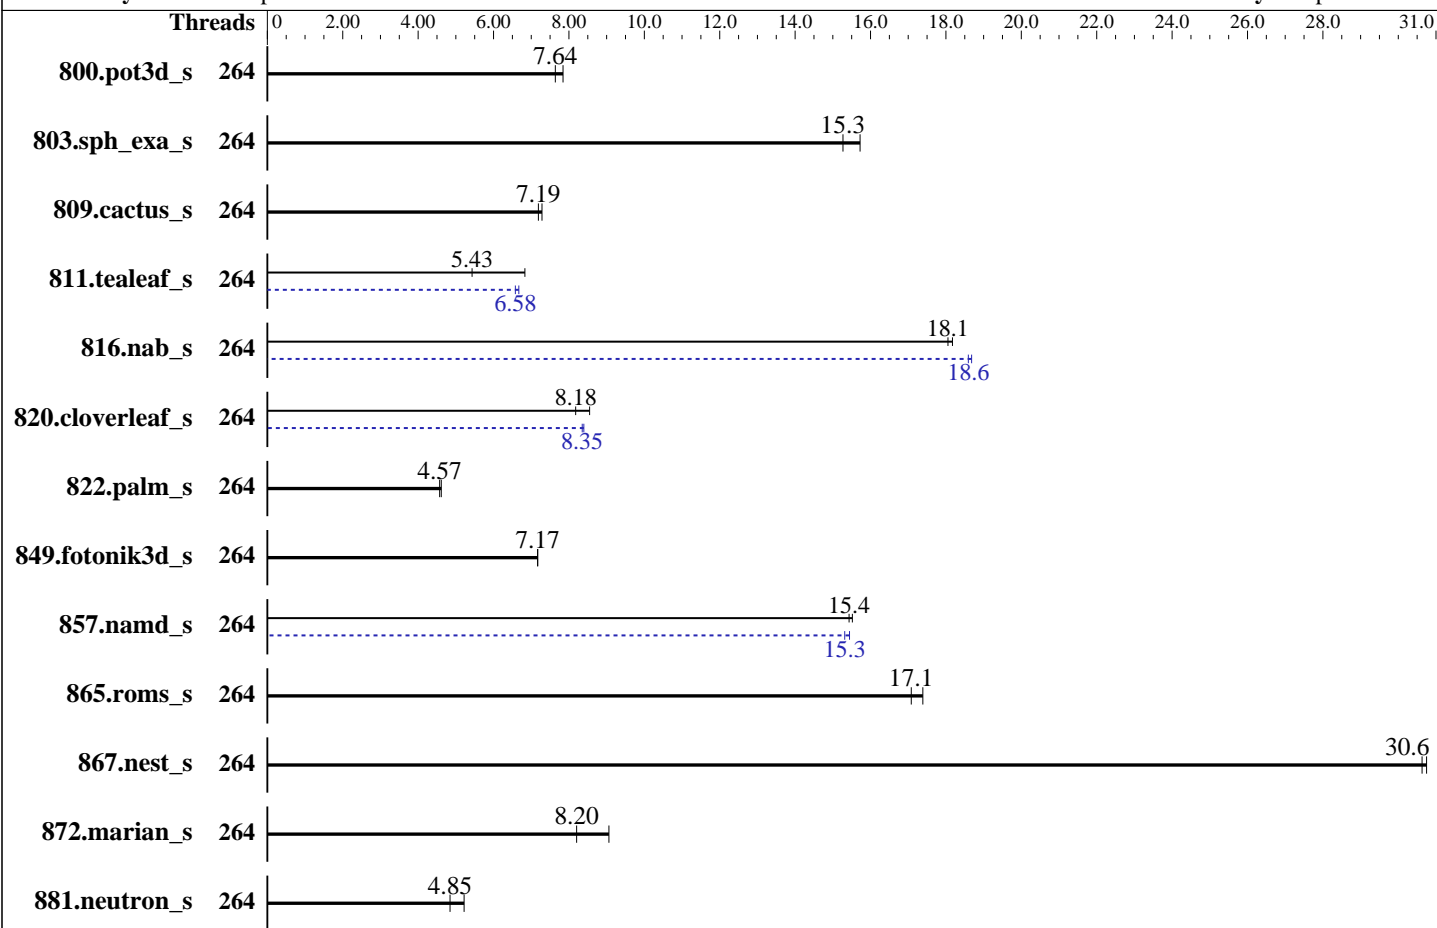

### Hardware

CPU Name: Intel Xeon 6980E+  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 264 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 264 MB I+D on chip per chip, 4 MB shared / 4 cores  
 L3: 528 MB I+D on chip per chip  
 Other: None  
 Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.7  
 Kernel 5.14.0-611.5.1.el9\_7.x86\_64  
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.5b released May-2026  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.3.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECSpeed®2026\_fp\_base = 9.74

SPECSpeed®2026\_fp\_peak = 9.91

CPU2026 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: May-2026  
Hardware Availability: Jun-2026  
Software Availability: Apr-2026

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	264	85.8	7.84	<b>88.1</b>	<b>7.64</b>			264	85.8	7.84	<b>88.1</b>	<b>7.64</b>		
803.sph_exa_s	264	<b>81.1</b>	<b>15.3</b>	78.7	15.7			264	<b>81.1</b>	<b>15.3</b>	78.7	15.7		
809.cactus_s	264	154	7.28	<b>156</b>	<b>7.19</b>			264	154	7.28	<b>156</b>	<b>7.19</b>		
811.tealeaf_s	264	81.5	6.83	<b>103</b>	<b>5.43</b>			264	<b>84.7</b>	<b>6.58</b>	83.5	6.67		
816.nab_s	264	62.0	18.2	<b>62.4</b>	<b>18.1</b>			264	<b>60.6</b>	<b>18.6</b>	60.3	18.7		
820.cloverleaf_s	264	100	8.55	<b>105</b>	<b>8.18</b>			264	102	8.40	<b>103</b>	<b>8.35</b>		
822.palm_s	264	<b>269</b>	<b>4.57</b>	266	4.61			264	<b>269</b>	<b>4.57</b>	266	4.61		
849.fotonik3d_s	264	92.0	7.17	<b>92.0</b>	<b>7.17</b>			264	92.0	7.17	<b>92.0</b>	<b>7.17</b>		
857.namd_s	264	93.6	15.5	<b>94.1</b>	<b>15.4</b>			264	94.0	15.4	<b>94.8</b>	<b>15.3</b>		
865.roms_s	264	<b>63.8</b>	<b>17.1</b>	62.7	17.4			264	<b>63.8</b>	<b>17.1</b>	62.7	17.4		
867.nest_s	264	70.2	30.7	<b>70.5</b>	<b>30.6</b>			264	70.2	30.7	<b>70.5</b>	<b>30.6</b>		
872.marian_s	264	119	9.06	<b>132</b>	<b>8.20</b>			264	119	9.06	<b>132</b>	<b>8.20</b>		
881.neutron_s	264	156	5.22	<b>168</b>	<b>4.85</b>			264	156	5.22	<b>168</b>	<b>4.85</b>		

SPECSpeed®2026\_fp\_base = 9.74

SPECSpeed®2026\_fp\_peak = 9.91

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2026/lib"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS settings:  
Workload Profile = HPC  
KTI Prefetch = Enable  
Stale AtoS = Disable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2026/bin/sysinfo  
Rev: 779ab21020787073335a329f3a45e2cd  
running on Sat May 23 09:25:44 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

1. `uname -srvm`  
Linux 5.14.0-611.5.1.el9\_7.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Oct 17 14:16:35 EDT 2025 x86\_64

2. `w`  
09:25:44 up 16:27, 1 user, load average: 74.46, 70.00, 47.76  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 Fri16 16:16m 1.32s 0.00s -bash

3. Username  
From environment variable \$USER: root

4. `ulimit -a`  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4640021  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4640021  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
runcpu --nobuild --reportable --action validate --define default-platform-flags -c  
ic2026.0-clearwaterforest-cpu2026-1.0.1-speed-20260429.cfg --threads 264 --define cores=264 --tune  
base,peak -o all --define smt-on --define drop\_caches fpspeed  
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile  
ic2026.0-clearwaterforest-cpu2026-1.0.1-speed-20260429.cfg --threads 264 --define cores=264 --tune

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```
base,peak --output_format all --define smt-on --define drop_caches --nopower --runmode speed --tune
base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6980E+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores      : 264
siblings       : 264
1 physical ids (chips)
264 processors (hardware threads)
physical id 0: core ids 0-87,128-215,256-343
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,256,258,260,262,26
4,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316
,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368
,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,4
22,424,426,428,430,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,55
4,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606
,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658
,660,662,664,666,668,670,672,674,676,678,680,682,684,686
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                264
On-line CPU(s) list:   0-263
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6980E+
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) 6980E+
CPU family: 6
Model: 221
Thread(s) per core: 1
Core(s) per socket: 264
Socket(s): 1
Stepping: 1
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vmmi umip
pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
arch_lbr ibt flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 8.3 MiB (264 instances)
L1i cache: 16.5 MiB (264 instances)
L2 cache: 264 MiB (66 instances)
L3 cache: 528 MiB (1 instance)
NUMA node(s): 3
NUMA node0 CPU(s): 0-87
NUMA node1 CPU(s): 88-175
NUMA node2 CPU(s): 176-263
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer
sanitization

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8.3M	8	Data	1	64	1	64
L1i	64K	16.5M	8	Instruction	1	128	1	64
L2	4M	264M	16	Unified	2	4096	1	64
L3	528M	528M	16	Unified	3	540672	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-87
node 0 size: 386041 MB
node 0 free: 312907 MB
node 1 cpus: 88-175
node 1 size: 387049 MB
node 1 free: 381687 MB
node 2 cpus: 176-263
node 2 size: 386978 MB
node 2 free: 381482 MB
node distances:
node    0    1    2
  0:   10   15   17
  1:   15   10   15
  2:   17   15   10

```

9. /proc/meminfo

MemTotal: 1187911120 kB

10. who -r

run-level 3 May 22 16:58

11. Systemd service manager version: systemd 252 (252-55.e19)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
                low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon
                selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update
                systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit
                iprupdate iscsi-init iscsid iscsiuiop kpatch kvm_stat ledmon lvm-devices-import
                man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables
                nvmmf-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman
                podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl
                rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable
                serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                systemd-sysext tuned-ppd wpa_supplicant
indirect       iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                systemd-sysupdate systemd-sysupdate-reboot

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.el9_7.x86_64
root=/dev/mapper/rhel_135--180--133-root
ro
resume=/dev/mapper/rhel_135--180--133-swap
rd.lvm.lv=rhel_135-180-133/root
rd.lvm.lv=rhel_135-180-133/swap
rhgb
quiet
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

```

```

-----
14. cpupower frequency-info
analyzing CPU 178:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

#### 16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

#### 17. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

#### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

#### 19. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 9.7 (Plow)
redhat-release	Red Hat Enterprise Linux release 9.7 (Plow)
system-release	Red Hat Enterprise Linux release 9.7 (Plow)

#### 20. Disk information

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel_135--180--133-home	xfs	372G	105G	268G	29%	/home

```

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

```

#### 22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x SK Hynix HMC4G4AMBRB970N 96 GB 2 rank 8000

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.5b
BIOS Date: 05/04/2026
BIOS Revision: 5.35

```

### Compiler Version Notes

```

C      | 811.tealeaf_s(base, peak) 816.nab_s(base, peak) 881.neutron_s(base,
      | peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```

```

C++   | 803.sph_exa_s(base, peak) 857.namd_s(base, peak) 867.nest_s(base,
      | peak) 872.marian_s(base, peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Compiler Version Notes (Continued)

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====  
C++, C | 809.cactus\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====  
Fortran | 800.pot3d\_s(base, peak) 820.cloverleaf\_s(base, peak)  
| 822.palm\_s(base, peak) 849.fotonik3d\_s(base, peak) 865.roms\_s(base,  
| peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2026.0.0 Build 20260331

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

### Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -pthread -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -pthread
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

## Peak Optimization Flags

C benchmarks:

```
811.tealeaf_s: -m64 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Optimization Flags (Continued)

811.tealeaf\_s (continued):

```
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

816.nab\_s: Same as 811.tealeaf\_s

881.neutron\_s: basepeak = yes

C++ benchmarks:

803.sph\_exa\_s: basepeak = yes

```
857.namd_s: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-pthread -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

```
820.cloverleaf_s: -m64 -stand f18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-nostandard-realloc-lhs -align array32byte -auto
-DSPEC_OPENMP -fiopenmp -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

822.palm\_s: basepeak = yes

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECspeed®2026\_fp\_base = 9.74

SPECspeed®2026\_fp\_peak = 9.91

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

809.cactus\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-22 21:25:43-0400.  
Report generated on 2026-06-16 17:19:33 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-06-16.