# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6980E+)

**SPECrate®2026_fp_base = 519**

**SPECrate®2026_fp_peak = 530**

**CPU2026 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** May-2026
**Hardware Availability:** Jun-2026
**Software Availability:** Apr-2026

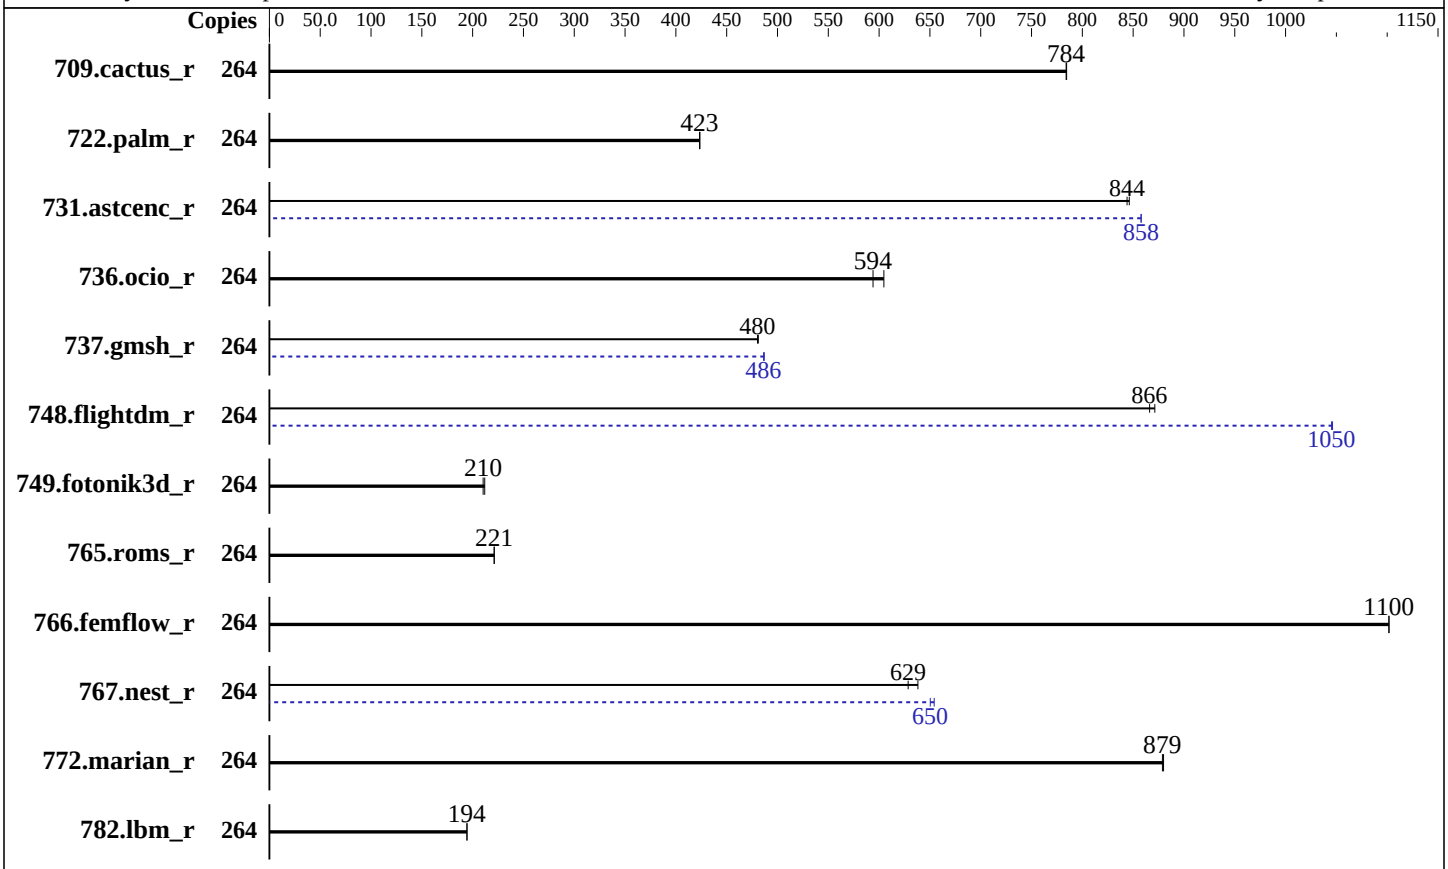


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6980E+ |
| Max MHz: | 3200 |
| Nominal: | 2100 |
| Enabled: | 264 cores, 1 chip |
| Orderable: | 1 chip |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 264 MB I+D on chip per chip, 4 MB shared / 4 cores |
| L3: | 528 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R) |
| Storage: | 1 x 480 GB NVMe SSD |
| Cooling: | Air |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.7<br>Kernel 5.14.0-611.5.1.el9_7.x86_64 |
| Compiler: | C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2026.0 of Intel Fortran Compiler for Linux |
| Compiler Category: | Vendor |
| Firmware: | Version 1.5b released May-2026 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.3.0 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026_fp_base = 519

SPECrate®2026_fp_peak = 530

**CPU2026 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** May-2026
**Hardware Availability:** Jun-2026
**Software Availability:** Apr-2026

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 709.cactus_r | 264 | 289 | 785 | **289** | **784** | | | 264 | 289 | 785 | **289** | **784** | | |
| 722.palm_r | 264 | **823** | **423** | 822 | 424 | | | 264 | **823** | **423** | 822 | 424 | | |
| 731.astcenc_r | 264 | **263** | **844** | 262 | 846 | | | 264 | **259** | **858** | 259 | 858 | | |
| 736.ocio_r | 264 | **389** | **594** | 382 | 605 | | | 264 | **389** | **594** | 382 | 605 | | |
| 737.gmsh_r | 264 | **252** | **480** | 252 | 481 | | | 264 | **249** | **486** | 249 | 487 | | |
| 748.flightdm_r | 264 | **218** | **866** | 217 | 871 | | | 264 | **181** | **1050** | 181 | 1050 | | |
| 749.fotonik3d_r | 264 | **1451** | **210** | 1440 | 212 | | | 264 | **1451** | **210** | 1440 | 212 | | |
| 765.roms_r | 264 | **1880** | **221** | 1879 | 221 | | | 264 | **1880** | **221** | 1879 | 221 | | |
| 766.femflow_r | 264 | **352** | **1100** | 351 | 1100 | | | 264 | **352** | **1100** | 351 | 1100 | | |
| 767.nest_r | 264 | **333** | **629** | 328 | 638 | | | 264 | **322** | **650** | 320 | 654 | | |
| 772.marian_r | 264 | **474** | **879** | 474 | 880 | | | 264 | **474** | **879** | 474 | 880 | | |
| 782.lbm_r | 264 | **778** | **194** | 778 | 194 | | | 264 | **778** | **194** | 778 | 194 | | |

**SPECrate®2026_fp_base = 519**

**SPECrate®2026_fp_peak = 530**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

**(Continued on next page)**

## General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS settings:
Workload Profile = HPC
KTI Prefetch = Enable
Stale AtoS = Disable
LLC Dead Line Alloc = Disable

 Sysinfo program /home/cpu2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on  Fri May 22 21:35:12 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-55.el9)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
```

**(Continued on next page)**

## Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 5.14.0-611.5.1.el9_7.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Oct 17 14:16:35 EDT 2025 x86_64

------------------------------------------------------------
2. w
   21:35:12 up  4:37,  1 user,  load average: 89.58, 209.61, 237.45
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      16:58    4:26m  1.42s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4640021
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4640021
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 login -- root
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 -bash
 -bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 264 -c
  ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=132
  --define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   -o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 264 --configfile
  ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=132
  --define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0
   --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6980E+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 221
    stepping        : 1
    microcode       : 0x1000120
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
    cpu cores       : 264
    siblings        : 264
    1 physical ids (chips)
    264 processors (hardware threads)
    physical id 0: core ids 0-87,128-215,256-343
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
   32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,256,258,260,262,26
   4,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316
   ,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,
   370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,4
   22,424,426,428,430,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,55
   4,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606
   ,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,
    660,662,664,666,668,670,672,674,676,678,680,682,684,686
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               264
  On-line CPU(s) list:                  0-263
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6980E+
  BIOS Model name:                      Intel(R) Xeon(R) 6980E+
  CPU family:                           6
  Model:                                221
  Thread(s) per core:                   1
  Core(s) per socket:                   264
  Socket(s):                            1
  Stepping:                             1
  BogoMIPS:                             4200.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                        bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
                                        intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                        user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
                                        pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                                        arch_lbr ibt flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            8.3 MiB (264 instances)
  L1i cache:                            16.5 MiB (264 instances)
  L2 cache:                             264 MiB (66 instances)
  L3 cache:                             528 MiB (1 instance)
  NUMA node(s):                         3
  NUMA node0 CPU(s):                    0-87
  NUMA node1 CPU(s):                    88-175
  NUMA node2 CPU(s):                    176-263
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   Vulnerability Mds:                       Not affected
   Vulnerability Meltdown:                  Not affected
   Vulnerability Mmio stale data:           Not affected
   Vulnerability Reg file data sampling:    Not affected
   Vulnerability Retbleed:                  Not affected
   Vulnerability Spec rstack overflow:      Not affected
   Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                            sanitization
   Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                            PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                     Not affected
   Vulnerability Tsa:                       Not affected
   Vulnerability Tsx async abort:           Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       32K     8.3M    8 Data            1     64        1             64
      L1i       64K    16.5M    8 Instruction     1    128        1             64
      L2         4M     264M   16 Unified         2   4096        1             64
      L3       528M     528M   16 Unified         3 540672        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 3 nodes (0-2)
   node 0 cpus: 0-87
   node 0 size: 386041 MB
   node 0 free: 363160 MB
   node 1 cpus: 88-175
   node 1 size: 387049 MB
   node 1 free: 364760 MB
   node 2 cpus: 176-263
   node 2 size: 386978 MB
   node 2 free: 364757 MB
   node distances:
   node     0    1    2
      0:   10   15   17
      1:   15   10   15
      2:   17   15   10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       1187911120 kB

 ------------------------------------------------------------
 10. who -r
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   run-level 3 May 22 16:58

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 252 (252-55.el9)
   Default Target  Status
   multi-user      running

 ------------------------------------------------------------
 12. Services, from systemctl list-unit-files
   STATE             UNIT FILES
   enabled           ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                  accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                  gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                  nvmefc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon
                   selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update
                   systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd
   enabled-runtime   systemd-remount-fs
   disabled          arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                  canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                 cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit
                   iprupdate iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon lvm-devices-import
                  man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables
                   nvmf-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman
                 podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl
                   rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable
                   serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                     systemd-sysext tuned-ppd wpa_supplicant
   indirect          iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                     systemd-sysupdate systemd-sysupdate-reboot

 ------------------------------------------------------------
 13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.el9_7.x86_64
   root=/dev/mapper/rhel_135--180--133-root
   ro
   resume=/dev/mapper/rhel_135--180--133-swap
   rd.lvm.lv=rhel_135-180-133/root
   rd.lvm.lv=rhel_135-180-133/swap
   rhgb
   quiet
   crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

 ------------------------------------------------------------
 14. cpupower frequency-info
   analyzing CPU 51:
     Unable to determine current policy
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.7 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.7 (Plow)
  system-release Red Hat Enterprise Linux release 9.7 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026
  Filesystem                          Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel_135--180--133-home xfs   372G   91G  281G  25% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        Super Server
    Product Family: Family
    Serial:         0123456789

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCGM4AMBRB970N 96 GB 2 rank 8000


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.5b
   BIOS Date:         05/04/2026
   BIOS Revision:     5.35
```

## Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++      | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
         | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
         | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C   | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran  | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
         | peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

## Base Portability Flags

737.gmsh_r: `-fno-associative-math`

## Base Optimization Flags

C benchmarks:
`-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

C++ benchmarks:
`-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Fortran benchmarks:
`-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Benchmarks using both C and C++:
`-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

## Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both C and C++:
`icpx icx`

## Peak Portability Flags

737.gmsh_r: `-fno-associative-math`

## Peak Optimization Flags

C benchmarks:

782.lbm_r: `basepeak = yes`

C++ benchmarks:

731.astcenc_r: `-m64 -std=c++17 -Wl,-z,muldefs`
`-Wl,-plugin-opt=-inline-threshold=1500`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1)
`-ffp-model=fast -xclearwaterforest`(pass 2) `-flto`
`-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops`
`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

736.ocio_r: `basepeak = yes`

748.flightdm_r: `Same as 731.astcenc_r`

766.femflow_r: `basepeak = yes`

767.nest_r: `Same as 731.astcenc_r`

772.marian_r: `basepeak = yes`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `basepeak = yes`

Benchmarks using both C and C++:

709.cactus_r: `basepeak = yes`

737.gmsh_r: `-m64 -std=c++17 -std=c18 -Wl,-z,muldefs`
`-Wl,-plugin-opt=-inline-threshold=1500`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1)

**(Continued on next page)**

## Peak Optimization Flags (Continued)

737.gmsh_r (continued):
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2026 v1.0.1 on 2026-05-22 09:35:11-0400.
Report generated on 2026-06-16 17:19:42 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-06-16.