



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

**PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz**

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

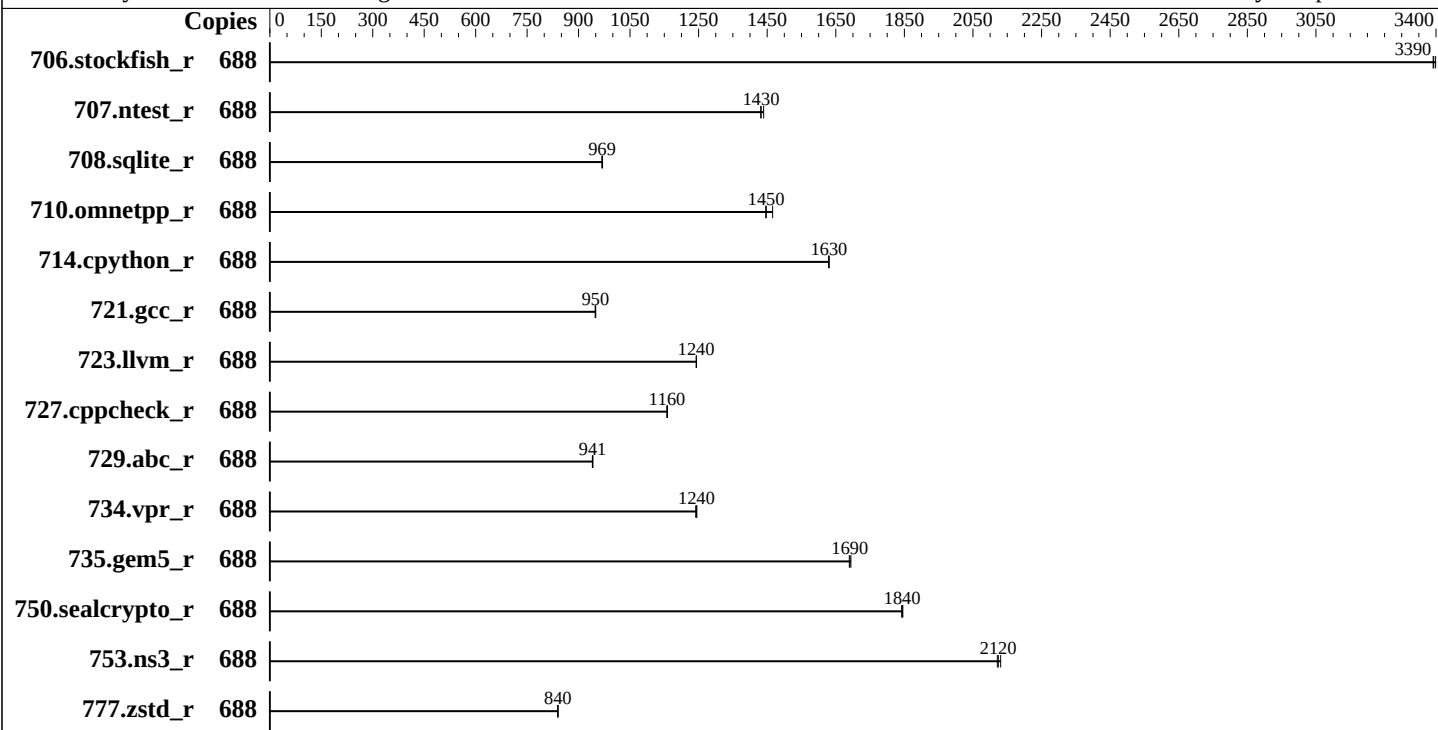

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 344 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x PCIe SSD, 1.92 TB
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran
Compiler for Linux
Compiler Category: Vendor
Firmware: Fsas Technologies Inc. BIOS Version V1.0.0.0
R1.3.0 for D4136-A1x. Released Apr-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost
of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	688	255	3400	<u>255</u>	<u>3390</u>	256	3390							
707.ntest_r	688	285	1430	283	1440	<u>284</u>	<u>1430</u>							
708.sqlite_r	688	<u>375</u>	<u>969</u>	374	970	375	968							
710.omnetpp_r	688	228	1470	<u>231</u>	<u>1450</u>	231	1450							
714.cpython_r	688	202	1630	<u>202</u>	<u>1630</u>	202	1630							
721.gcc_r	688	498	948	<u>497</u>	<u>950</u>	497	950							
723.llvm_r	688	<u>281</u>	<u>1240</u>	281	1240	280	1240							
727.cppcheck_r	688	<u>213</u>	<u>1160</u>	213	1160	213	1160							
729.abc_r	688	335	942	<u>336</u>	<u>941</u>	336	940							
734.vpr_r	688	255	1240	255	1240	<u>255</u>	<u>1240</u>							
735.gem5_r	688	198	1690	<u>198</u>	<u>1690</u>	198	1690							
750.sealcrypto_r	688	200	1840	<u>200</u>	<u>1840</u>	200	1850							
753.ns3_r	688	199	2120	198	2130	<u>199</u>	<u>2120</u>							
777.zstd_r	688	528	839	<u>528</u>	<u>840</u>	527	840							

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS Settings:

Fan Control = Full

SNC (Sub NUMA) = Enabled

CPU Performance Boost = Aggressive

DCU Streamer Prefetcher = Disabled

UPI Link Frequency Select = 16.0GT/s

XPT Prefetch = Disabled

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Fri Jun 12 21:06:50 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srv
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

1. uname -srvnm

Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

2. w

21:06:50 up 2 min, 1 user, load average: 17.85, 10.33, 3.99
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 21:06 10.00s 2.26s 0.41s -bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8253581
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8253581
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --copies 688 -c
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=344 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all -n 3 intrate
runcpu --nobuild --action validate --define default-platform-flags --copies 688 --configfile
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=344 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
--iterations 3 --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6788P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
4 physical ids  (chips)
688 processors  (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 2:  core ids 0-42,64-106
physical id 3:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
physical id 1:  apicids 256-341,384-469
physical id 2:  apicids 512-597,640-725
physical id 3:  apicids 768-853,896-981
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 688
On-line CPU(s) list:   0-687
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) 6788P
CPU family:             6
Model:                  173
Thread(s) per core:     2
Core(s) per socket:     86
Socket(s):              4
Stepping:               1
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

**PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz**

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

CPU(s) scaling MHz: 21%
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities
Virtualization: VT-x
L1d cache: 16.1 MiB (344 instances)
L1i cache: 21.5 MiB (344 instances)
L2 cache: 688 MiB (344 instances)
L3 cache: 1.3 GiB (4 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-42, 344-386
NUMA node1 CPU(s): 43-85, 387-429
NUMA node2 CPU(s): 86-128, 430-472
NUMA node3 CPU(s): 129-171, 473-515
NUMA node4 CPU(s): 172-214, 516-558
NUMA node5 CPU(s): 215-257, 559-601
NUMA node6 CPU(s): 258-300, 602-644
NUMA node7 CPU(s): 301-343, 645-687
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

**PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz**

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-42,344-386
node 0 size: 257438 MB
node 0 free: 256461 MB
node 1 cpus: 43-85,387-429
node 1 size: 258025 MB
node 1 free: 257364 MB
node 2 cpus: 86-128,430-472
node 2 size: 258025 MB
node 2 free: 257081 MB
node 3 cpus: 129-171,473-515
node 3 size: 257986 MB
node 3 free: 257218 MB
node 4 cpus: 172-214,516-558
node 4 size: 258025 MB
node 4 free: 257331 MB
node 5 cpus: 215-257,559-601
node 5 size: 258025 MB
node 5 free: 257205 MB
node 6 cpus: 258-300,602-644
node 6 size: 258025 MB
node 6 free: 257308 MB
node 7 cpus: 301-343,645-687
node 7 size: 257871 MB
node 7 free: 257167 MB
```

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	21	21	21	21	21	21
1:	12	10	21	21	21	21	21	21
2:	21	21	10	12	21	21	21	21

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
3: 21 21 12 10 21 21 21 21
4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10
```

9. /proc/meminfo

MemTotal: 2112944384 kB

10. who -r

run-level 3 Jun 12 21:06

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=2066019a-dbc1-4a27-addf-ad53fb60bbb7
splash=silent
quiet
security=apparmor
mitigations=auto

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

analyzing CPU 587:

current policy: frequency should be within 800 MHz and 3.80 GHz.

The governor "powersave" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

----- 15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

----- 16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

----- 17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Platform Notes (Continued)

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information

SPEC is set to: /home/Benchmark/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xf	852G	72G	781G	9%	/home

20. /sys/devices/virtual/dmi/id

Vendor: Fsas Technologies
Product: PRIMERGY RX4770 M8
Product Family: SERVER
Serial: xxxxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Fsas Technologies
BIOS Version: V1.0.0.0 R1.3.0 for D4136-A1x
BIOS Date: 03/13/2026
BIOS Revision: 1.3
Firmware Revision: 3.13

Compiler Version Notes

C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Compiler Version Notes (Continued)

```
=====
C++      | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
          | 753.ns3_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C   | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
          | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6788P,
2.00GHz

SPECrate®2026_int_base = 1390

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2026

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -wl, -z, muldefs  
-wl, -plugin-opt=-inline-threshold=1500 -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -fltO -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing  
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-12 08:06:49-0400.

Report generated on 2026-08-11 15:30:10 by CPU2026 PDF formatter (unknown).

Originally published on 2026-06-30.