



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

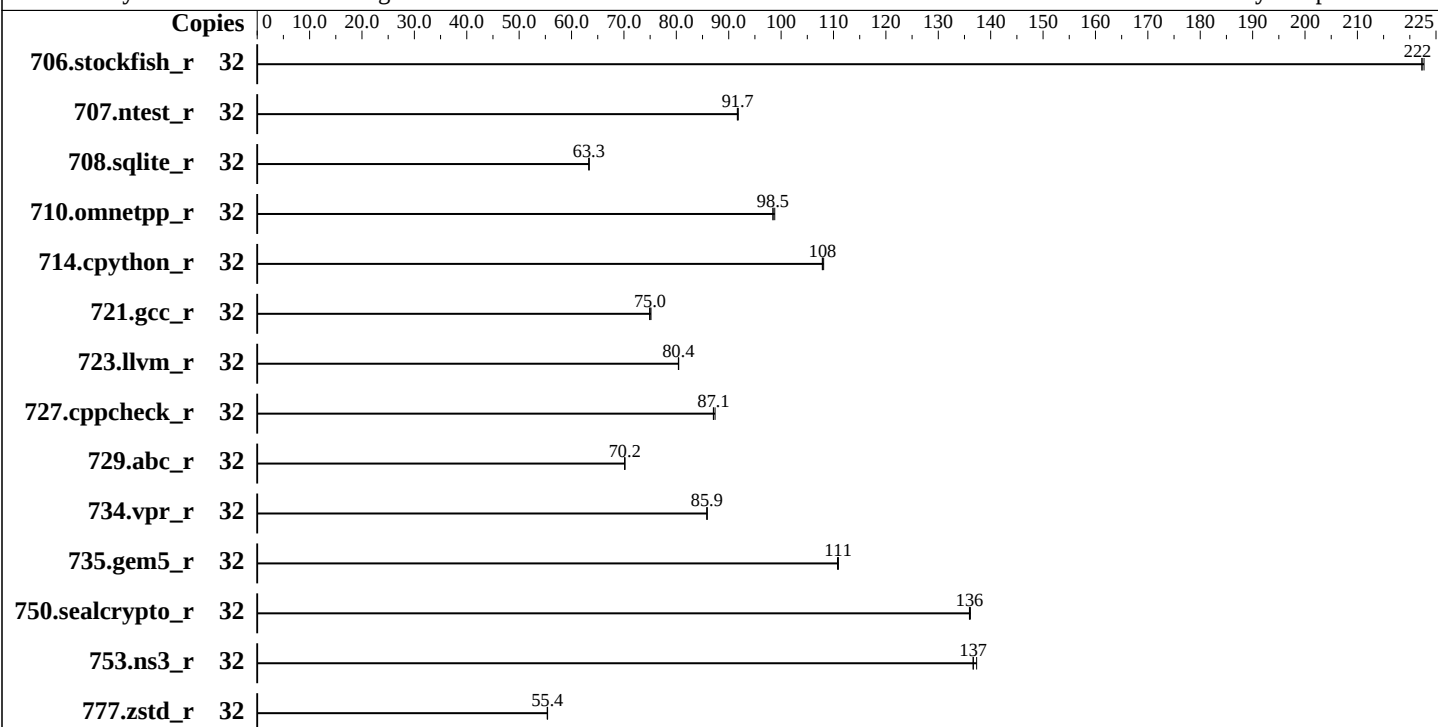

Hardware

CPU Name: Intel Xeon 6507P
Max MHz: 4300
Nominal: 3500
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 48 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x PCIe SSD, 1.92TB
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran
Compiler for Linux
Compiler Category: Vendor
Firmware: Fsas Technologies Inc. BIOS Version V1.0.0.0
R1.5.0 for D4135-A1x. Released Apr-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost
of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	32	181	223	181	222	<u>181</u>	<u>222</u>							
707.ntest_r	32	207	91.6	<u>207</u>	<u>91.7</u>	206	91.8							
708.sqlite_r	32	<u>267</u>	<u>63.3</u>	267	63.4	267	63.3							
710.omnetpp_r	32	158	98.4	157	98.8	<u>158</u>	<u>98.5</u>							
714.cpython_r	32	142	108	<u>142</u>	<u>108</u>	142	108							
721.gcc_r	32	293	74.9	292	75.2	<u>293</u>	<u>75.0</u>							
723.llvm_r	32	<u>202</u>	<u>80.4</u>	202	80.4	202	80.5							
727.cppcheck_r	32	132	87.1	131	87.4	<u>132</u>	<u>87.1</u>							
729.abc_r	32	209	70.2	<u>209</u>	<u>70.2</u>	209	70.1							
734.vpr_r	32	172	85.9	172	85.8	<u>172</u>	<u>85.9</u>							
735.gem5_r	32	140	111	141	111	<u>141</u>	<u>111</u>							
750.sealcrypto_r	32	<u>126</u>	<u>136</u>	126	136	126	136							
753.ns3_r	32	144	137	<u>143</u>	<u>137</u>	143	137							
777.zstd_r	32	<u>372</u>	<u>55.4</u>	372	55.4	372	55.4							

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS Settings:

Fan Control = Full

CPU Performance Boost = Aggressive

UPI Link Frequency Select = 16.0GT/s

APS rocketing = Enabled

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Thu Jun 18 02:16:29 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srv
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

1. uname -srv

Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

2. w

02:16:29 up 2:44, 1 user, load average: 2.87, 19.45, 26.93
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 23:50 2:24m 1.75s 0.31s -bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062466
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062466
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

login -- root

-bash

-bash

runcpu --nobuild --action validate --define default-platform-flags --copies 32 -c

ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all -n 3 intrate

runcpu --nobuild --action validate --define default-platform-flags --copies 32 --configfile ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all

--iterations 3 --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2026.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6507P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0:  core ids 0-7
physical id 1:  core ids 0-7
physical id 0:  apicids 0-15
physical id 1:  apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            32
On-line CPU(s) list: 0-31
Vendor ID:         GenuineIntel
Model name:        Intel(R) Xeon(R) 6507P
CPU family:        6
Model:            173
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s):         2
Stepping:          1
CPU(s) scaling MHz: 26%
CPU max MHz:       4300.0000
CPU min MHz:       800.0000
BogoMIPS:          7000.00
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

**PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz**

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnni avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities

Virtualization:

VT-x

L1d cache:

768 KiB (16 instances)

L1i cache:

1 MiB (16 instances)

L2 cache:

32 MiB (16 instances)

L3 cache:

96 MiB (2 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-7,16-23

NUMA node1 CPU(s):

8-15,24-31

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBR SB-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	64K	1M	16	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

L3	48M	96M	16 Unified	3 49152	1	64
----	-----	-----	------------	---------	---	----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-7,16-23

node 0 size: 257612 MB

node 0 free: 256828 MB

node 1 cpus: 8-15,24-31

node 1 size: 258031 MB

node 1 free: 256790 MB

node distances:

node	0	1
------	---	---

0:	10	21
----	----	----

1:	21	10
----	----	----

9. /proc/meminfo

MemTotal: 528019060 kB

10. who -r

run-level 3 Jun 17 23:32

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target	Status
----------------	--------

multi-user	running
------------	---------

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
---------	--

enabled-runtime	systemd-remount-fs
-----------------	--------------------

disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd vncserver@
----------	---

indirect	systemd-userdbd wickedd
----------	-------------------------

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=6490486a-f020-45c4-b83e-03e98fc56a3b
splash=silent
mitigations=auto
quiet
security=apparmor
tsx=auto
```

14. cpupower frequency-info

analyzing CPU 9:

current policy: frequency should be within 800 MHz and 4.30 GHz.
The governor "powersave" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

19. Disk information

SPEC is set to: /home/Benchmark/cpu2026

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1n1p2 btrfs 1.9T 156G 1.8T 9% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor: Fsas Technologies
Product: PRIMERGY RX2540 M8
Product Family: SERVER
Serial: xxxxxxxxxx
```

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Fsas Technologies
BIOS Version: V1.0.0.0 R1.5.0 for D4135-A1x
BIOS Date: 03/06/2026
BIOS Revision: 1.5
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Firmware Revision: 3.12

Compiler Version Notes

```
=====
C      | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

```
=====
C++    | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
      | 753.ns3_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
      | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6507P,
3.50GHz

SPECrate®2026_int_base = 95.1

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: May-2026

Hardware Availability: Oct-2025

Software Availability: Apr-2026

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing  
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-17 13:16:29-0400.

Report generated on 2026-08-11 15:34:03 by CPU2026 PDF formatter (unknown).

Originally published on 2026-07-14.