



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

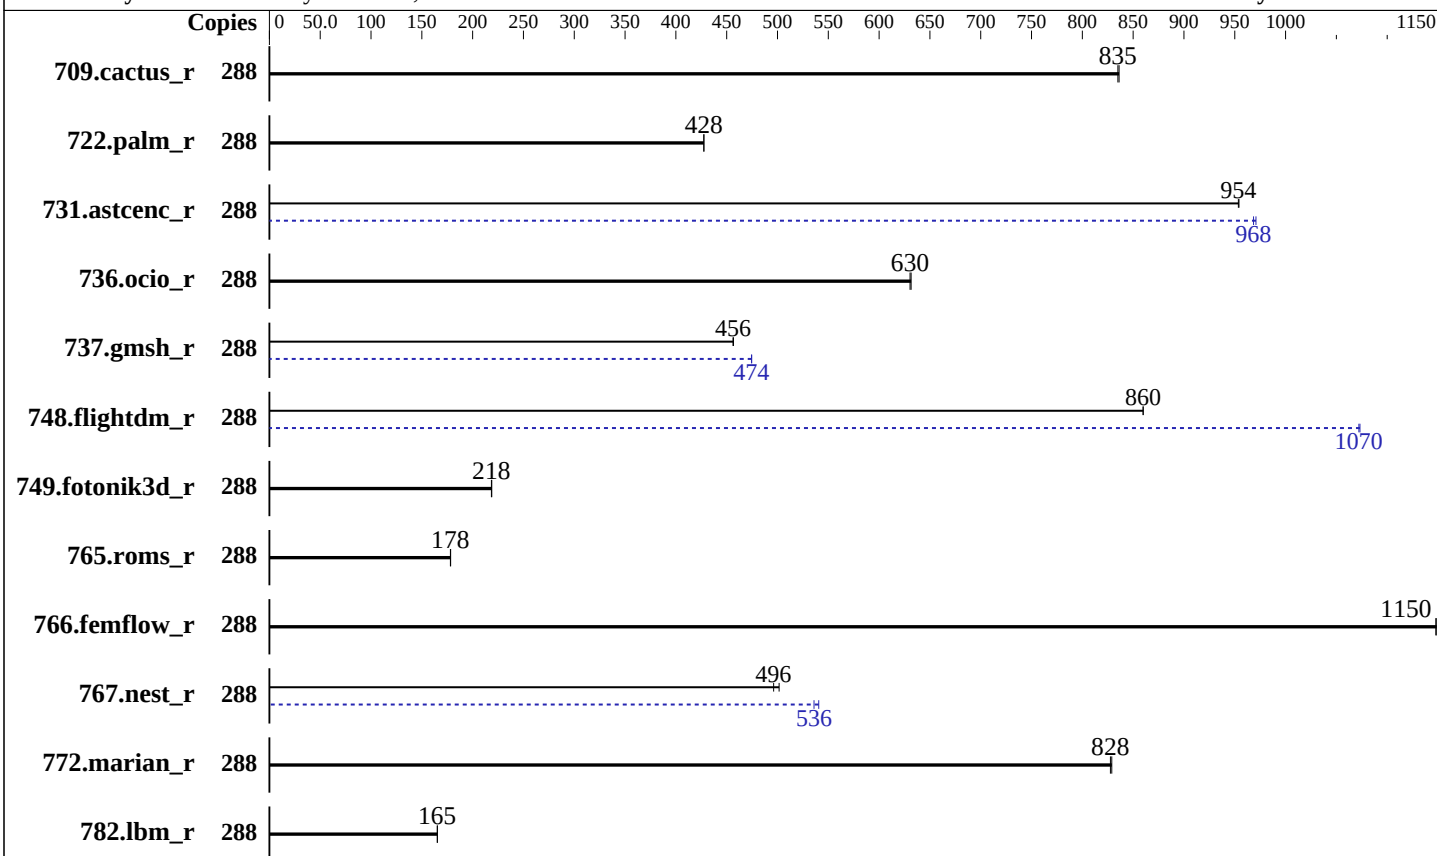

Hardware

CPU Name: Intel Xeon 6780E
Max MHz: 3000
Nominal: 2200
Enabled: 288 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 144 MB I+D on chip per chip, 4 MB shared / 4 cores
L3: 108 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 1 TB NVME SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran
Compiler for Linux
Compiler Category: Vendor
Firmware: Version 03.04.01 released Jun-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: tcmalloc memory allocator v2.18.1
Power Management: BIOS set to prefer performance at the cost
of additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	288	<u>296</u>	<u>835</u>	296	836			288	<u>296</u>	<u>835</u>	296	836		
722.palm_r	288	<u>889</u>	<u>428</u>	889	428			288	<u>889</u>	<u>428</u>	889	428		
731.astcenc_r	288	<u>254</u>	<u>954</u>	254	954			288	<u>250</u>	<u>968</u>	249	971		
736.ocio_r	288	399	632	<u>400</u>	<u>630</u>			288	399	632	<u>400</u>	<u>630</u>		
737.gmsh_r	288	<u>290</u>	<u>456</u>	289	457			288	<u>279</u>	<u>474</u>	279	475		
748.flightdm_r	288	240	860	<u>240</u>	<u>860</u>			288	<u>192</u>	<u>1070</u>	192	1070		
749.fotonik3d_r	288	<u>1524</u>	<u>218</u>	1521	219			288	<u>1524</u>	<u>218</u>	1521	219		
765.roms_r	288	<u>2546</u>	<u>178</u>	2543	178			288	<u>2546</u>	<u>178</u>	2543	178		
766.femflow_r	288	368	1150	<u>368</u>	<u>1150</u>			288	368	1150	<u>368</u>	<u>1150</u>		
767.nest_r	288	455	502	<u>460</u>	<u>496</u>			288	<u>426</u>	<u>536</u>	422	541		
772.marian_r	288	<u>549</u>	<u>828</u>	549	829			288	<u>549</u>	<u>828</u>	549	829		
782.lbm_r	288	<u>999</u>	<u>165</u>	998	165			288	<u>999</u>	<u>165</u>	998	165		

SPECrate®2026_fp_base = 502

SPECrate®2026_fp_peak = 517

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

tcmalloc, a fast, multithreaded malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from github.com/gperftools/gperftools

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

VT Support set to Disable

Hardware P-states set to Disable

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Wed Jun 10 04:59:18 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srvm

Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

2. w

```
04:59:18 up 5:00, 1 user, load average: 70.78, 215.02, 255.13
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             19Mar25  4:58m  2.00s  0.05s sh
reportable-ic2026.0-lin-sierraforest-rate-20260429_revB.sh
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4123834
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4123834
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

```
sh reportable-ic2026.0-lin-sierraforest-rate-20260429_revB.sh
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 -c
ic2026.0-sierraforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
-o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 --configfile
ic2026.0-sierraforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6780E
vendor_id       : GenuineIntel
cpu family      : 6
model           : 175
stepping        : 3
microcode       : 0x3000362
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 144
siblings        : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0:  core ids 0-143
physical id 1:  core ids 0-143
physical id 0:  apicids
```

```
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236
, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286
physical id 1:  apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 5
64, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 61
6, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668
, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720,
722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 7
74, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

From lscpu from util-linux 2.40.4:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 288
On-line CPU(s) list: 0-287
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) 6780E
CPU family: 6
Model: 175
Thread(s) per core: 1
Core(s) per socket: 144
Socket(s): 2
Stepping: 3
Frequency boost: enabled
CPU(s) scaling MHz: 37%
CPU max MHz: 2201.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd frsm md_clear serialize pconfig
arch_lbr ibt flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 9 MiB (288 instances)
L1i cache: 18 MiB (288 instances)
L2 cache: 288 MiB (72 instances)
L3 cache: 216 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-143
NUMA node1 CPU(s): 144-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	108M	216M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 515388 MB
node 0 free: 482682 MB
node 1 cpus: 144-287
node 1 size: 515596 MB
node 1 free: 483160 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1055728784 kB

10. who -r

run-level 3 Mar 19 08:00

11. systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status

(Continued on next page)



IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

```
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE UNIT FILES

```
enabled      apparmor auditd cron getty@ irqbalance issue-generator kbdsettings kdump kdump-early
             kdump-notify nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback
             systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
```

```
enabled-runtime systemd-remount-fs
```

```
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
exchange-bmc-os-info fsidd grub2-once haveged ipmievdm issue-add-ssh-keys kexec-load
lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysexm systemd-time-wait-sync
```

```
systemd-libs systemd-udev systemd-timesyncd tuned
```

```
indirect      systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
```

```
root=UUID=abf2f043-1a11-4e74-925a-2d92d4c037b3
```

```
splash=silent
```

```
mitigations=auto
```

quiet

```
security=apparmor
```

crashkernel=382M,high

crashkernel=72M, low

14. cpupower frequency-info

```
analyzing CPU 163:
```

current policy: frequency should be within 800 MHz and 2.20 GHz.

The governor "ondemand" may decide which speed to use within this range.

```
boost state support:
```

Supported: yes

Active: yes

```
15. tuned-adm active
```

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: throughput-performance

16. sysctl

```
kernel.numa_balancing      1
```

```
kernel.randomize_va_space      2
```

vm.compaction_proactiveness	20
-----------------------------	----

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvice	[madvice]	never
enabled	[always] madvice never				
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	931G	140G	791G	16%	/

21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Platform Notes (Continued)

Vendor: IEIT SYSTEMS
Product: NF5180-M8-A0-R0-00
Product Family: Not specified
Serial: 0000000000

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

13x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
3x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 03.04.01
BIOS Date: 06/10/2025

Compiler Version Notes

C | 782.lbm_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

C++ | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
| 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
| 767.nest_r(base, peak) 772.marian_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
| peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsierraforest -O3 -ffp-model=fast -flt0 -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xsierraforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib  
-ltcmalloc_minimal
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xsierraforest -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500 -xsierraforest -O3  
-ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib  
-ltcmalloc_minimal
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Peak Portability Flags

737.gmsh_r: -fno-associative-math



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

```
731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xsierraforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal
```

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

```
737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xsierraforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal
```



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2026_fp_base = 502

meta brain NF5180G8 (Intel Xeon 6780E)

SPECrate®2026_fp_peak = 517

CPU2026 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Apr-2025

Software Availability: Mar-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/IEIT-Platform-Settings-intel-V2.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/IEIT-Platform-Settings-intel-V2.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-10 04:59:17-0400.

Report generated on 2026-08-11 15:34:46 by CPU2026 PDF formatter (unknown).

Originally published on 2026-07-28.