SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2026_int_base = 585

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: May-2026
Hardware Availability: Oct-2025
Software Availability: Apr-2026

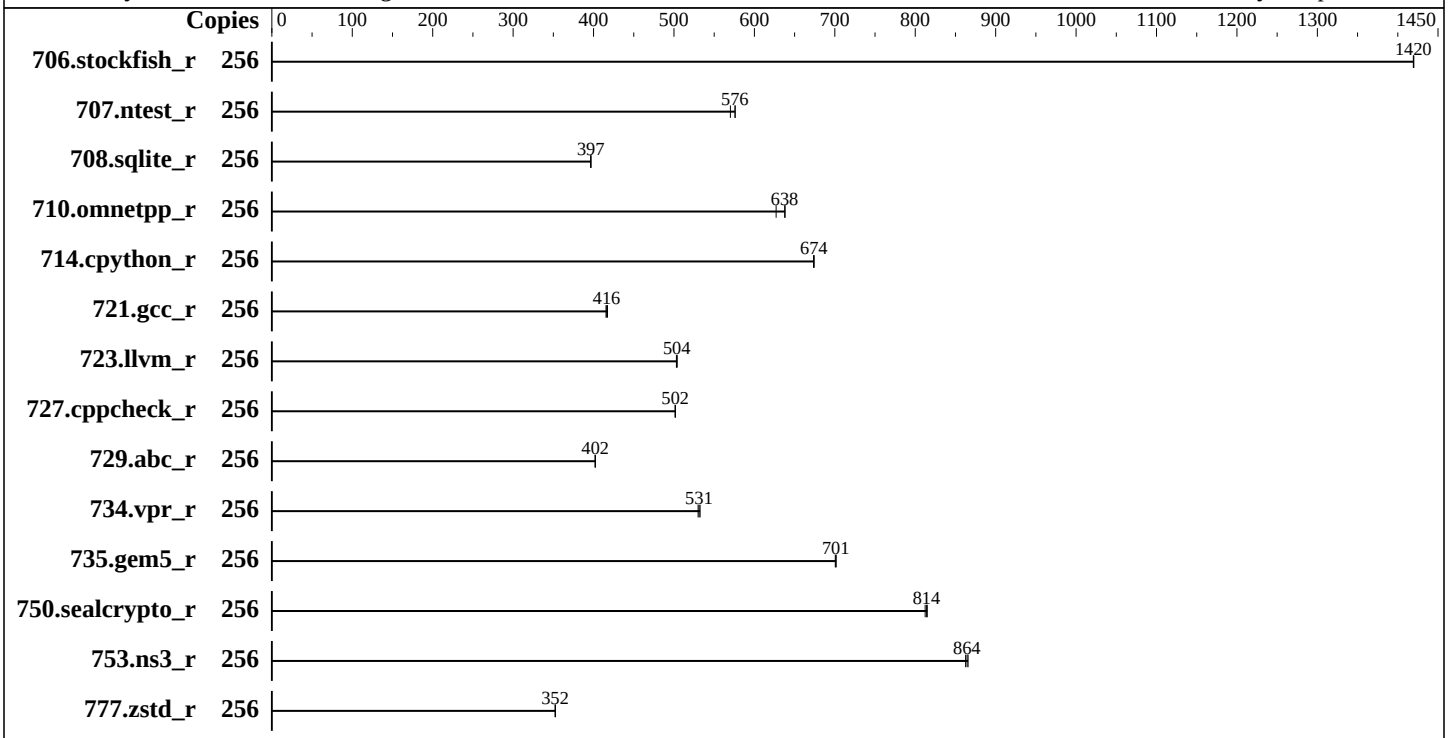

Hardware

CPU Name:	Intel Xeon 6760P
Max MHz:	3800
Nominal:	2200
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	320 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x PCIe SSD, 1.92TB
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Fsas Technologies Inc. BIOS Version V1.0.0.0 R1.5.0 for D4135-A1x. Released Apr-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2026_int_base = 585

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: May-2026
Hardware Availability: Oct-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	256	**227**	**1420**	227	1420	227	1420							
707.ntest_r	256	263	576	266	570	**263**	**576**							
708.sqlite_r	256	341	397	341	397	**341**	**397**							
710.omnetpp_r	256	**195**	**638**	195	638	198	627							
714.cpython_r	256	182	674	**182**	**674**	182	674							
721.gcc_r	256	423	416	**422**	**416**	421	417							
723.llvm_r	256	258	503	258	504	**258**	**504**							
727.cppcheck_r	256	183	502	183	502	**183**	**502**							
729.abc_r	256	**292**	**402**	292	402	292	402							
734.vpr_r	256	223	530	**222**	**531**	222	532							
735.gem5_r	256	**178**	**701**	178	702	178	701							
750.sealcrypto_r	256	**169**	**814**	169	812	168	815							
753.ns3_r	256	**182**	**864**	182	863	181	866							
777.zstd_r	256	468	352	467	353	**468**	**352**							

SPECrate®2026_int_base = 585

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS Settings:
Fan Control = Full
SNC (Sub NUMA) = Enabled
CPU Performance Boost = Aggressive
DCU Streamer Prefetcher = Disabled
UPI Link Frequency Select = 16.0GT/s
XPT Prefetch = Disabled
APS rocketing = Enabled
BIOS Date reported by dmidecode represents the internal BIOS build date.

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Wed May 27 06:11:41 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
 2. w
    06:11:41 up  4:24,  1 user,  load average: 44.29, 177.24, 220.60
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     pts/0    192.168.10.106   01:50    4:18m  1.64s  0.08s -bash

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 2061972
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 2061972
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=42
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: root [priv]
  sshd: root@pts/0
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --copies 256 -c
    ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=128 --define
```

(Continued on next page)

Platform Notes (Continued)

```
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all -n 3 intrate
 runcpu --nobuild --action validate --define default-platform-flags --copies 256 --configfile
   ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=128 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all
   --iterations 3 --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6760P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-31,64-95
    physical id 1: core ids 0-31,64-95
    physical id 0: apicids 0-63,128-191
    physical id 1: apicids 256-319,384-447
 Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6760P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            2
  Stepping:                             1
```

(Continued on next page)

Platform Notes (Continued)

```
  CPU(s) scaling MHz:                  21%
  CPU max MHz:                         3800.0000
  CPU min MHz:                         800.0000
  BogoMIPS:                            4400.00
 Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                       pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                       nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                      pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                           xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                     3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                      ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                     vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                     rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                       clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                       xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                                     avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                       bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                              amx_int8 flush_l1d arch_capabilities
  Virtualization:                      VT-x
  L1d cache:                           6 MiB (128 instances)
  L1i cache:                           8 MiB (128 instances)
  L2 cache:                            256 MiB (128 instances)
  L3 cache:                            640 MiB (2 instances)
  NUMA node(s):                        4
  NUMA node0 CPU(s):                   0-31,128-159
  NUMA node1 CPU(s):                   32-63,160-191
  NUMA node2 CPU(s):                   64-95,192-223
  NUMA node3 CPU(s):                   96-127,224-255
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
 Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       64K       8M   16 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       320M     640M   16 Unified         3 327680        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-31,128-159
  node 0 size: 128614 MB
  node 0 free: 127726 MB
  node 1 cpus: 32-63,160-191
  node 1 size: 129006 MB
  node 1 free: 127863 MB
  node 2 cpus: 64-95,192-223
  node 2 size: 129006 MB
  node 2 free: 128328 MB
  node 3 cpus: 96-127,224-255
  node 3 size: 128891 MB
  node 3 free: 128092 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527892452 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 27 01:48

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled           YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                      issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                    nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                      wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime   systemd-remount-fs
  disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                     chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                    firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                     man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                       smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
                      systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                       systemd-timesyncd vncserver@
  indirect            systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=6490486a-f020-45c4-b83e-03e98fc56a3b
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  tsx=auto

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 107:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/cpu2026
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 btrfs  1.9T  155G  1.8T   9% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Fsas Technologies
    Product:        PRIMERGY RX2540 M8
    Product Family: SERVER
    Serial:         xxxxxxxxxx

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 21. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M321R4GA3EB2-CCPKF 32 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Fsas Technologies
    BIOS Version:      V1.0.0.0 R1.5.0 for D4135-A1x
    BIOS Date:         03/06/2026
    BIOS Revision:     1.5
    Firmware Revision: 3.12
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
       | 753.ns3_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
       | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-26 17:11:40-0400.
Report generated on 2026-08-11 18:27:29 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-08-11.