SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026
Hardware Availability: Mar-2025
Software Availability: May-2026

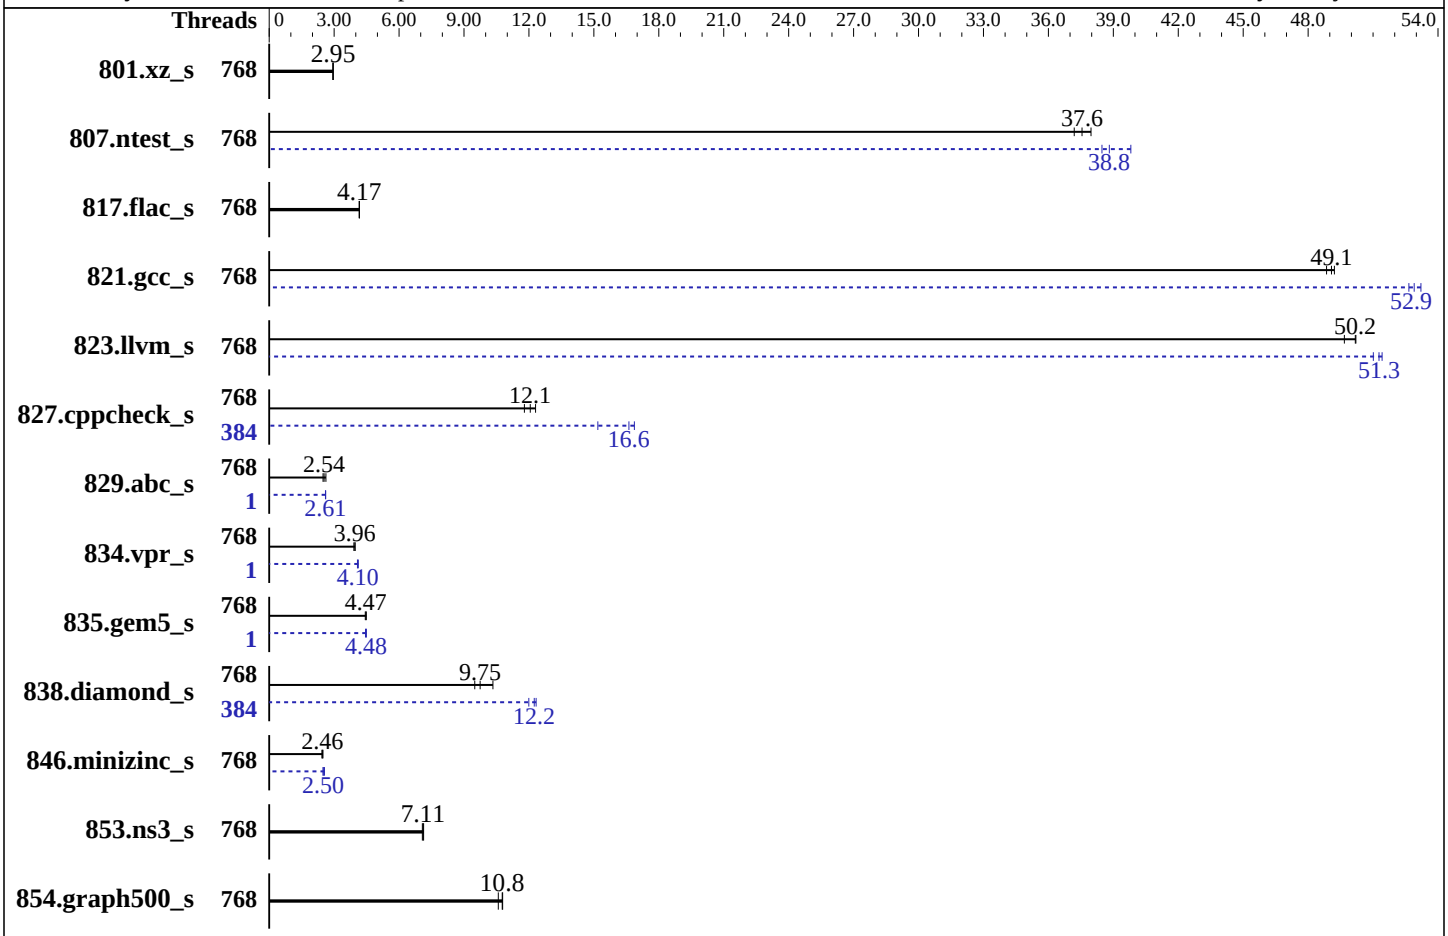

Hardware

CPU Name:	AMD EPYC 9965
Max MHz:	3700
Nominal:	2250
Enabled:	384 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 3.2 TB PCIe NVMe SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP6 (x86_64) Kernel 6.4.0-150600.21-default
Compiler:	C/C++: Version 5.2.0 of AOCC Fortran: Flang v22
Compiler Category:	Vendor
Firmware:	Version 1002 released Oct-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026
Hardware Availability: Mar-2025
Software Availability: May-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	768	**200**	**2.95**	200	2.96	201	2.94	768	**200**	**2.95**	200	2.96	201	2.94
807.ntest_s	768	30.0	38.0	**30.4**	**37.6**	30.7	37.2	768	**29.4**	**38.8**	28.6	39.8	29.6	38.5
817.flac_s	768	417	4.16	**417**	**4.17**	417	4.17	768	417	4.16	**417**	**4.17**	417	4.17
821.gcc_s	768	**42.2**	**49.1**	42.4	48.9	42.1	49.2	768	39.3	52.7	38.9	53.2	**39.1**	**52.9**
823.llvm_s	768	28.1	50.2	**28.1**	**50.2**	28.4	49.7	768	27.7	51.0	27.4	51.4	**27.5**	**51.3**
827.cppcheck_s	768	94.9	11.8	90.9	12.3	**92.8**	**12.1**	384	73.7	15.2	66.3	16.9	**67.3**	**16.6**
829.abc_s	768	**328**	**2.54**	334	2.49	317	2.62	1	**319**	**2.61**	320	2.60	319	2.61
834.vpr_s	768	244	3.91	**241**	**3.96**	241	3.97	1	234	4.08	**233**	**4.10**	232	4.11
835.gem5_s	768	254	4.48	**255**	**4.47**	257	4.44	1	254	4.48	256	4.45	**254**	**4.48**
838.diamond_s	768	96.8	10.3	105	9.50	**103**	**9.75**	384	83.5	12.0	**81.7**	**12.2**	81.2	12.3
846.minizinc_s	768	270	2.48	275	2.44	**273**	**2.46**	768	269	2.49	262	2.55	**268**	**2.50**
853.ns3_s	768	163	7.08	**162**	**7.11**	162	7.13	768	163	7.08	**162**	**7.11**	162	7.13
854.graph500_s	768	57.7	10.6	**56.8**	**10.8**	56.7	10.8	768	57.7	10.6	**56.8**	**10.8**	56.7	10.8

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance

runcpu command invoked through numactl i.e.:
    numactl --physcpubind=0-15 runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-767"
LD_LIBRARY_PATH =
     "/aocc520/amd_speed_aocc520_znver5_A_lib/lib:/aocc520/amd_speed_aocc520_
     znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_THREAD_LIMIT = "768"
```

General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
```

Platform Notes

```
BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
Determinism Control = Manual
DRAM Scrub time = Disabled
Engine Boost = Aggressive
TDP Control = Manual
TDP = 500
PPT Control = Manual
PPT = 500
BMC Configuration:
Fan mode = Full speed mode

 Sysinfo program /aocc520/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Wed Jul 22 12:20:10 2026
```

(Continued on next page)

Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64

------------------------------------------------------------
2. w
   12:20:10 up  2:17,  1 user,  load average: 84.62, 109.15, 74.06
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                10:03   18.00s  2.79s  0.00s /bin/bash ./speed.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 3090993
   max locked memory       (kbytes, -l) 2048
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3090993
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 /bin/bash ./speed.sh
 python3 ./run_amd_speed_aocc520_znver5_A1.py
 runcpu --config amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.174/templogs/preenv.intspeed.174.0.log --lognum 174.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /aocc520

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb10104e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 192
    siblings        : 384
    2 physical ids (chips)
    768 processors (hardware threads)
    physical id 0: core ids 0-191
    physical id 1: core ids 0-191
    physical id 0: apicids 0-383
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 1: apicids 512-895
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                            x86_64
   CPU op-mode(s):                          32-bit, 64-bit
   Address sizes:                           52 bits physical, 57 bits virtual
   Byte Order:                              Little Endian
   CPU(s):                                  768
   On-line CPU(s) list:                     0-767
   Vendor ID:                               AuthenticAMD
   BIOS Vendor ID:                          Advanced Micro Devices, Inc.
   Model name:                              AMD EPYC 9965 192-Core Processor
  BIOS Model name:                    AMD EPYC 9965 192-Core Processor             Unknown CPU @ 2.2GHz
   BIOS CPU family:                         107
   CPU family:                              26
   Model:                                   17
   Thread(s) per core:                      2
   Core(s) per socket:                      192
   Socket(s):                               2
   Stepping:                                0
   Frequency boost:                         enabled
   CPU(s) scaling MHz:                      61%
   CPU max MHz:                             3700.1951
   CPU min MHz:                             1500.0000
   BogoMIPS:                                4492.96
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
 pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
 extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
   cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
 nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
     avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)

Platform Notes (Continued)

```
                                    avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                             flush_l1d debug_swap
  L1d cache:                                 18 MiB (384 instances)
  L1i cache:                                 12 MiB (384 instances)
  L2 cache:                                  384 MiB (384 instances)
  L3 cache:                                  768 MiB (24 instances)
  NUMA node(s):                              2
  NUMA node0 CPU(s):                         0-191,384-575
  NUMA node1 CPU(s):                         192-383,576-767
  Vulnerability Gather data sampling:        Not affected
  Vulnerability Itlb multihit:               Not affected
  Vulnerability L1tf:                        Not affected
  Vulnerability Mds:                         Not affected
  Vulnerability Meltdown:                    Not affected
  Vulnerability Mmio stale data:             Not affected
  Vulnerability Reg file data sampling:      Not affected
  Vulnerability Retbleed:                    Not affected
  Vulnerability Spec rstack overflow:        Not affected
  Vulnerability Spec store bypass:           Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:                  Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                             always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                       Not affected
  Vulnerability Tsx async abort:             Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      18M   12 Data            1    64        1             64
     L1i       32K      12M    8 Instruction     1    64        1             64
     L2         1M     384M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-191,384-575
  node 0 size: 386048 MB
  node 0 free: 383992 MB
  node 1 cpus: 192-383,576-767
  node 1 size: 386725 MB
  node 1 free: 385528 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791321068 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 22 10:03

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tuned udisks2
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=8bcfdda5-8f30-49cc-9aa9-2e306fa29252
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  video=1024x768

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 19:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
```

(Continued on next page)

Platform Notes (Continued)

```
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: latency-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /aocc520
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p4 xfs   2.8T  287G  2.6T  11% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:          ASUSTeK COMPUTER INC.
    Product:         RS720A-E13-RS8U
    Product Family: Server
    Serial:          123456789012

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
  Memory:
    6x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400
    12x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400
    6x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      1002
   BIOS Date:         10/14/2025
   BIOS Revision:     10.2
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base, peak) 827.cppcheck_s(base, peak) 853.ns3_s(base,
       | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base, peak) 817.flac_s(base, peak) 821.gcc_s(base, peak)
       | 823.llvm_s(base, peak) 829.abc_s(base, peak) 834.vpr_s(base, peak)
       | 835.gem5_s(base, peak) 838.diamond_s(base, peak)
       | 846.minizinc_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

823.llvm_s: `-DSPEC_LP64`
827.cppcheck_s: `-DSPEC_LP64`
829.abc_s: `-DSPEC_LP64`
834.vpr_s: `-fno-finite-math-only -DSPEC_LP64`
835.gem5_s: `-fno-finite-math-only -DSPEC_LP64`
838.diamond_s: `-DSPEC_LP64`
846.minizinc_s: `-DSPEC_LP64`
853.ns3_s: `-fno-finite-math-only -DSPEC_LP64`
854.graph500_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

Base Other Flags

C benchmarks:
`-Wno-return-type`

Benchmarks using both C and C++:
`-Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Benchmarks using both C and C++:
`clang++ clang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

854.graph500_s: `basepeak = yes`

C++ benchmarks:

807.ntest_s: `-m64 -std=c++17`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false`
`-fprofile-instr-generate`(pass 1) `-fprofile-instr-use`(pass 2)
`-Ofast -flto -march=znver5 -fveclib=AMDLIBM -ffast-math`
`-zopt -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP`
`-fvirtual-function-elimination -fvisibility=hidden`
`-lamdalloc -lamdlibm -fopenmp=libomp -lomp`

(Continued on next page)

Peak Optimization Flags (Continued)

827.cppcheck_s: Same as 807.ntest_s

853.ns3_s: basepeak = yes

Benchmarks using both C and C++:

801.xz_s: basepeak = yes

817.flac_s: basepeak = yes

821.gcc_s: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-fprofile-instr-generate(pass 1) -fprofile-instr-use(pass 2)
-Ofast -flto -march=znver5 -fveclib=AMDLIBM -ffast-math
-zopt -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -mllvm -unroll-threshold=100
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

823.llvm_s: Same as 821.gcc_s

829.abc_s: Same as 821.gcc_s

834.vpr_s: Same as 821.gcc_s

835.gem5_s: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -mllvm -unroll-threshold=100
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

838.diamond_s: Same as 821.gcc_s

(Continued on next page)

Peak Optimization Flags (Continued)

846.minizinc_s: `Same as 821.gcc_s`

Peak Other Flags

C benchmarks:
`-Wno-return-type`

Benchmarks using both C and C++:
`-Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-08-11.html`
`http://www.spec.org/cpu2026/results/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-08-11.xml`
`http://www.spec.org/cpu2026/results/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-22 00:20:10-0400.
Report generated on 2026-08-11 18:28:04 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-08-11.