



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

**PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz**

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

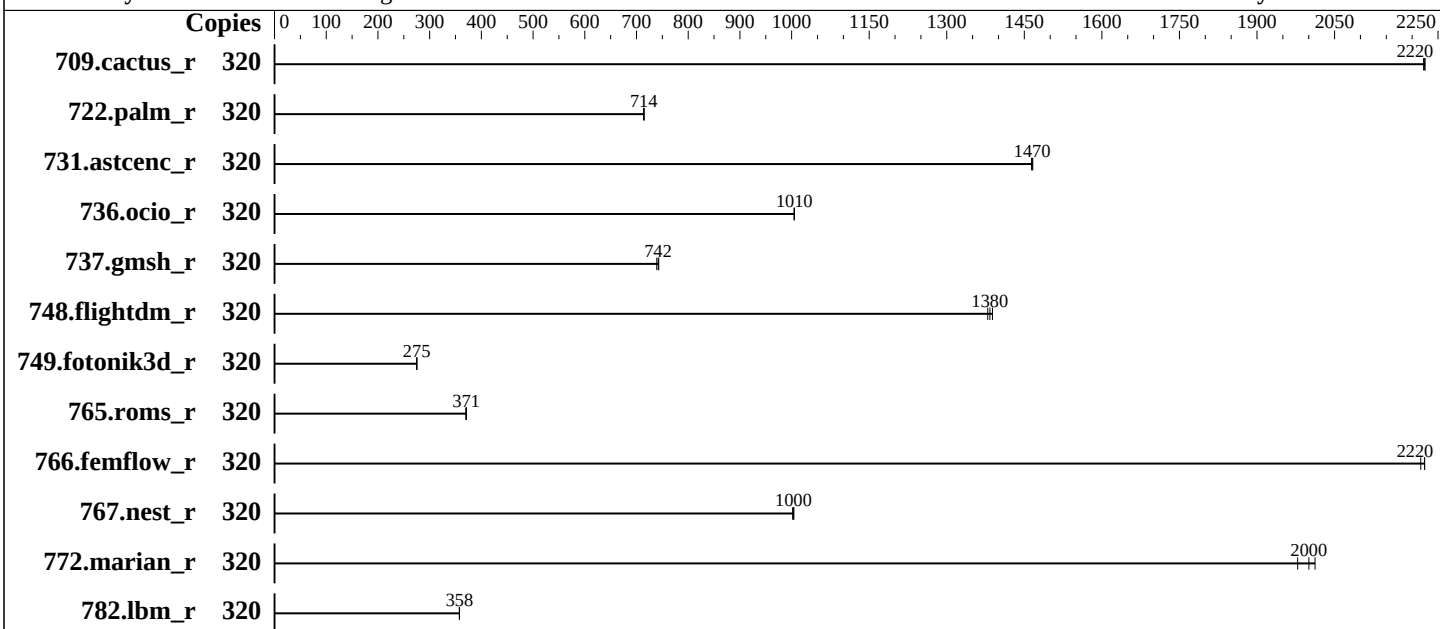

Hardware

CPU Name: AMD EPYC 9845
Max MHz: 3700
Nominal: 2100
Enabled: 320 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x SATA SSD, 1.92 TB
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version
6.4.0-150600.23.22-default
Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category: Vendor
Firmware: Fujitsu BIOS Version V5.0.0.35 R2.13.0 for D4129-A1x. Released Aug-2026
tested as V5.0.0.35 R2.11.0 for D4129-A1x Jan-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	320	<u>123</u>	<u>2220</u>	123	2230	124	2220							
722.palm_r	320	592	714	591	715	<u>591</u>	<u>714</u>							
731.astcenc_r	320	184	1460	<u>183</u>	<u>1470</u>	183	1470							
736.ocio_r	320	<u>279</u>	<u>1010</u>	278	1010	279	1000							
737.gmsh_r	320	198	743	199	739	<u>198</u>	<u>742</u>							
748.flightdm_r	320	165	1390	166	1380	<u>166</u>	<u>1380</u>							
749.fotonik3d_r	320	<u>1345</u>	<u>275</u>	1345	275	1345	275							
765.roms_r	320	1363	370	1358	371	<u>1359</u>	<u>371</u>							
766.femflow_r	320	212	2220	<u>211</u>	<u>2220</u>	211	2220							
767.nest_r	320	253	1000	253	1000	<u>253</u>	<u>1000</u>							
772.marian_r	320	255	1980	<u>253</u>	<u>2000</u>	251	2010							
782.lbm_r	320	512	358	513	357	<u>513</u>	<u>358</u>							

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/Benchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib:/home/Benchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS configuration:

SMT control = Disabled

L1 Stream HW Prefetcher = Disabled

L2 Stream HW Prefetcher = Disabled

Determinism Slider = Power

TDP Control = Manual

TDP Limit = 400

Package Power Limit Control = Manual

Package Power Limit = 400

Power Profile Selection = High Performance

NUMA nodes per socket = NPS2

Probe Filter Organization = Shared

Interleaving Region Size = 1K Region Size

FAN Control = Full

Sysinfo program /home/Benchmark/cpu2026-1.0.1/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Fri Jun 5 04:43:35 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
-----
1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
```

```
-----
1. uname -srvm
Linux 6.4.0-150600.23.22-default #1 SMP PREEMPT_DYNAMIC Fri Sep 13 10:42:50 UTC 2024 (5c05eeb) x86_64
-----
```

```
-----
2. w
04:43:35 up 16:46, 1 user, load average: 135.81, 265.25, 294.29
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU WHAT
root      tty1      -              Thu12      14:02m 3.81s  2.59s python3
./run_aml_rate_aocc510_znver5_B1_fprate.py
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3090000
-----
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

max locked memory (kbytes, -l) 2048
max memory size (kbytes, -m) unlimited
open files (-n) 65536
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3090000
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
python3 ./run_amd_rate_aocc510_znver5_B1_fprate.py
runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026-1.0.1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9845 160-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model          : 17
stepping        : 0
microcode       : 0xb101054
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores       : 160
siblings        : 160
2 physical ids (chips)
320 processors (hardware threads)
physical id 0:  core ids 0-159
physical id 1:  core ids 0-159
physical id 0:  apicids 0-159
physical id 1:  apicids 256-415
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	320
On-line CPU(s) list:	0-319
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9845 160-Core Processor
BIOS Model name:	AMD EPYC 9845 160-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	17
Thread(s) per core:	1
Core(s) per socket:	160
Socket(s):	2
Stepping:	0
Frequency boost:	enabled
CPU(s) scaling MHz:	58%
CPU max MHz:	3718.0659
CPU min MHz:	1500.0000
BogoMIPS:	4193.78

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap amd_lbr_pmc_freeze

Virtualization:

AMD-V

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

L1d cache: 15 MiB (320 instances)
L1i cache: 10 MiB (320 instances)
L2 cache: 320 MiB (320 instances)
L3 cache: 640 MiB (20 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-79
NUMA node1 CPU(s): 80-159
NUMA node2 CPU(s): 160-239
NUMA node3 CPU(s): 240-319
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	15M	12	Data	1	64	1	64
L1i	32K	10M	8	Instruction	1	64	1	64
L2	1M	320M	16	Unified	2	1024	1	64
L3	32M	640M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl` 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-79
node 0 size: 192566 MB
node 0 free: 191356 MB
node 1 cpus: 80-159
node 1 size: 193515 MB
node 1 free: 192301 MB
node 2 cpus: 160-239
node 2 size: 193515 MB
node 2 free: 192199 MB
node 3 cpus: 240-319
node 3 size: 192929 MB

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

node 3 free: 191840 MB

node distances:

node	0	1	2	3
0:	10	12	32	32
1:	12	10	32	32
2:	32	32	10	12
3:	32	32	12	10

9. /proc/meminfo

MemTotal: 791066896 kB

10. who -r

run-level 3 Jun 4 11:57

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
---------	---

enabled-runtime	systemd-remount-fs
-----------------	--------------------

disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievds iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfs-server rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysextd systemd-time-wait-sync systemd-timesyncd tcstd udisks2 virtinterfaced virtlockd virtlogd virtnetworkd virtnodevdevd virtnwfilterd virtsecretvdevd virtstoraged vncserver@
----------	--

indirect	pcscd systemd-userdbd tftpd wickedd
----------	-------------------------------------

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.22-default

root=UUID=0c0fd396-12b8-460e-af5f-2d1dba73ae32

splash=silent

mitigations=auto

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

quiet
security=apparmor
crashkernel=384M,high
crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 83:

current policy: frequency should be within 1.50 GHz and 2.10 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
-----------------------	-------

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/Benchmark/cpu2026-1.0.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	1.4T	118G	1.3T	9%	/home

20. /sys/devices/virtual/dmi/id

Vendor: FUJITSU
Product: PRIMERGY RX2450 M2
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC688AHBRA478N 32 GB 2 rank 6400
12x Samsung M321R4GA3EB2-CCPKF 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU // American Megatrends Inc.
BIOS Version: V5.0.0.35 R2.11.0 for D4129-A1x
BIOS Date: 01/29/2026
BIOS Revision: 2.11
Firmware Revision: 2.47



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Compiler Version Notes

=====
C | 782.lbm_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 709.cactus_r(base) 737.gmsh_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

736.ocio_r: -fno-finite-math-only

737.gmsh_r: -fno-fast-math

748.flightdm_r: -fno-reciprocal-math

767.nest_r: -fno-finite-math-only

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie

-flto -fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc

-lflang

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner

-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto

-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc

-lflang

Fortran benchmarks:

-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-X86-prefetching

-Wl,-mllvm -Wl,-enable-aggressive-gather=true

-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3

-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops

-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9845, 2.10 GHz

SPECrate®2026_fp_base = 925

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html>

<http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml>

<http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-04 15:43:35-0400.

Report generated on 2026-08-26 13:55:58 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-25.