



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

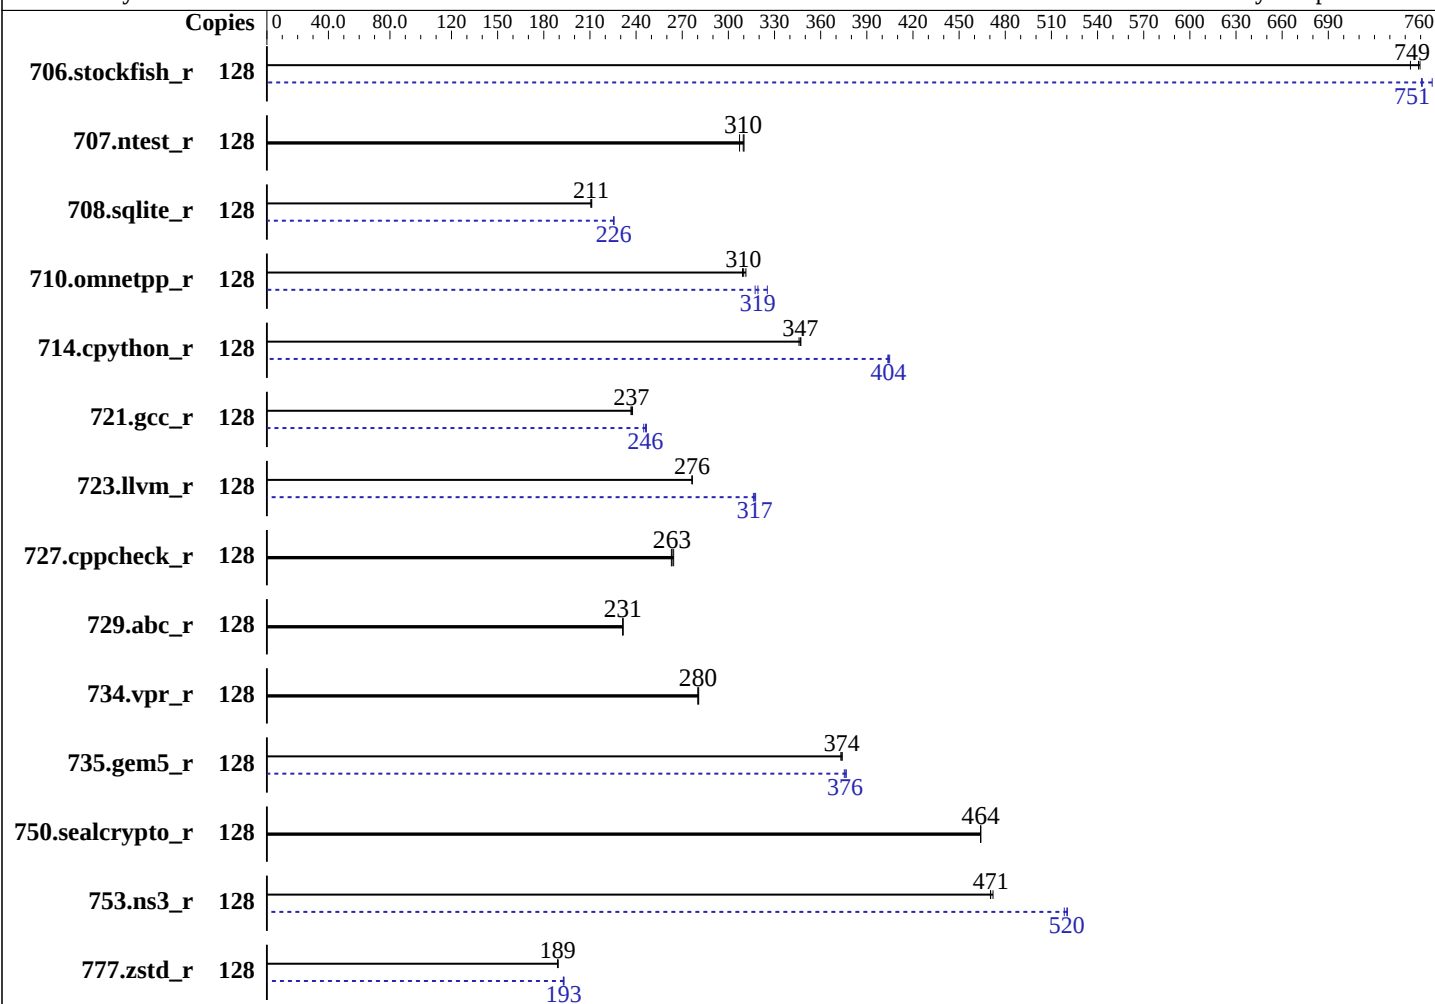

Hardware

CPU Name: Intel Xeon 6530P
Max MHz: 4100
Nominal: 2300
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1, 2 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 144 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 2 x 480 GB NVMe SSD, RAID 1
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: HPE BIOS Version v1.70 04/02/2026 released Apr-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: tcmalloc memory allocator v2.18.1
(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Software (Continued)

Power Management: BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	128	215	750	215	749	217	743	128	213	758	215	751	215	751
707.ntest_r	128	247	307	244	310	245	310	128	247	307	244	310	245	310
708.sqlite_r	128	321	211	321	211	320	211	128	300	226	300	225	300	226
710.omnetpp_r	128	200	311	201	310	201	309	128	195	319	196	317	191	325
714.cpython_r	128	177	346	177	347	177	347	128	152	404	152	404	151	405
721.gcc_r	128	371	237	370	237	369	238	128	356	247	358	245	357	246
723.llvm_r	128	235	276	235	277	235	276	128	205	317	205	316	204	318
727.cppcheck_r	128	175	263	174	263	174	264	128	175	263	174	263	174	264
729.abc_r	128	254	231	254	231	254	231	128	254	231	254	231	254	231
734.vpr_r	128	211	280	211	280	210	281	128	211	280	211	280	210	281
735.gem5_r	128	167	373	167	374	167	374	128	166	375	166	376	165	377
750.sealcrypto_r	128	148	464	148	464	148	464	128	148	464	148	464	148	464
753.ns3_r	128	167	471	166	472	167	470	128	151	520	151	518	151	520
777.zstd_r	128	436	189	436	189	435	189	128	427	193	428	193	427	193

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stopped tuned"



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpu2026/lib"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

tcmalloc, a fast, multithreaded malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from github.com/gperftools/gperftools

Platform Notes

BIOS Configuration: Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Sysinfo program /cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on dl380agen12 Tue Jul 28 15:52:32 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. `uname -srv`
 2. `w`
 3. Username
 4. `ulimit -a`
 5. `sysinfo process ancestry`
 6. `/proc/cpuinfo`
 7. `lscpu`
 8. `numactl --hardware`
 9. `/proc/meminfo`

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -srvn
```

```
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
```

```
2. w
```

```
15:52:32 up 5 min,  2 users,  load average: 0.00, 0.05, 0.02
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      pts/0    10.9.9.14       15:48    8.00s  1.06s  0.01s -bash
```

```
3. Username
```

```
From environment variable $USER:  root
```

```
4. ulimit -a
```

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125262
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125262
virtual memory          (kbytes, -v) unlimited
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
```

```
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
```

```
sshd: root [priv]
```

```
sshd: root@pts/0
```

```
-bash
```

```
-bash
```

```
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 128 -c  
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define cores=64 --define  
physicalfirst --define invoke_with_interleave --define drop_caches --iterations=3 --tune base,peak -o all  
intrate
```

```
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 128 --configfile  
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define cores=64 --define  
physicalfirst --define invoke_with_interleave --define drop_caches --iterations 3 --tune base,peak  
--output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv  
--note-preenv --logfile $SPEC/tmp/CPU2026.003/temlogs/preenv.intrate.003.0.log --lognum 003.0  
--from_runcpu 2
```

```
specperl $SPEC/bin/sysinfo
```

```
$SPEC = /cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6530P
```

```
vendor_id       : GenuineIntel
```

```
cpu family      : 6
```

```
model           : 173
```

```
stepping        : 1
```

```
microcode       : 0x1000423
```

```
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
```

```
cpu cores       : 32
```

```
siblings        : 64
```

```
2 physical ids (chips)
```

```
128 processors (hardware threads)
```

```
physical id 0: core ids 0-31
```

```
physical id 1: core ids 0-31
```

```
physical id 0: apicids 0-63
```

```
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6530P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	2
Stepping:	1
BogoMIPS:	4600.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	3 MiB (64 instances)
L1i cache:	4 MiB (64 instances)
L2 cache:	128 MiB (64 instances)
L3 cache:	288 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-31,64-95
NUMA node1 CPU(s):	32-63,96-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 515679 MB
node 0 free: 514273 MB
node 1 cpus: 32-63,96-127
node 1 size: 515662 MB
node 1 free: 513712 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1056095076 kB

10. who -r

run-level 3 Jul 28 15:47

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status
multi-user running

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd tuned vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default  
root=UUID=0607b7f6-1670-42fe-9d48-701aa4a02ae7  
splash=silent  
quiet  
security=apparmor  
crashkernel=373M,high  
crashkernel=72M,low  
mitigations=auto
```

14. cpupower frequency-info

```
analyzing CPU 23:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio    1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

20. Disk information

SPEC is set to: /cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	btrfs	447G	122G	323G	28%	/

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     HPE ProLiant Compute DL380a Gen12
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Product Family: ProLiant
Serial: CZ2D3707D4

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.70
BIOS Date: 04/02/2026
BIOS Revision: 1.70
Firmware Revision: 1.21

Compiler Version Notes

```
C | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
C++ | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)  
| 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base, peak)  
| 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base, peak)  
| 750.sealcrypto_r(base, peak)
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Peak Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2)
-xHost(pass 1) -ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3 -mfpmath=sse
-funroll-loops -fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal
```

C++ benchmarks:

```
706.stockfish_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal
```

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: Same as 706.stockfish_r

Benchmarks using both C and C++:

```
710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12

(2.30 GHz, Intel Xeon 6530P)

SPECrate®2026_int_base = 314

SPECrate®2026_int_peak = 327

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2025

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

710.omnetpp_r (continued):

-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

721.gcc_r: -m64 -std=c++17 -std=c18 -Wl, -z, muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profddata(pass 2) -xHost(pass 1)

-ffp-model=fast -xgraniterapids(pass 2) -flto

-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3

-mfpmath=sse -funroll-loops -fno-strict-aliasing

-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

723.llvm_r: Same as 721.gcc_r

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: Same as 710.omnetpp_r

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.5.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.5.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-28 09:52:32-0400.

Report generated on 2026-08-26 13:56:28 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-25.