SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9535)

SPECrate®2026_fp_base = 760

SPECrate®2026_fp_peak = 783

CPU2026 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026
Hardware Availability: Dec-2025
Software Availability: Jan-2026

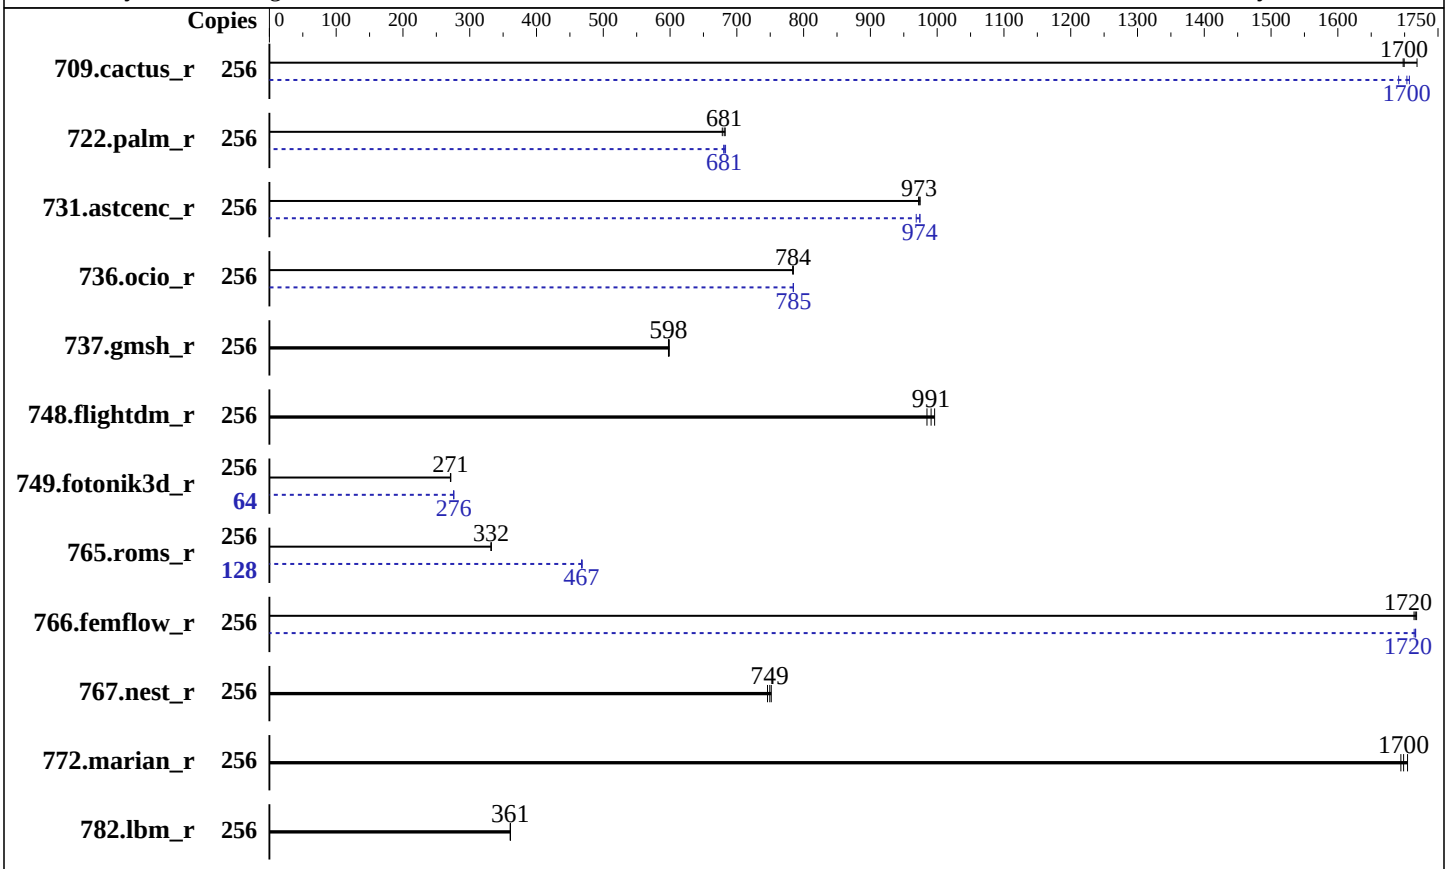

Hardware

CPU Name:	AMD EPYC 9535
Max MHz:	4300
Nominal:	2400
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 4 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Version 01.14.00 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9535)

SPECrate®2026_fp_base = 760

SPECrate®2026_fp_peak = 783

CPU2026 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026
Hardware Availability: Dec-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	**129**	**1700**	129	1700	128	1720	256	**129**	**1700**	129	1710	130	1690
722.palm_r	256	495	683	**496**	**681**	498	678	256	**496**	**681**	497	680	495	683
731.astcenc_r	256	221	975	**221**	**973**	221	972	256	221	974	222	969	**221**	**974**
736.ocio_r	256	286	785	**286**	**784**	286	784	256	286	784	285	785	**285**	**785**
737.gmsh_r	256	**197**	**598**	196	599	197	598	256	**197**	**598**	196	599	197	598
748.flightdm_r	256	186	985	184	996	**185**	**991**	256	186	985	184	996	**185**	**991**
749.fotonik3d_r	256	1092	271	1090	272	**1091**	**271**	64	268	276	268	276	**268**	**276**
765.roms_r	256	**1214**	**332**	1214	332	1214	332	128	**431**	**467**	430	468	431	467
766.femflow_r	256	219	1720	219	1710	**219**	**1720**	256	219	1710	219	1720	**219**	**1720**
767.nest_r	256	270	752	272	746	**271**	**749**	256	270	752	272	746	**271**	**749**
772.marian_r	256	239	1690	237	1700	**238**	**1700**	256	239	1690	237	1700	**238**	**1700**
782.lbm_r	256	407	361	**407**	**361**	406	361	256	407	361	**407**	**361**	406	361

SPECrate®2026_fp_base = 760

SPECrate®2026_fp_peak = 783

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2026/amd_rate_aocc510_znver5_B_lib/lib:/home/CPU2026/amd_rate_
     aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

Platform Notes

```
 BIOS configuration:
 NUMA nodes per socket = NPS4
 Determinism Slider = Power
 cTDP Control = Manual
 cTDP = 500
 Package Power Limit Control = Manual
 Package Power Limit  = 500

 Sysinfo program /home/CPU2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Thu Jul 30 01:47:02 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
   01:47:02 up  5:23,  1 user,  load average: 110.66, 212.58, 234.43
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                20:23    5:22m 11.14s 10.02s python3 ./run_amd_rate_aocc510_znver5_B1.py

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190083
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
```

(Continued on next page)

Platform Notes (Continued)

```
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 6190083
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_rate_aocc510_znver5_B1.py
 runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.031/templogs/preenv.fprate.031.0.log --lognum 031.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9535 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00215a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids
   0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
    physical id 1: core ids
   0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
    physical id 0: apicids
   0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: apicids
   256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
    64-471,480-487,496-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               256
   On-line CPU(s) list:                  0-255
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9535 64-Core Processor
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   64
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   103%
   CPU max MHz:                          2400.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4792.58
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                         svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                         pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                         vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                         flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                                         amd_lbr_pmc_freeze
   Virtualization:                       AMD-V
   L1d cache:                            6 MiB (128 instances)
   L1i cache:                            4 MiB (128 instances)
   L2 cache:                             128 MiB (128 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L3 cache:                              512 MiB (32 instances)
  NUMA node(s):                          8
  NUMA node0 CPU(s):                     0-15,128-143
  NUMA node1 CPU(s):                     16-31,144-159
  NUMA node2 CPU(s):                     32-47,160-175
  NUMA node3 CPU(s):                     48-63,176-191
  NUMA node4 CPU(s):                     64-79,192-207
  NUMA node5 CPU(s):                     80-95,208-223
  NUMA node6 CPU(s):                     96-111,224-239
  NUMA node7 CPU(s):                     112-127,240-255
  Vulnerability Gather data sampling:    Not affected
  Vulnerability Itlb multihit:           Not affected
  Vulnerability L1tf:                    Not affected
  Vulnerability Mds:                     Not affected
  Vulnerability Meltdown:                Not affected
  Vulnerability Mmio stale data:         Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:                Not affected
  Vulnerability Spec rstack overflow:    Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                         always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                   Not affected
  Vulnerability Tsx async abort:         Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         1M     128M   16 Unified         2  1024        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-15,128-143
  node 0 size: 193049 MB
  node 0 free: 191952 MB
  node 1 cpus: 16-31,144-159
  node 1 size: 193527 MB
  node 1 free: 192471 MB
  node 2 cpus: 32-47,160-175
  node 2 size: 193527 MB
  node 2 free: 192536 MB
  node 3 cpus: 48-63,176-191
```

(Continued on next page)

Platform Notes (Continued)

```
   node 3 size: 193488 MB
   node 3 free: 192472 MB
   node 4 cpus: 64-79,192-207
   node 4 size: 193527 MB
   node 4 free: 192408 MB
   node 5 cpus: 80-95,208-223
   node 5 size: 193527 MB
   node 5 free: 192502 MB
   node 6 cpus: 96-111,224-239
   node 6 size: 193527 MB
   node 6 free: 192505 MB
   node 7 cpus: 112-127,240-255
   node 7 size: 193373 MB
   node 7 free: 192320 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584689060 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 29 20:23

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT              LOAD   ACTIVE SUB    DESCRIPTION
  * logrotate.service loaded failed failed Rotate log files

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
```

(Continued on next page)

Platform Notes (Continued)

```
                  issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                 nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
  enabled-runtime  systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                 firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                 kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                 serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
                     wickedd-dhcp6 wickedd-nanny
  indirect          systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 153:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/CPU2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 xfs   929G   70G  860G   8% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Maginfra
    Product:        QR8228-D3
    Product Family: Not specified
    Serial:         00000000
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 23. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
     11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
     1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      01.14.00
    BIOS Date:         12/25/2025
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
        | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
        | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

736.ocio_r: -fno-finite-math-only
737.gmsh_r: -fno-fast-math
748.flightdm_r: -fno-reciprocal-math
767.nest_r: -fno-finite-math-only

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

Peak Portability Flags

736.ocio_r: -fno-finite-math-only
737.gmsh_r: -fno-fast-math
748.flightdm_r: -fno-reciprocal-math
767.nest_r: -fno-finite-math-only

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -lflang

736.ocio_r: Same as 731.astcenc_r

748.flightdm_r: basepeak = yes

766.femflow_r: Same as 731.astcenc_r

767.nest_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: -m64 -Mstandard
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

749.fotonik3d_r: -m64 -Mstandard
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Ofast -march=znver5 -fveclib=AMDLIBM -flto -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

765.roms_r: Same as 749.fotonik3d_r

Benchmarks using both C and C++:

709.cactus_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -lflang

737.gmsh_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.0.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.0.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-30 01:47:02-0400.
Report generated on 2026-08-26 13:56:55 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-08-25.