# SPEC CPU®2026 Floating Point Rate Result



## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

## D55Q-2U (Intel Xeon 6787P)

SPECrate®2026_fp_base = 634

SPECrate®2026_fp_peak = Not Run

| | | | |
|---|---|---|---|
| **CPU2026 License:** | 9050 | **Test Date:** | May-2026 |
| **Test Sponsor:** | Quanta Computer Inc. | **Hardware Availability:** | Feb-2025 |
| **Tested by:** | Quanta Computer Inc. | **Software Availability:** | Apr-2026 |

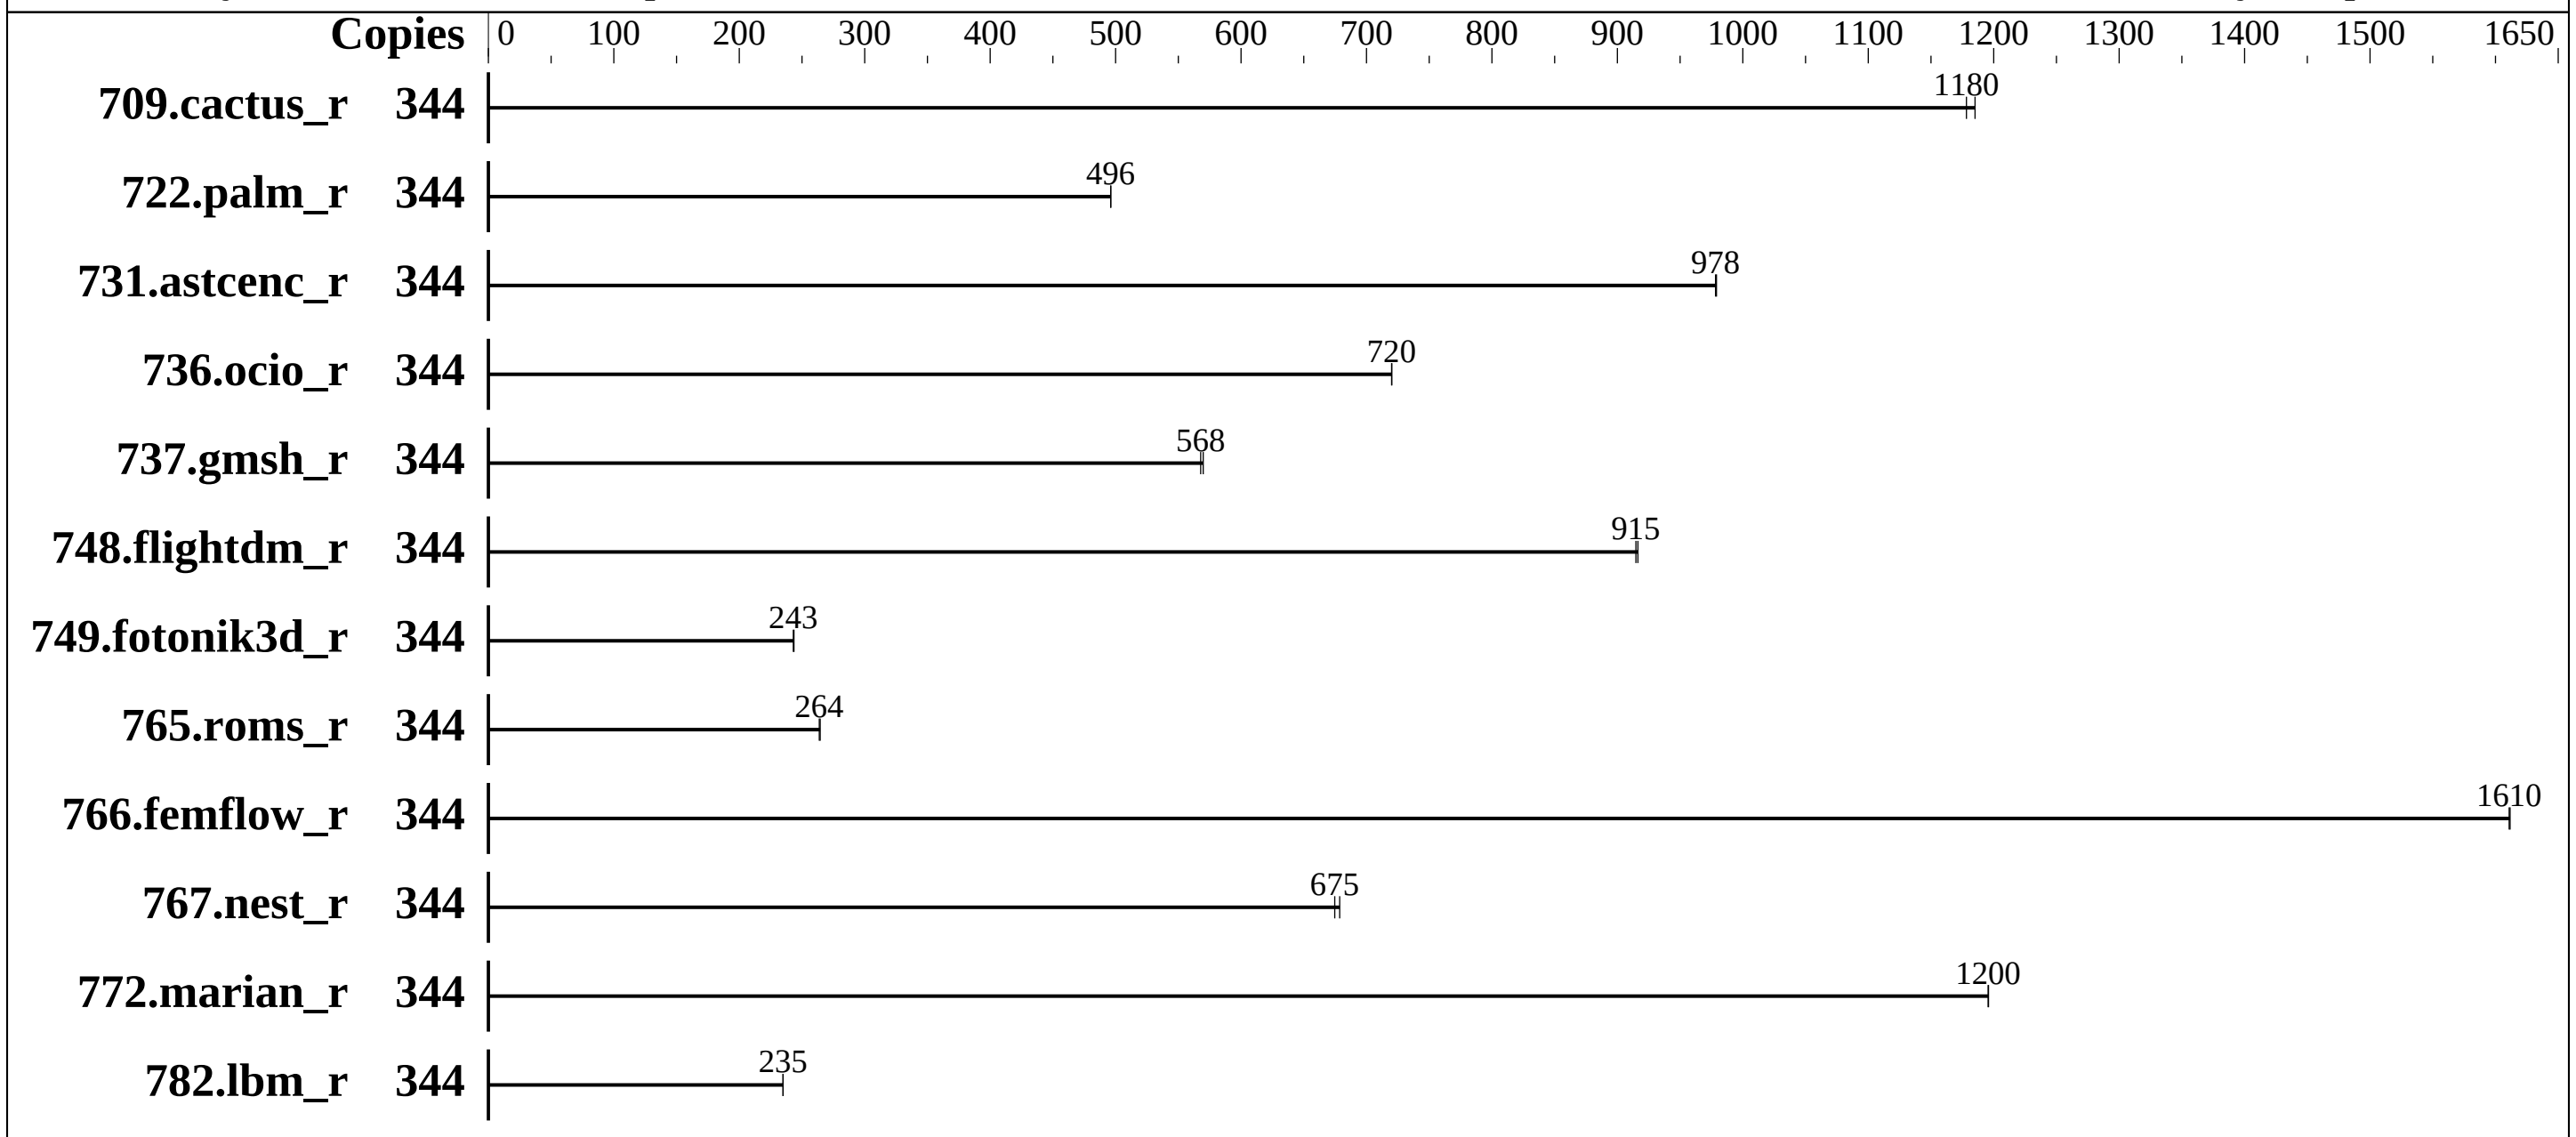


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6787P |
| Max MHz: | 3800 |
| Nominal: | 2000 |
| Enabled: | 172 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 Chips |
| Cache L1: | 64 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 336 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 1 x 960 GB NVME SSD |
| Cooling: | Air |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default |
| Compiler: | C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux |
| Compiler Category: | Vendor |
| Firmware: | Version 3A21.QCT301 released Apr-2026 |
| File System: | xfs |
| System State: | Run Level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator v5.3 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 709.cactus_r | 344 | 249 | 1190 | **250** | **1180** | | | | | | | | | |
| 722.palm_r | 344 | **915** | **496** | 915 | 496 | | | | | | | | | |
| 731.astcenc_r | 344 | **295** | **978** | 295 | 979 | | | | | | | | | |
| 736.ocio_r | 344 | **418** | **720** | 418 | 720 | | | | | | | | | |
| 737.gmsh_r | 344 | **278** | **568** | 277 | 570 | | | | | | | | | |
| 748.flightdm_r | 344 | 269 | 916 | **269** | **915** | | | | | | | | | |
| 749.fotonik3d_r | 344 | **1636** | **243** | 1633 | 244 | | | | | | | | | |
| 765.roms_r | 344 | 2049 | 264 | **2054** | **264** | | | | | | | | | |
| 766.femflow_r | 344 | 313 | 1610 | **313** | **1610** | | | | | | | | | |
| 767.nest_r | 344 | 402 | 679 | **404** | **675** | | | | | | | | | |
| 772.marian_r | 344 | 454 | 1200 | **454** | **1200** | | | | | | | | | |
| 782.lbm_r | 344 | **839** | **235** | 839 | 235 | | | | | | | | | |

**SPECrate®2026_fp_base = 634**

**SPECrate®2026_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

**(Continued on next page)**

## General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS Configuration :
Adjacent Cache Prefetch set to Disable
SNC set to Enable
Energy/Performance Bias set to Performance
Hardware P-States set to Disable
Package C State set to C6(non Retention) state

 Sysinfo program /root/cpu2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Sat May 30 19:40:27 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
```

(Continued on next page)

## Platform Notes (Continued)

```
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64

------------------------------------------------------------
2. w
   19:40:27 up  4:38,  1 user,  load average: 244.12, 320.29, 333.71
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:03    4:38m  1.32s  0.02s /bin/bash ./test_rate.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4123711
  max locked memory       (kbytes, -l) unlimited
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024000
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4123711
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
```


**(Continued on next page)**

## Platform Notes (Continued)

```
 -bash
 /bin/bash ./test_rate.sh
 /bin/bash ./test_rate.sh
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
   ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
   ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all
   --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.104/templogs/preenv.fprate.104.0.log --lognum 104.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000423
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 86
    siblings        : 172
    2 physical ids (chips)
    344 processors (hardware threads)
    physical id 0: core ids 0-42,64-106
    physical id 1: core ids 0-42,64-106
    physical id 0: apicids 0-85,128-213
    physical id 1: apicids 256-341,384-469
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                        x86_64
  CPU op-mode(s):                      32-bit, 64-bit
  Address sizes:                       52 bits physical, 57 bits virtual
  Byte Order:                          Little Endian
  CPU(s):                              344
  On-line CPU(s) list:                 0-343
  Vendor ID:                           GenuineIntel
  BIOS Vendor ID:                      Intel(R) Corporation
  Model name:                          Intel(R) Xeon(R) 6787P
```

(Continued on next page)

## Platform Notes (Continued)

```
BIOS Model name:                  Intel(R) Xeon(R) 6787P  CPU @ 2.0GHz
BIOS CPU family:                  179
CPU family:                       6
Model:                            173
Thread(s) per core:               2
Core(s) per socket:               86
Socket(s):                        2
Stepping:                         1
CPU(s) scaling MHz:               23%
CPU max MHz:                      3800.0000
CPU min MHz:                      800.0000
BogoMIPS:                         4000.00
Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                  pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                  pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                  nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                  pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                  xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                  tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                  3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                  ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                  vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                  rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                  clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                  xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                  split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                  arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                  umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                  avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                  cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                  pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                  arch_capabilities
Virtualization:                   VT-x
L1d cache:                        8.1 MiB (172 instances)
L1i cache:                        10.8 MiB (172 instances)
L2 cache:                         344 MiB (172 instances)
L3 cache:                         672 MiB (2 instances)
NUMA node(s):                     4
NUMA node0 CPU(s):                0-42,172-214
NUMA node1 CPU(s):                43-85,215-257
NUMA node2 CPU(s):                86-128,258-300
NUMA node3 CPU(s):                129-171,301-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
```

(Continued on next page)

## Platform Notes (Continued)

```
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     8.1M   12 Data            1     64        1             64
     L1i       64K    10.8M   16 Instruction     1     64        1             64
     L2         2M     344M   16 Unified         2   2048        1             64
     L3       336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42,172-214
  node 0 size: 257368 MB
  node 0 free: 254814 MB
  node 1 cpus: 43-85,215-257
  node 1 size: 258025 MB
  node 1 free: 255278 MB
  node 2 cpus: 86-128,258-300
  node 2 size: 257986 MB
  node 2 free: 255543 MB
  node 3 cpus: 129-171,301-343
  node 3 size: 257573 MB
  node 3 free: 255001 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055697168 kB

------------------------------------------------------------
10. who -r
```

(Continued on next page)

## Platform Notes (Continued)

```
  run-level 3 May 30 15:03

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      degraded

 ------------------------------------------------------------
 12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

 ------------------------------------------------------------
 13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot apparmor auditd cron getty@ issue-generator kbdsettings postfix
                   purge-kernels rollback sep5 sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         YaST2-Second-Stage autofs autoyast-initscripts blk-availability boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell
                   display-manager ebtables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged
                   hwloc-dump-hwdata ipmi ipmievd irqbalance issue-add-ssh-keys kdump kdump-early
                   kdump-notify kexec-load klog lunmask lvm2-monitor man-db-create multipathd nfs nfs-blkmap
                   nscd nvmefc-boot-connections nvmf-autoconnect rpcbind rpmconfigcheck rsyncd rsyslog
                   serial-getty@ smartd smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tuned udisks2 vncserver@
  indirect         systemd-userdbd wickedd

 ------------------------------------------------------------
 14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=ef37f719-a8b7-425b-a775-187849075d47
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=372M,high
  crashkernel=72M,low

 ------------------------------------------------------------
 15. cpupower frequency-info
  analyzing CPU 180:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
```

(Continued on next page)

## Platform Notes (Continued)

```
      Supported: yes
      Active: yes

 ------------------------------------------------------------
 16. sysctl
   kernel.numa_balancing                1
   kernel.randomize_va_space            2
   vm.compaction_proactiveness         20
   vm.dirty_background_bytes            0
   vm.dirty_background_ratio           10
   vm.dirty_bytes                       0
   vm.dirty_expire_centisecs         3000
   vm.dirty_ratio                      20
   vm.dirty_writeback_centisecs       500
   vm.dirtytime_expire_seconds      43200
   vm.extfrag_threshold               500
   vm.min_unmapped_ratio                1
   vm.nr_hugepages                      0
   vm.nr_hugepages_mempolicy            0
   vm.nr_overcommit_hugepages           0
   vm.swappiness                       60
   vm.watermark_boost_factor        15000
   vm.watermark_scale_factor           10
   vm.zone_reclaim_mode                 0

 ------------------------------------------------------------
 17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

 ------------------------------------------------------------
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6
```

(Continued on next page)

## Platform Notes (Continued)

```
------------------------------------------------------------
20. Disk information
SPEC is set to: /root/cpu2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p1 xfs   615G  132G  483G  22% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D55Q-2U

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400
    8x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A21.QCT301
   BIOS Date:         04/29/2026
   BIOS Revision:     5.35
   Firmware Revision: 3.29
```

## Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
        | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

## Compiler Version Notes (Continued)

```
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both C and C++:
`icpx icx`

## Base Portability Flags

737.gmsh_r: `-fno-associative-math`

## Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:
```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Quanta-Computer-Inc-Birch_Stream-Platform-Settings-V1.6.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Quanta-Computer-Inc-Birch_Stream-Platform-Settings-V1.6.xml



For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-30 07:40:27-0400.
Report generated on 2026-09-08 18:10:55 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-08.