



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

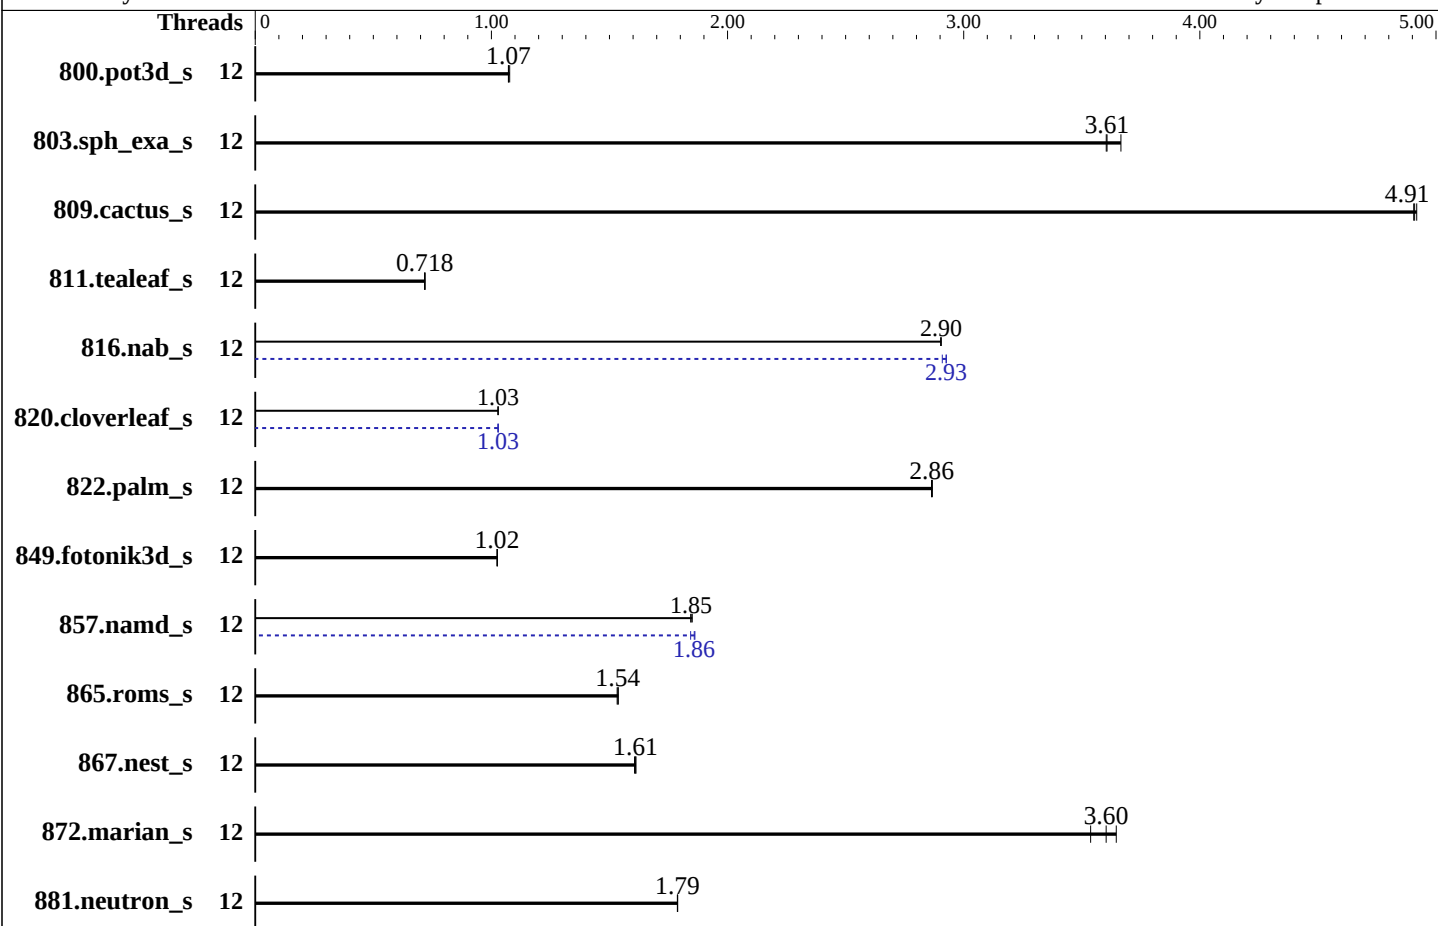

Hardware

CPU Name: Intel Xeon 6377P
Max MHz: 5700
Nominal: 3100
Enabled: 12 cores, 1 chip
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 36 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)
Storage: 1 x 960 GB NVMe SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: HPE BIOS Version v2.50 06/25/2026 released Jun-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator v5.3
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	12	625	1.08	628	1.07	<u>627</u>	<u>1.07</u>	12	625	1.08	628	1.07	<u>627</u>	<u>1.07</u>
803.sph_exa_s	12	<u>343</u>	<u>3.61</u>	338	3.67	344	3.60	12	<u>343</u>	<u>3.61</u>	338	3.67	344	3.60
809.cactus_s	12	229	4.91	228	4.92	<u>229</u>	<u>4.91</u>	12	229	4.91	228	4.92	<u>229</u>	<u>4.91</u>
811.tealeaf_s	12	774	0.719	<u>776</u>	<u>0.718</u>	777	0.717	12	774	0.719	<u>776</u>	<u>0.718</u>	777	0.717
816.nab_s	12	<u>388</u>	<u>2.90</u>	388	2.90	388	2.90	12	<u>385</u>	<u>2.93</u>	385	2.93	387	2.91
820.cloverleaf_s	12	834	1.03	833	1.03	<u>833</u>	<u>1.03</u>	12	<u>833</u>	<u>1.03</u>	833	1.03	833	1.03
822.palm_s	12	429	2.86	428	2.87	<u>429</u>	<u>2.86</u>	12	429	2.86	428	2.87	<u>429</u>	<u>2.86</u>
849.fotonik3d_s	12	644	1.02	<u>644</u>	<u>1.02</u>	644	1.03	12	644	1.02	<u>644</u>	<u>1.02</u>	644	1.03
857.namd_s	12	<u>787</u>	<u>1.85</u>	785	1.85	787	1.84	12	780	1.86	<u>781</u>	<u>1.86</u>	788	1.84
865.roms_s	12	711	1.53	<u>710</u>	<u>1.54</u>	709	1.54	12	711	1.53	<u>710</u>	<u>1.54</u>	709	1.54
867.nest_s	12	<u>1341</u>	<u>1.61</u>	1345	1.61	1340	1.61	12	<u>1341</u>	<u>1.61</u>	1345	1.61	1340	1.61
872.marian_s	12	297	3.65	306	3.54	<u>300</u>	<u>3.60</u>	12	297	3.65	306	3.54	<u>300</u>	<u>3.60</u>
881.neutron_s	12	<u>456</u>	<u>1.79</u>	456	1.79	456	1.79	12	<u>456</u>	<u>1.79</u>	456	1.79	456	1.79

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

tuned-adm profile was set to balanced using 'tuned-adm profile balanced'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2026/lib"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Workload Profile set to Custom

Power Regulator set to Dynamic Power Savings Mode

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Mon Jul 13 03:39:37 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

22. dmidecode

23. BIOS

1. uname -srvrn

Linux 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501) x86_64

2. w

03:39:37 up 1 min, 3 users, load average: 0.52, 0.34, 0.13

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
------	-----	------	--------	------	------	------	------

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	256695
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	256695
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

sshd: /usr/sbin/sshd -D [listener] 1 of 10-100 startups

sshd: root [priv]

sshd: root@notty

bash -c cd \$SPEC/ && \$SPEC/fpspeed-avx512.sh

runcpu --nobuild --reportable --action validate --define default-platform-flags -c

ic2026.0-core-avx2-cpu2026-1.0.1-speed-20260429.cfg --iterations=3 --threads 12 --define cores=12 --tune
base,peak -o all --define drop_caches fpspeed

runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
ic2026.0-core-avx2-cpu2026-1.0.1-speed-20260429.cfg --iterations 3 --threads 12 --define cores=12 --tune
base,peak --output_format all --define drop_caches --nopower --runmode speed --tune base:peak --size
refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6377P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 183
stepping        : 1
microcode       : 0x137
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 12
siblings        : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-11
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 48 bits virtual
Byte Order:         Little Endian
CPU(s):             12
On-line CPU(s) list: 0-11
Vendor ID:          GenuineIntel
Model name:         Intel(R) Xeon(R) 6377P
CPU family:         6
Model:              183
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s):          1
Stepping:           1
CPU(s) scaling MHz: 14%
CPU max MHz:        5700.0000
CPU min MHz:        800.0000
BogoMIPS:           6220.80
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs_enhanced
tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb
intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
user_shstk avx_vnni dtherm ida arat pln pts hwp hwp_notify
hwp_act_window hwp_epp hwp_pkg_req hfi vnmi umip pku ospke waitpkg
gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear
serialize pconfig arch_lbr ibt flush_l1d arch_capabilities

Virtualization:

VT-x

L1d cache:

576 KiB (12 instances)

L1i cache:

384 KiB (12 instances)

L2 cache:

24 MiB (12 instances)

L3 cache:

36 MiB (1 instance)

NUMA node(s):

1

NUMA node0 CPU(s):

0-11

Vulnerability Gather data sampling:

Not affected

Vulnerability Indirect target selection:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer
sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
PBR SB-eIBRS SW sequence; BHI BHI_DIS_S

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	576K	12	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	2M	24M	16	Unified	2	2048	1	64
L3	36M	36M	12	Unified	3	49152	1	64

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-11

node 0 size: 64203 MB

node 0 free: 63467 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 65744224 kB

10. who -r

run-level 3 Jul 13 03:38

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bggd serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2

update-system-flatpaks upower vncserver@ wpa_supplicant@

indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
root=UUID=16b66c39-3265-46a8-be7f-7591e5d8731a
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

analyzing CPU 2:

current policy: frequency should be within 800 MHz and 5.70 GHz.

The governor "powersave" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: balanced

16. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none             511
max_ptes_shared           256
max_ptes_swap             64
pages_to_scan             4096
scan_sleep_millisecs     10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	931G	213G	716G	23%	/home

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     ProLiant MicroServer Gen11
Product Family: ProLiant
Serial:      JRT31JQXTD
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     2.50
BIOS Date:        06/25/2026
BIOS Revision:    2.50
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Firmware Revision: 1.62

Compiler Version Notes

```
=====
C      | 811.tealeaf_s(base, peak) 816.nab_s(base, peak) 881.neutron_s(base,
      | peak)
=====
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====
```

```
=====
C++    | 803.sph_exa_s(base, peak) 857.namd_s(base, peak) 867.nest_s(base,
      | peak) 872.marian_s(base, peak)
=====
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C | 809.cactus_s(base, peak)
=====
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 800.pot3d_s(base, peak) 820.cloverleaf_s(base, peak)
      | 822.palm_s(base, peak) 849.fotonik3d_s(base, peak) 865.roms_s(base,
      | peak)
=====
```

```
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xCORE-AVX2 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xCORE-AVX2 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -pthread -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500  
-xCORE-AVX2 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500 -xCORE-AVX2 -O3 -ffp-model=fast  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: basepeak = yes

816.nab_s: -m64 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2
-ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: basepeak = yes

857.namd_s: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2
-ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -pthread -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

867.nest_s: basepeak = yes

872.marian_s: basepeak = yes

Fortran benchmarks:

800.pot3d_s: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECspeed®2026_fp_base = 1.87

SPECspeed®2026_fp_peak = 1.88

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

```
820.cloverleaf_s: -m64 -stand f18 -wl, -z, muldefs  
-wl, -plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2  
-ffp-model=fast -flt0 -qopt-mem-layout-trans=4 -O3  
-mfpmath=sse -funroll-loops -nostandard-realloc-lhs  
-align array32byte -auto -DSPEC_OPENMP -fiopenmp  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

822.palm_s: basepeak = yes

849.fotonik3d_s: basepeak = yes

865.roms_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-12 18:09:37-0400.

Report generated on 2026-09-08 18:10:53 by CPU2026 PDF formatter (unknown).

Originally published on 2026-09-08.