SPEC CPU®2026 Floating Point Rate Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_fp_base = 896

SPECrate®2026_fp_peak = 918

CPU2026 License:	3	**Test Date:**	Aug-2026
Test Sponsor:	HPE	**Hardware Availability:**	Mar-2025
Tested by:	HPE	**Software Availability:**	Jan-2026

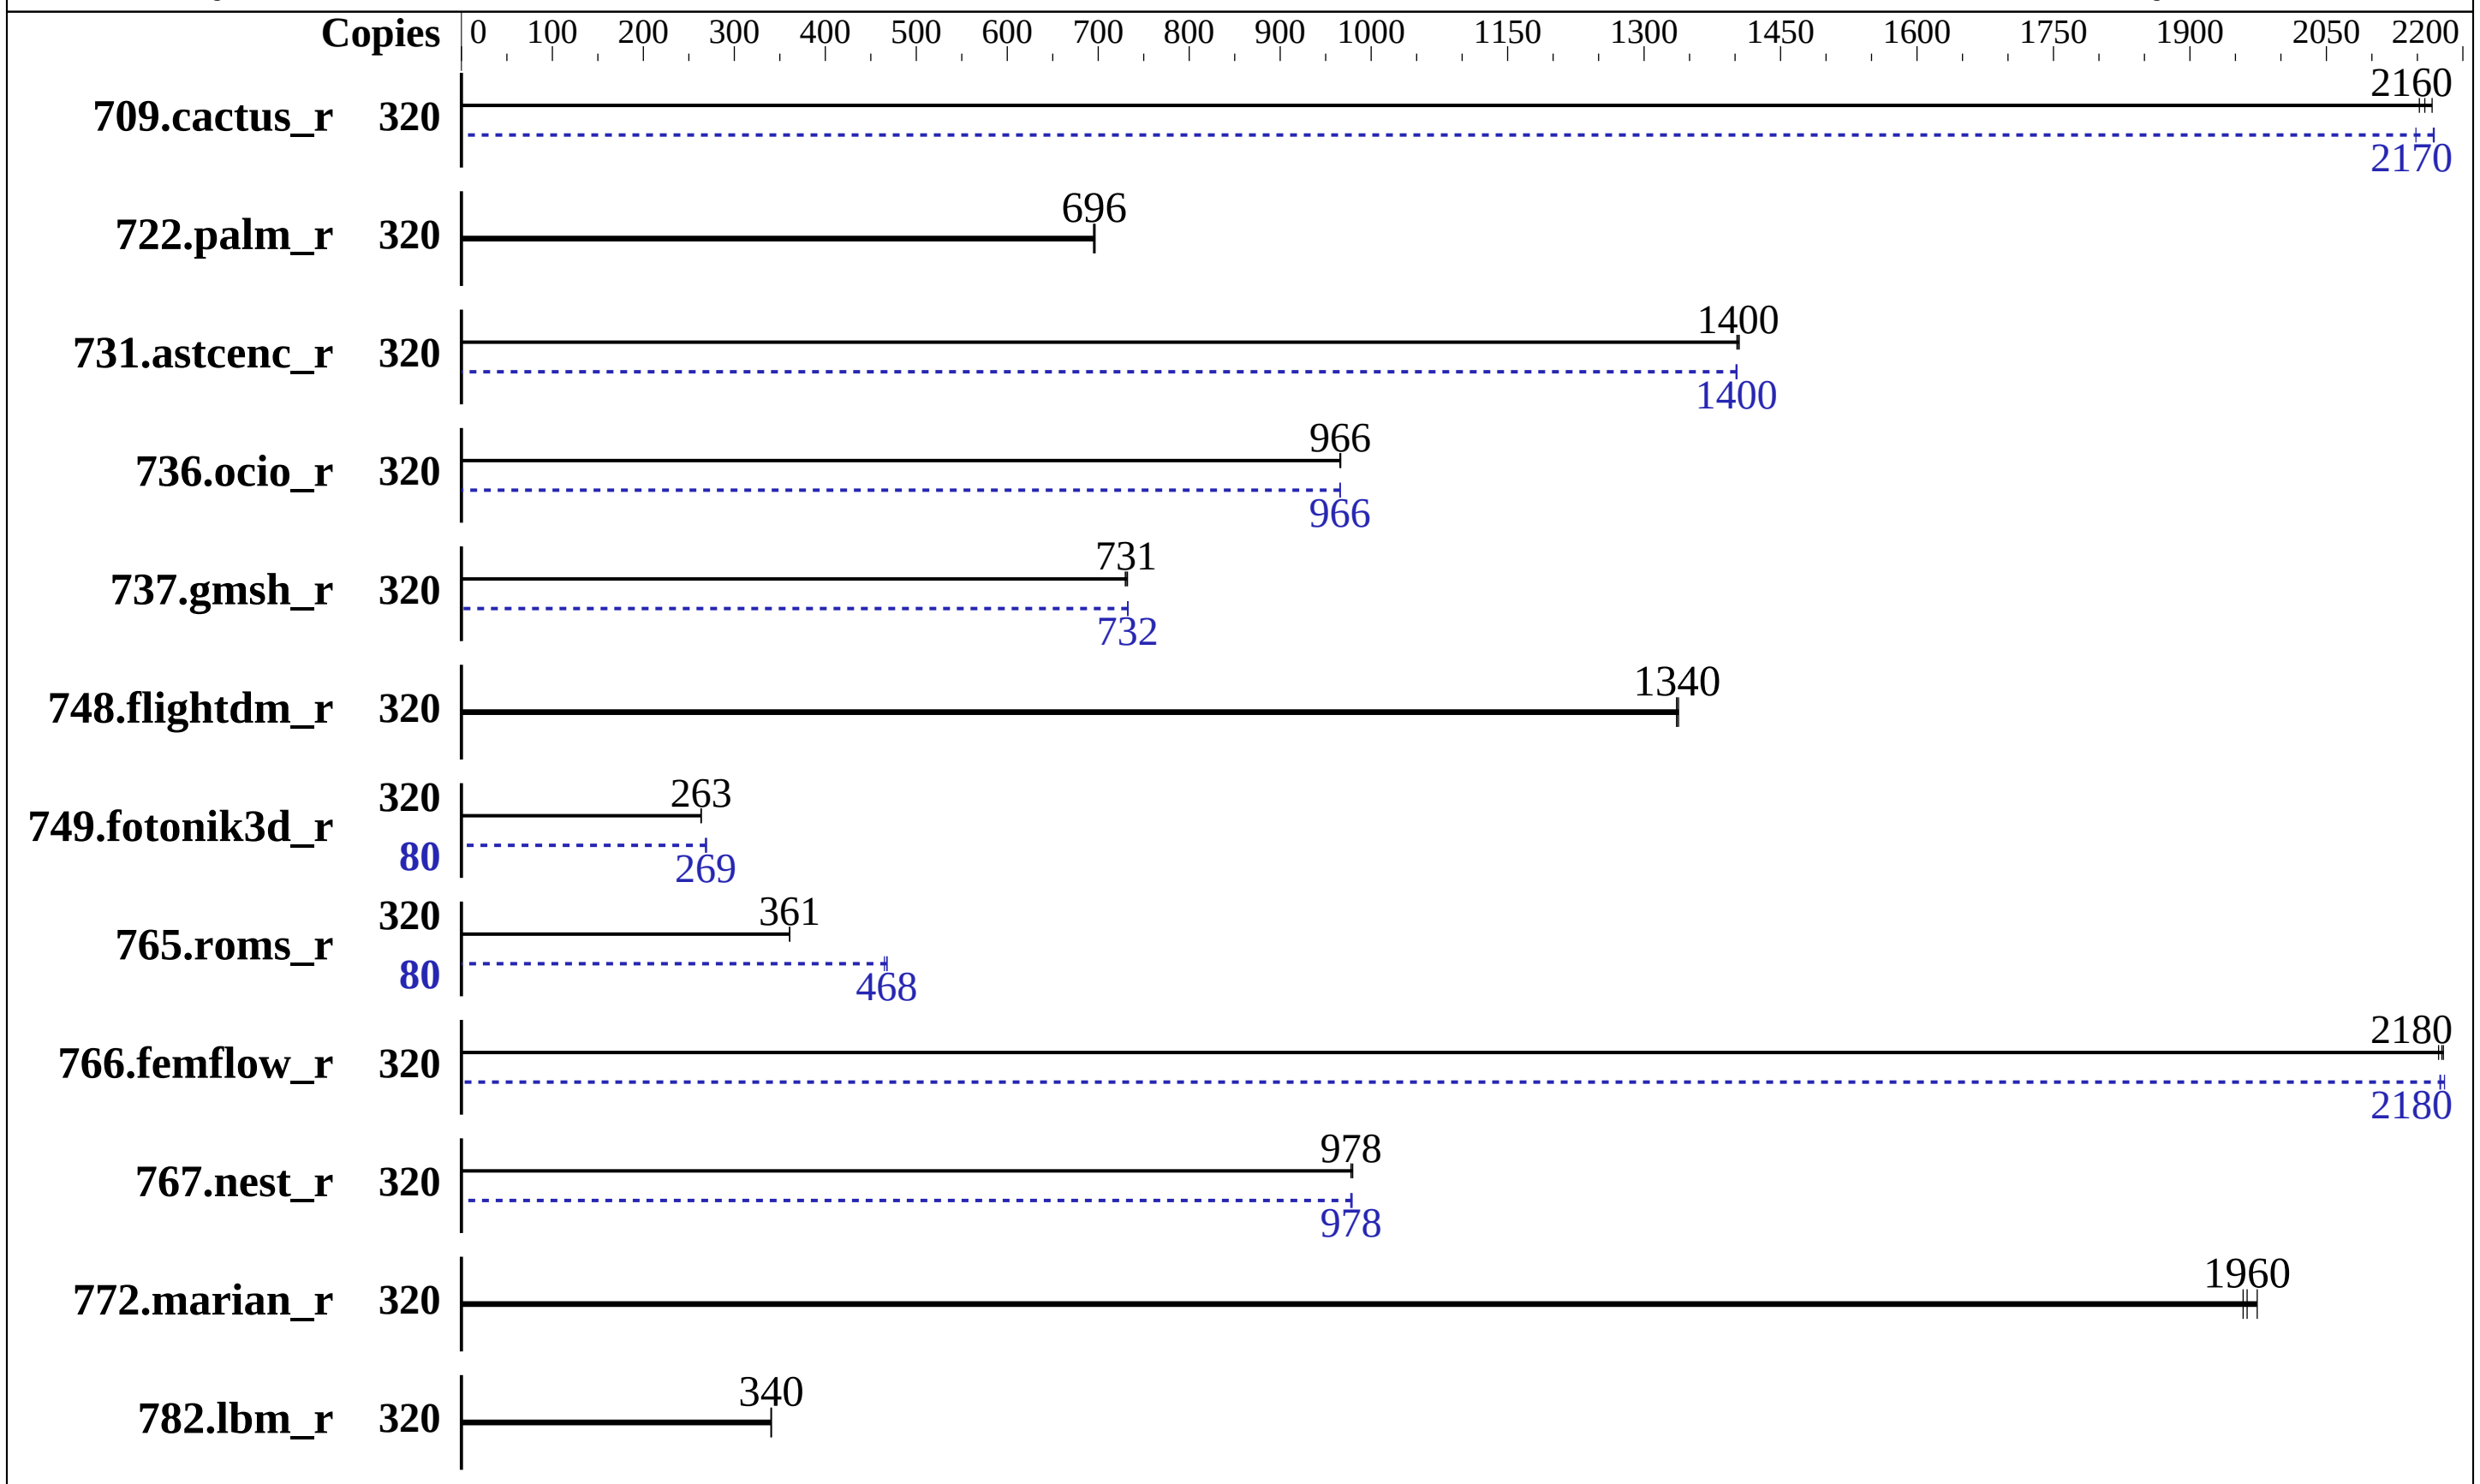

Hardware

CPU Name:	AMD EPYC 9845
Max MHz:	3700
Nominal:	2100
Enabled:	320 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 480 GB NVMe SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.53.6-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	HPE BIOS Version v3.12 04/02/2026 released Apr-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_fp_base = 896

SPECrate®2026_fp_peak = 918

CPU2026 License:	3	**Test Date:**	Aug-2026
Test Sponsor:	HPE	**Hardware Availability:**	Mar-2025
Tested by:	HPE	**Software Availability:**	Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	320	128	2150	**127**	**2160**	127	2170	320	**127**	**2170**	128	2150	127	2170
722.palm_r	320	608	695	606	697	**607**	**696**	320	608	695	606	697	**607**	**696**
731.astcenc_r	320	192	1400	**192**	**1400**	191	1400	320	192	1400	192	1400	**192**	**1400**
736.ocio_r	320	**290**	**966**	290	967	290	966	320	290	966	**290**	**966**	290	966
737.gmsh_r	320	201	730	**201**	**731**	201	732	320	201	732	200	733	**201**	**732**
748.flightdm_r	320	**171**	**1340**	172	1340	171	1340	320	**171**	**1340**	172	1340	171	1340
749.fotonik3d_r	320	**1404**	**263**	1405	263	1404	264	80	**344**	**269**	343	269	345	268
765.roms_r	320	1396	361	**1396**	**361**	1397	361	80	**269**	**468**	269	468	271	465
766.femflow_r	320	215	2180	**216**	**2180**	216	2170	320	**216**	**2180**	215	2180	216	2170
767.nest_r	320	259	980	**259**	**978**	260	978	320	**259**	**978**	260	978	259	979
772.marian_r	320	258	1960	256	1970	**257**	**1960**	320	258	1960	256	1970	**257**	**1960**
782.lbm_r	320	538	341	539	340	**539**	**340**	320	538	341	539	340	**539**	**340**

SPECrate®2026_fp_base = **896**

SPECrate®2026_fp_peak = **918**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2026_rate_2/amd_rate_aocc510_znver5_B_lib/lib:/home/cpu2026_ra
     te_2/amd_rate_aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
Memory using Ubuntu 24.04
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
NUMA memory domains per socket set to Two memory domains per socket
Thermal Configuration set to Maximum Cooling
AMD SMT Option set to Disabled
Workload Profile set to Custom
 L1 HW Prefetcher set to Disabled
 L2 HW Prefetcher set to Disabled
Package Power Limit Control Mode set to Manual
 Package Power Limit Value set to 400

 Sysinfo program /home/cpu2026_rate_2/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
```

(Continued on next page)

Platform Notes (Continued)

```
running on tbls12ex6401 Wed Aug 19 12:17:38 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul  1 14:54:47 UTC 2025 (8ab7501) x86_64

------------------------------------------------------------
2. w
   12:17:38 up 11:03,  8 users,  load average: 0.25, 0.07, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    172.16.0.100     02:29    1:38   0.10s  0.10s -bash
  root     pts/1    172.16.0.100     08:27    3:47m  0.05s  0.05s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190358
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190358
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash $SPEC/run_rate_sh.sh
 python3 ./run_rate.py
 runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026_rate_2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9845 160-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101059
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 160
    siblings        : 160
    2 physical ids (chips)
    320 processors (hardware threads)
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 0: core ids 0-159
    physical id 1: core ids 0-159
    physical id 0: apicids 0-159
    physical id 1: apicids 256-415
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               320
  On-line CPU(s) list:                  0-319
  Vendor ID:                            AuthenticAMD
  Model name:                           AMD EPYC 9845 160-Core Processor
  CPU family:                           26
  Model:                                17
  Thread(s) per core:                   1
  Core(s) per socket:                   160
  Socket(s):                            2
  Stepping:                             0
  BogoMIPS:                             4193.77
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                                        pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                                        nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                                        monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                                        xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                                        cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                                        ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                        clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru
                                        wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock
                                        nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                        pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
                                        v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                                        vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
                                        avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed
```

(Continued on next page)

Platform Notes (Continued)

```
                                          srso_user_kernel_no amd_lbr_pmc_freeze
  Virtualization:                         AMD-V
  L1d cache:                              15 MiB (320 instances)
  L1i cache:                              10 MiB (320 instances)
  L2 cache:                               320 MiB (320 instances)
  L3 cache:                               640 MiB (20 instances)
  NUMA node(s):                           4
  NUMA node0 CPU(s):                      0-79
  NUMA node1 CPU(s):                      80-159
  NUMA node2 CPU(s):                      160-239
  NUMA node3 CPU(s):                      240-319
  Vulnerability Gather data sampling:     Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:            Not affected
  Vulnerability L1tf:                     Not affected
  Vulnerability Mds:                      Not affected
  Vulnerability Meltdown:                 Not affected
  Vulnerability Mmio stale data:          Not affected
  Vulnerability Reg file data sampling:   Not affected
  Vulnerability Retbleed:                 Not affected
  Vulnerability Spec rstack overflow:     Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer
                                          sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                          disabled; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsx async abort:          Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      15M   12 Data            1    64        1             64
     L1i       32K      10M    8 Instruction     1    64        1             64
     L2         1M     320M   16 Unified         2  1024        1             64
     L3        32M     640M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-79
  node 0 size: 386630 MB
  node 0 free: 385604 MB
  node 1 cpus: 80-159
  node 1 size: 387050 MB
  node 1 free: 384984 MB
  node 2 cpus: 160-239
```

(Continued on next page)

Platform Notes (Continued)

```
    node 2 size: 387050 MB
    node 2 free: 386148 MB
    node 3 cpus: 240-319
    node 3 size: 386887 MB
    node 3 free: 385479 MB
    node distances:
    node   0   1   2   3
      0:  10  12  32  32
      1:  12  10  32  32
      2:  32  32  10  12
      3:  32  32  12  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       1584762016 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Aug 19 01:15

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
    Default Target  Status
    multi-user      running

  ------------------------------------------------------------
  12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                     bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                     lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                     rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                     wickedd-nanny wpa_supplicant
    enabled-runtime  systemd-remount-fs
    disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                     autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                     chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
                     exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
                     hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
                     multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
                     rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
                     snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                     systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                     udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
    indirect         pcscd saned@ systemd-userdbd wickedd

  ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
  root=UUID=cd092176-2be7-4625-9c6a-0a85c8595192
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 69:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            0
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                       8
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                        1
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2026_rate_2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  447G   92G  350G  21% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385G11-012

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    10x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
    14x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      3.12
   BIOS Date:         04/02/2026
   BIOS Revision:     3.12
   Firmware Revision: 1.73
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
        | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
        | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
`flang`

Benchmarks using both C and C++:
`clang++ clang`

Base Portability Flags

736.ocio_r: `-fno-finite-math-only`
737.gmsh_r: `-fno-fast-math`
748.flightdm_r: `-fno-reciprocal-math`
767.nest_r: `-fno-finite-math-only`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

Peak Portability Flags

736.ocio_r: -fno-finite-math-only
737.gmsh_r: -fno-fast-math
748.flightdm_r: -fno-reciprocal-math
767.nest_r: -fno-finite-math-only

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -lflang

736.ocio_r: Same as 731.astcenc_r

748.flightdm_r: basepeak = yes

766.femflow_r: Same as 731.astcenc_r

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: -m64 -Mstandard
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Ofast -march=znver5 -fveclib=AMDLIBM -flto -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

765.roms_r: Same as 749.fotonik3d_r

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.12.html
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.12.xml
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-19 02:47:37-0400.
Report generated on 2026-09-08 18:11:03 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-08.