SPEC CPU®2026 Integer Rate Result

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9335)

SPECrate®2026_int_base = 372

SPECrate®2026_int_peak = 373

CPU2026 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026
Hardware Availability: Dec-2025
Software Availability: Jan-2026

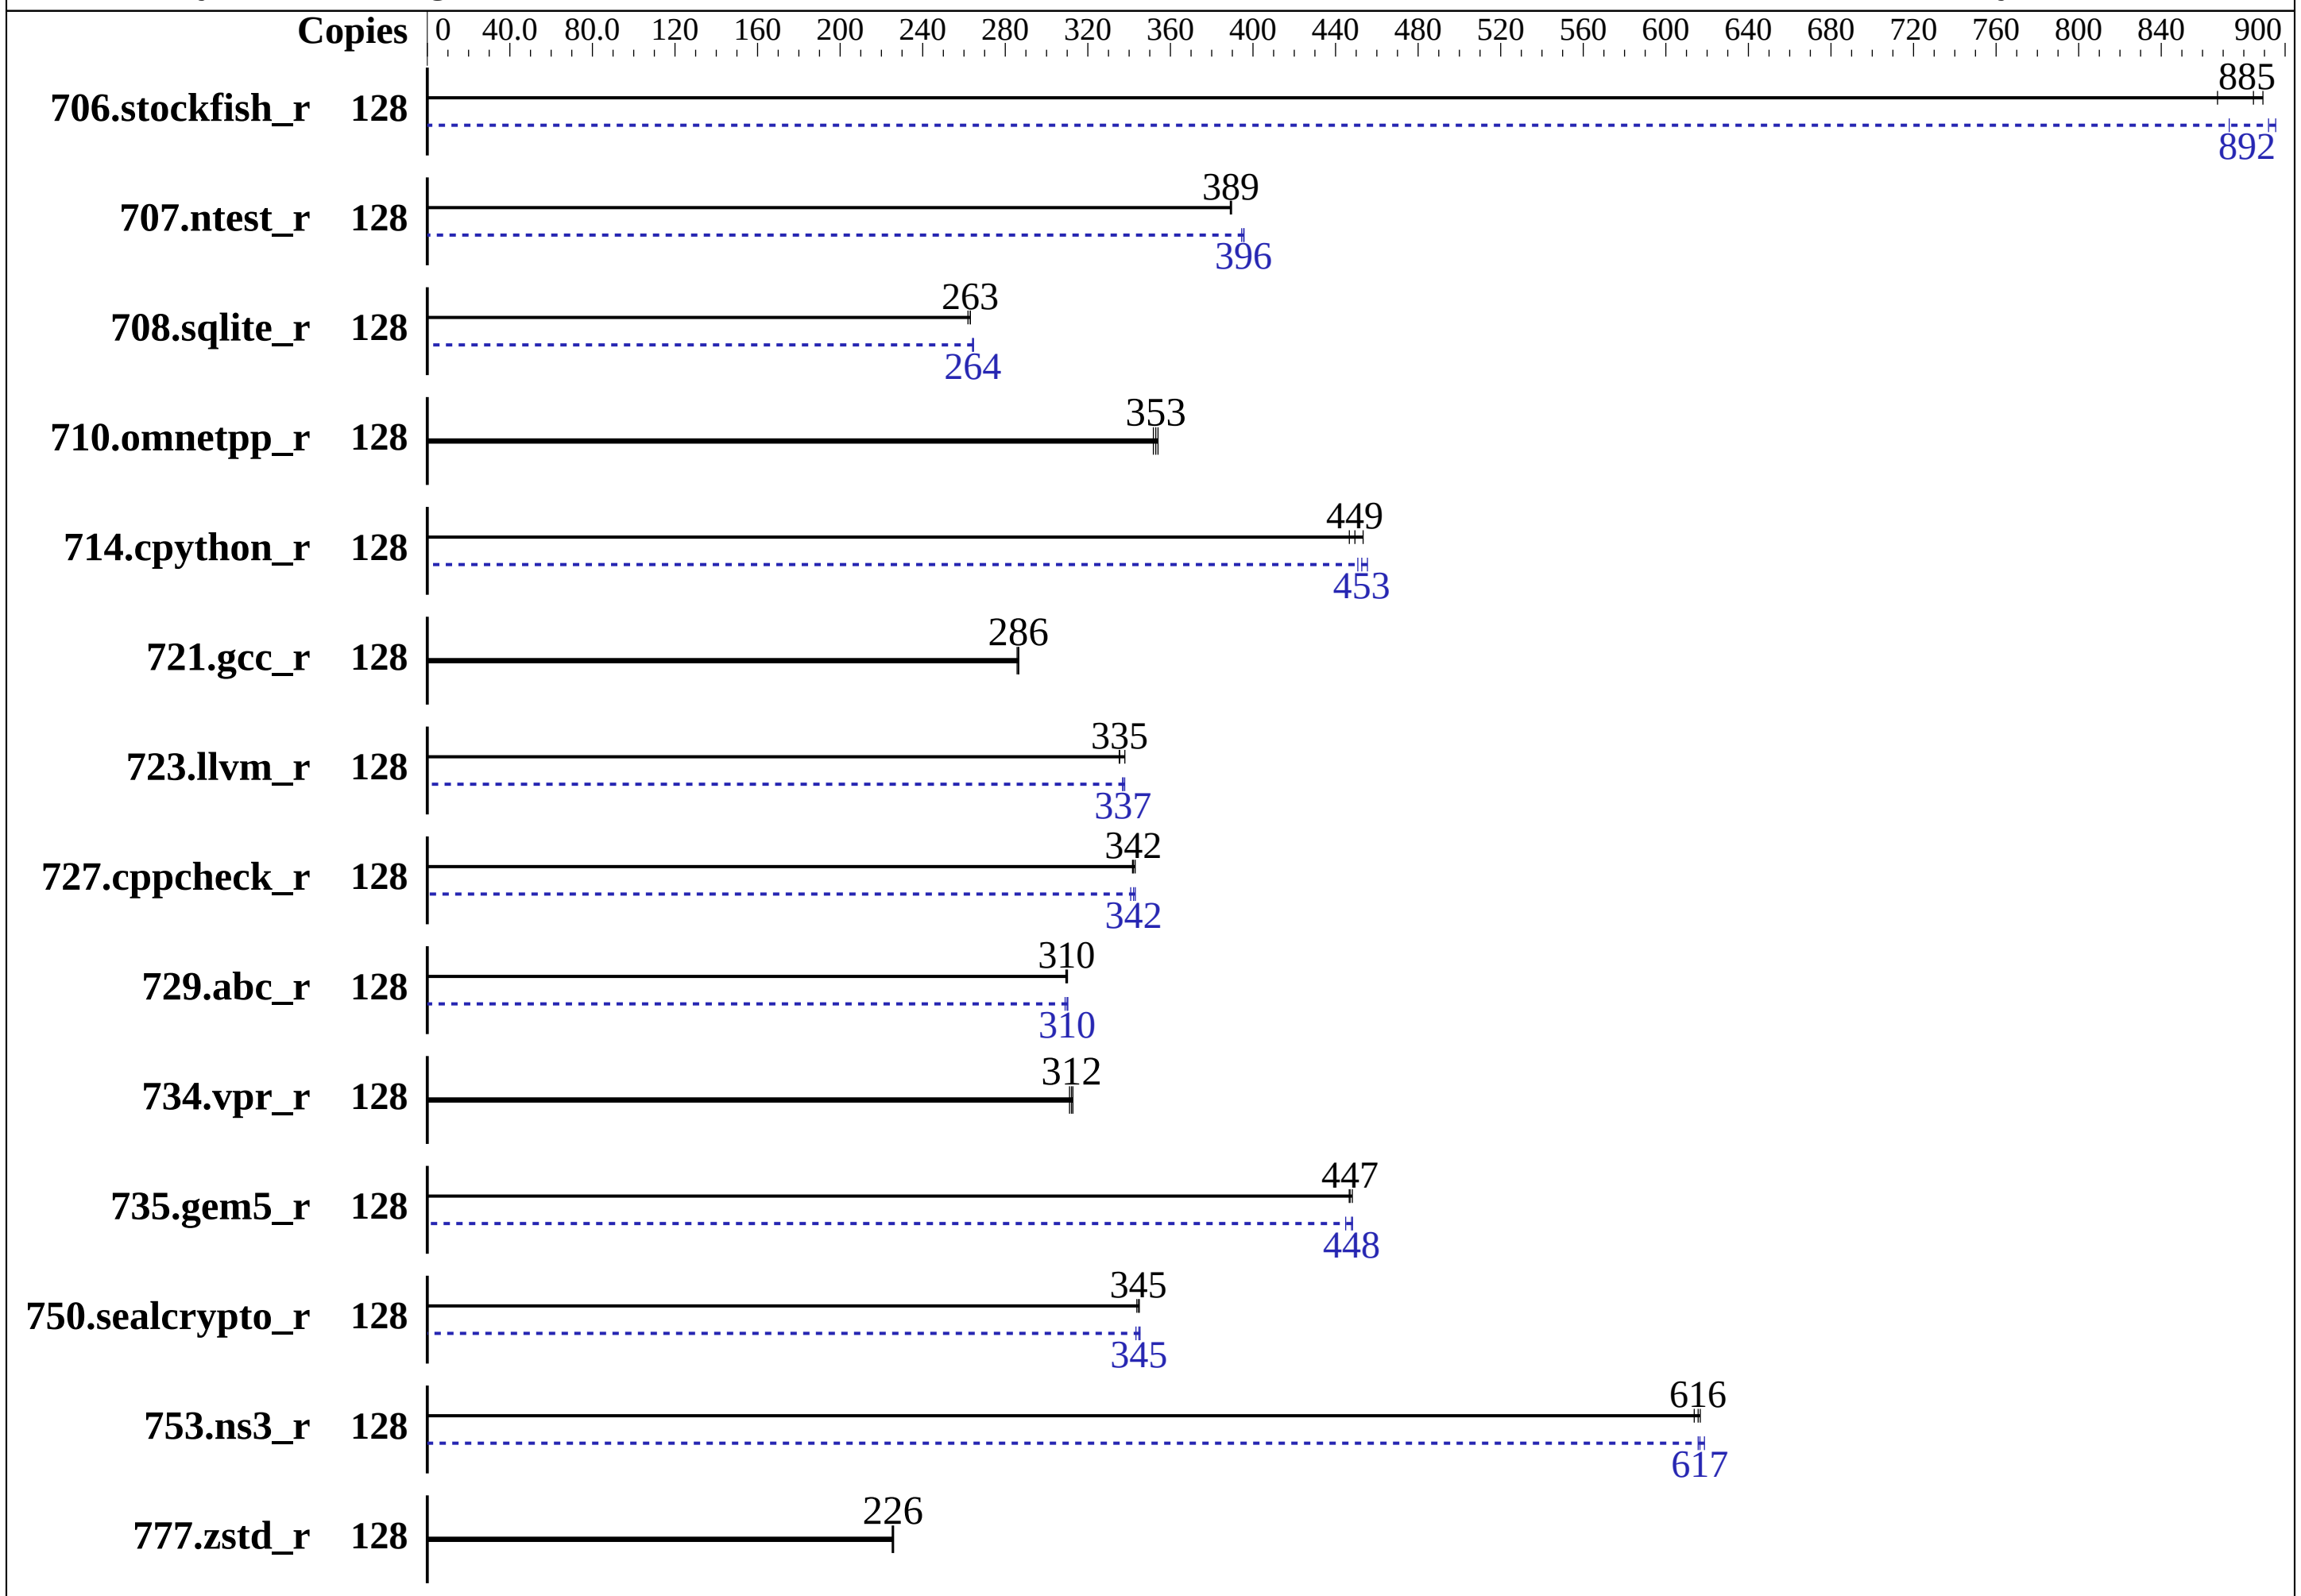

Hardware

CPU Name:	AMD EPYC 9335
Max MHz:	4400
Nominal:	3000
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 4 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Version 01.14.00 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Integer Rate Result

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9335)

SPECrate®2026_int_base = 372

SPECrate®2026_int_peak = 373

CPU2026 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026
Hardware Availability: Dec-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	128	181	889	**182**	**885**	186	867	128	**181**	**892**	185	873	180	895
707.ntest_r	128	194	390	195	389	**195**	**389**	128	192	396	**192**	**396**	192	395
708.sqlite_r	128	**257**	**263**	258	262	257	263	128	**256**	**264**	255	265	256	264
710.omnetpp_r	128	**176**	**353**	177	352	176	354	128	**176**	**353**	177	352	176	354
714.cpython_r	128	**136**	**449**	137	447	135	453	128	136	451	135	455	**135**	**453**
721.gcc_r	128	**307**	**286**	307	286	306	287	128	**307**	**286**	307	286	306	287
723.llvm_r	128	194	335	192	338	**193**	**335**	128	193	337	**193**	**337**	192	338
727.cppcheck_r	128	**134**	**342**	135	342	134	343	128	135	341	**134**	**342**	134	343
729.abc_r	128	**190**	**310**	190	309	189	310	128	189	310	190	309	**190**	**310**
734.vpr_r	128	189	313	**189**	**312**	190	311	128	189	313	**189**	**312**	190	311
735.gem5_r	128	139	448	**139**	**447**	140	447	128	140	445	139	448	**139**	**448**
750.sealcrypto_r	128	199	345	**199**	**345**	200	344	128	199	345	200	343	**199**	**345**
753.ns3_r	128	127	617	128	614	**127**	**616**	128	127	619	**127**	**617**	127	616
777.zstd_r	128	**365**	**226**	365	226	366	225	128	**365**	**226**	365	226	366	225
SPECrate®2026_int_base =	372													
SPECrate®2026_int_peak =	373													

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2026/amd_rate_aocc510_znver5_B_lib/lib:/home/CPU2026/amd_rate_
     aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

Platform Notes

```
 BIOS configuration:
 NUMA nodes per socket = NPS4
 Determinism Slider = Power
 cTDP Control = Manual
 cTDP = 500
 Package Power Limit Control = Manual
 Package Power Limit  = 500

 Sysinfo program /home/CPU2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Fri Jul 31 20:23:46 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
```


(Continued on next page)

Platform Notes (Continued)

```
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

 ------------------------------------------------------------
 2. w
    20:23:46 up 1 min,  1 user,  load average: 0.28, 0.12, 0.04
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                20:22   18.00s  3.47s  2.50s python3 ./run_amd_rate_aocc510_znver5_B1.py

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 6190465
   max locked memory       (kbytes, -l) 2048
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
```

(Continued on next page)

Platform Notes (Continued)

```
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190465
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_rate_aocc510_znver5_B1.py
 runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.042/templogs/preenv.intrate.042.0.log --lognum 042.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9335 32-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00215a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 32
    siblings        : 64
    2 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 0: apicids 0-63
    physical id 1: apicids 64-127
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
CPU op-mode(s):                 32-bit, 64-bit
Address sizes:                  52 bits physical, 57 bits virtual
Byte Order:                     Little Endian
CPU(s):                         128
On-line CPU(s) list:            0-127
Vendor ID:                      AuthenticAMD
Model name:                     AMD EPYC 9335 32-Core Processor
CPU family:                     26
Model:                          2
Thread(s) per core:             2
Core(s) per socket:             32
Socket(s):                      2
Stepping:                       1
Frequency boost:                enabled
CPU(s) scaling MHz:             63%
CPU max MHz:                    3000.0000
CPU min MHz:                    1500.0000
BogoMIPS:                       5991.17
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                                amd_lbr_pmc_freeze
Virtualization:                 AMD-V
L1d cache:                      3 MiB (64 instances)
L1i cache:                      2 MiB (64 instances)
L2 cache:                       64 MiB (64 instances)
L3 cache:                       256 MiB (8 instances)
NUMA node(s):                   8
NUMA node0 CPU(s):              0-7,64-71
NUMA node1 CPU(s):              8-15,72-79
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node2 CPU(s):                     16-23,80-87
  NUMA node3 CPU(s):                     24-31,88-95
  NUMA node4 CPU(s):                     32-39,96-103
  NUMA node5 CPU(s):                     40-47,104-111
  NUMA node6 CPU(s):                     48-55,112-119
  NUMA node7 CPU(s):                     56-63,120-127
  Vulnerability Gather data sampling:    Not affected
  Vulnerability Itlb multihit:           Not affected
  Vulnerability L1tf:                    Not affected
  Vulnerability Mds:                     Not affected
  Vulnerability Meltdown:                Not affected
  Vulnerability Mmio stale data:         Not affected
  Vulnerability Reg file data sampling:  Not affected
  Vulnerability Retbleed:                Not affected
  Vulnerability Spec rstack overflow:    Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                         always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                   Not affected
  Vulnerability Tsx async abort:         Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         1M      64M   16 Unified         2  1024        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-7,64-71
  node 0 size: 193016 MB
  node 0 free: 192545 MB
  node 1 cpus: 8-15,72-79
  node 1 size: 193531 MB
  node 1 free: 193151 MB
  node 2 cpus: 16-23,80-87
  node 2 size: 193531 MB
  node 2 free: 193144 MB
  node 3 cpus: 24-31,88-95
  node 3 size: 193531 MB
  node 3 free: 193226 MB
  node 4 cpus: 32-39,96-103
  node 4 size: 193531 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 4 free: 193071 MB
    node 5 cpus: 40-47,104-111
    node 5 size: 193531 MB
    node 5 free: 192991 MB
    node 6 cpus: 48-55,112-119
    node 6 size: 193531 MB
    node 6 free: 193112 MB
    node 7 cpus: 56-63,120-127
    node 7 size: 193438 MB
    node 7 free: 193038 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  12  12  12  32  32  32  32
      1:  12  10  12  12  32  32  32  32
      2:  12  12  10  12  32  32  32  32
      3:  12  12  12  10  32  32  32  32
      4:  32  32  32  32  10  12  12  12
      5:  32  32  32  32  12  10  12  12
      6:  32  32  32  32  12  12  10  12
      7:  32  32  32  32  12  12  12  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       1584787004 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Jul 31 20:22

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target  Status
    multi-user      running

  ------------------------------------------------------------
  12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                     nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
    enabled-runtime  systemd-remount-fs
    disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                     chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                     firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                     kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                     serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
                     systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
```

(Continued on next page)

Platform Notes (Continued)

```
                systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
  indirect        systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 1:
    current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            0
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                       8
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                        1
  vm.watermark_boost_factor        15000
```

(Continued on next page)

Platform Notes (Continued)

```
    vm.watermark_scale_factor          10
    vm.zone_reclaim_mode                1

  ------------------------------------------------------------
  17. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

  ------------------------------------------------------------
  18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                      1
    max_ptes_none             511
    max_ptes_shared           256
    max_ptes_swap              64
    pages_to_scan            4096
    scan_sleep_millisecs    10000

  ------------------------------------------------------------
  19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP7

  ------------------------------------------------------------
  20. Disk information
  SPEC is set to: /home/CPU2026
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p2 xfs   929G   74G  855G   8% /

  ------------------------------------------------------------
  21. /sys/devices/virtual/dmi/id
      Vendor:         Maginfra
      Product:        QR8228-D3
      Product Family: Not specified
      Serial:         00000000

  ------------------------------------------------------------
  22. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
      11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
```

(Continued on next page)

Platform Notes (Continued)

```
     1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      01.14.00
    BIOS Date:         12/25/2025
```

Compiler Version Notes

```
==============================================================================
C       | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
        | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,
        | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,
        | peak) 750.sealcrypto_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Benchmarks using both C and C++:
`clang++ clang`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc
```

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Benchmarks using both C and C++:
`clang++ clang`

Peak Optimization Flags

C benchmarks:

708.sqlite_r: -m64 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-lamdlibm -lamdalloc -lflang

714.cpython_r: Same as 708.sqlite_r

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

707.ntest_r: Same as 706.stockfish_r

727.cppcheck_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3

(Continued on next page)

Peak Optimization Flags (Continued)

727.cppcheck_r (continued):
-march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lamdalloc -lflang

753.ns3_r: Same as 727.cppcheck_r

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc

729.abc_r: Same as 723.llvm_r

734.vpr_r: basepeak = yes

735.gem5_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc -lflang

750.sealcrypto_r: Same as 723.llvm_r

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-31 20:23:46-0400.
Report generated on 2026-09-23 13:08:24 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-22.