SPEC CPU®2026 Floating Point Rate Result

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6736P, 2.00GHz

SPECrate®2026_fp_base = 428

SPECrate®2026_fp_peak = Not Run

CPU2026 License:	19	**Test Date:**	Sep-2026
Test Sponsor:	Fujitsu	**Hardware Availability:**	Oct-2025
Tested by:	Fsas Technologies Inc.	**Software Availability:**	Apr-2026

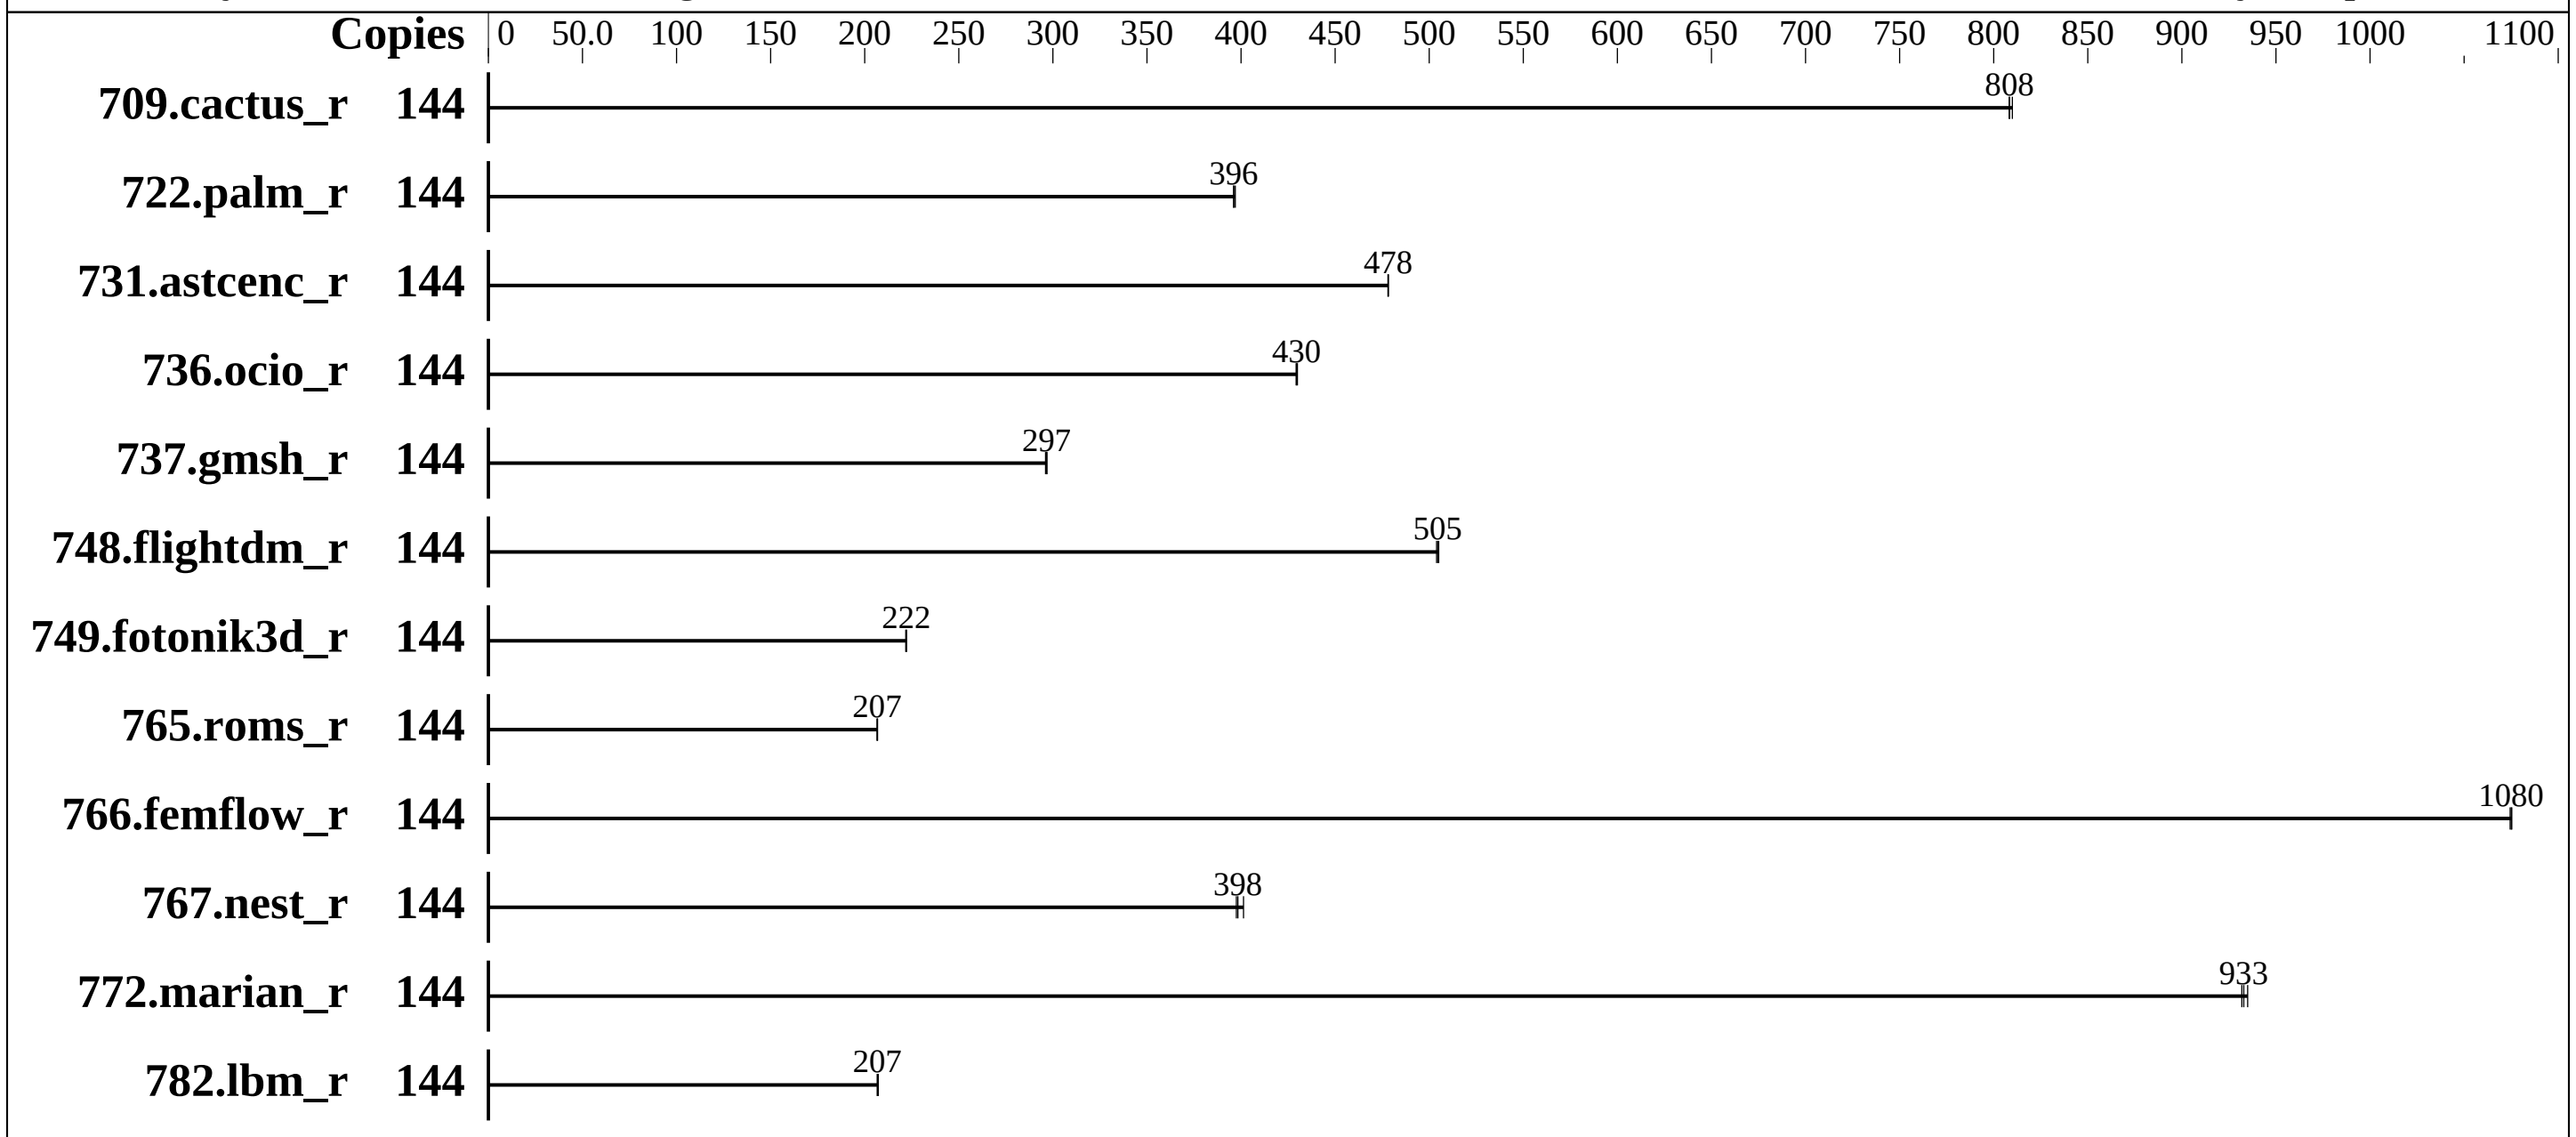

Hardware

CPU Name:	Intel Xeon 6736P
Max MHz:	4100
Nominal:	2000
Enabled:	72 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	144 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x PCIe SSD, 1.92TB
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Fsas Technologies Inc. BIOS Version V1.0.0.0 R1.5.0 for D4135-A1x. Released Apr-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Fsas Technologies Inc.
(Test Sponsor: Fujitsu)
PRIMERGY RX2540 M8, Intel Xeon 6736P, 2.00GHz

SPECrate®2026_fp_base = 428
SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.
Test Date: Sep-2026
Hardware Availability: Oct-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	144	153	808	**153**	**808**	153	810							
722.palm_r	144	479	397	**480**	**396**	480	396							
731.astcenc_r	144	253	478	**253**	**478**	253	478							
736.ocio_r	144	293	430	294	429	**293**	**430**							
737.gmsh_r	144	223	297	**223**	**297**	223	296							
748.flightdm_r	144	204	505	**204**	**505**	205	504							
749.fotonik3d_r	144	**749**	**222**	750	222	749	222							
765.roms_r	144	**1098**	**207**	1097	207	1098	207							
766.femflow_r	144	197	1070	**197**	**1080**	196	1080							
767.nest_r	144	**287**	**398**	287	398	285	401							
772.marian_r	144	244	932	243	935	**244**	**933**							
782.lbm_r	144	398	207	**399**	**207**	399	207							

SPECrate®2026_fp_base = **428**

SPECrate®2026_fp_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Fan Control = Full
CPU Performance Boost = Aggressive
Latency Optimized Mode = Enabled
UPI Link Frequency Select = 16.0GT/s
BIOS Date reported by dmidecode represents the internal BIOS build date.

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Thu Sep  3 02:50:33 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
   02:50:33 up 1 min,  1 user,  load average: 2.69, 1.39, 0.54
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    192.168.10.106   02:49    8.00s  1.35s  0.12s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2062237
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2062237
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --copies 144 -c
   ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=72 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base -n 3 -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --copies 144 --configfile
```

(Continued on next page)

Platform Notes (Continued)

```
    ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=72 --define
    physicalfirst --define invoke_with_interleave --define drop_caches --tune base --iterations 3
    --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
    --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6736P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 36
    siblings        : 72
    2 physical ids (chips)
    144 processors (hardware threads)
    physical id 0: core ids 0-35
    physical id 1: core ids 0-35
    physical id 0: apicids 0-71
    physical id 1: apicids 128-199
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                          x86_64
  CPU op-mode(s):                        32-bit, 64-bit
  Address sizes:                         52 bits physical, 57 bits virtual
  Byte Order:                            Little Endian
  CPU(s):                                144
  On-line CPU(s) list:                   0-143
  Vendor ID:                             GenuineIntel
  Model name:                            Intel(R) Xeon(R) 6736P
  CPU family:                            6
  Model:                                 173
  Thread(s) per core:                    2
  Core(s) per socket:                    36
  Socket(s):                             2
  Stepping:                              1
  CPU(s) scaling MHz:                    23%
  CPU max MHz:                           4100.0000
```

(Continued on next page)

Platform Notes (Continued)

```
  CPU min MHz:                           800.0000
  BogoMIPS:                              4000.00
  Flags:                                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                         ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                         vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                         rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                         clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                         arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                                         avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                         bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                         serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                         amx_int8 flush_l1d arch_capabilities
  Virtualization:                        VT-x
  L1d cache:                             3.4 MiB (72 instances)
  L1i cache:                             4.5 MiB (72 instances)
  L2 cache:                              144 MiB (72 instances)
  L3 cache:                              288 MiB (2 instances)
  NUMA node(s):                          2
  NUMA node0 CPU(s):                     0-35,72-107
  NUMA node1 CPU(s):                     36-71,108-143
  Vulnerability Gather data sampling:    Not affected
  Vulnerability Itlb multihit:           Not affected
  Vulnerability L1tf:                    Not affected
  Vulnerability Mds:                     Not affected
  Vulnerability Meltdown:                Not affected
  Vulnerability Mmio stale data:         Not affected
  Vulnerability Reg file data sampling:  Not affected
  Vulnerability Retbleed:                Not affected
  Vulnerability Spec rstack overflow:    Not affected
  Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                   Not affected
  Vulnerability Tsx async abort:         Not affected

From lscpu --cache:
```

(Continued on next page)

Platform Notes (Continued)

```
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL    SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     3.4M   12 Data            1      64        1             64
      L1i       64K     4.5M   16 Instruction     1      64        1             64
      L2         2M     144M   16 Unified         2    2048        1             64
      L3       144M     288M   16 Unified         3 147456        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0-35,72-107
   node 0 size: 257597 MB
   node 0 free: 256582 MB
   node 1 cpus: 36-71,108-143
   node 1 size: 257988 MB
   node 1 free: 257033 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       527960496 kB

 ------------------------------------------------------------
 10. who -r
   run-level 3 Sep 3 02:49

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
   Default Target  Status
   multi-user      running

 ------------------------------------------------------------
 12. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                    issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                    nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                    wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
   enabled-runtime  systemd-remount-fs
   disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                    firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                    man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
```

(Continued on next page)

Platform Notes (Continued)

```
                 systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                 systemd-timesyncd vncserver@
  indirect       systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=6490486a-f020-45c4-b83e-03e98fc56a3b
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  tsx=auto

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 80:
    current policy: frequency should be within 800 MHz and 4.10 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/cpu2026
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  1.9T  157G  1.8T   9% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Fsas Technologies
    Product:        PRIMERGY RX2540 M8
    Product Family: SERVER
    Serial:         xxxxxxxxxx

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x Hynix HMCG88AHBRA478N 32 GB 2 rank 6400
    4x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:         Fsas Technologies
    BIOS Version:        V1.0.0.0 R1.5.0 for D4135-A1x
    BIOS Date:           03/06/2026
    BIOS Revision:       1.5
    Firmware Revision: 3.12
```

Compiler Version Notes

```
==============================================================================
C        | 782.lbm_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++      | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
         | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C   | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both C and C++:
`icpx icx`

Base Portability Flags

737.gmsh_r: `-fno-associative-math`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:
```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.xml

Tested with SPEC CPU®2026 v1.0.1 on 2026-09-02 13:50:32-0400.
Report generated on 2026-09-23 13:08:03 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-22.